



Mini-Circuits®

CERAMIC

Low Pass Filter

LFCN-120+

50Ω


DC¹ to 120 MHz

FEATURES

- Excellent Power Handling, 8.5 W
- Small Size
- 7 Sections
- Temperature Stable
- LTCC Construction
- Protected by U.S Patent 6,943,646

APPLICATIONS

- Harmonic Rejection
- VHF/UHF Transmitters/Receivers



Generic photo used for illustration purposes only

CASE STYLE: FV1206

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-120		1.0	dB
	Freq. Cut-Off	F2	195	3.0		dB
	VSWR	DC-F1	DC-120	1.2		:1
Stopband	Rejection Loss	F3	280	20		
		F4-F5	300-1850	40		dB
		F6	4750	20		
	VSWR	F3-F6	280-4750	20		:1

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


2. Measured on Mini-Circuits Characterization Test Board TB-LFCN-120+.

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input ³	8.5 W max. at +25°C

3. Passband rating, derate linearly to 3.5 W at +100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

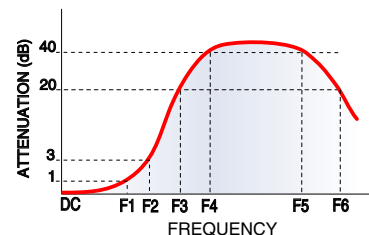

FUNCTIONAL SCHEMATIC

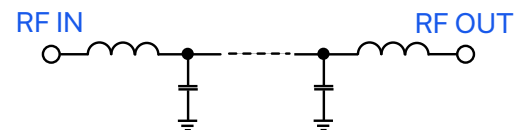

Mini-Circuits®



Mini-Circuits®

CERAMIC

Low Pass Filter

LFCN-120+


50Ω

DC¹ to 120 MHz

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4


PRODUCT MARKING: RF

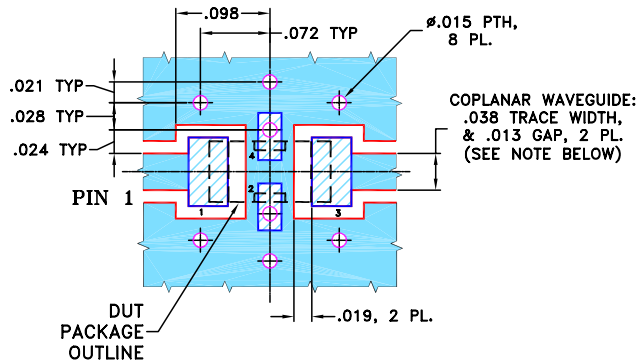DEMO BOARD MCL P/N: TB-LFCN-120+
SUGGESTED PCB LAYOUT (PL-137)


NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

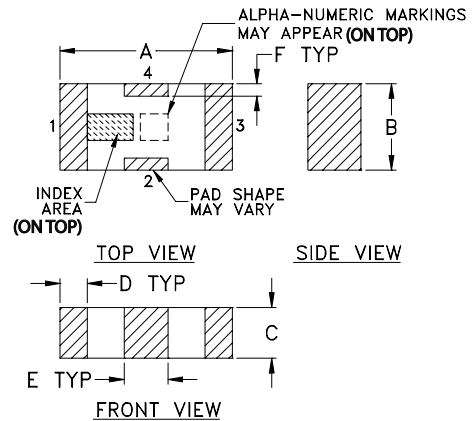

PCB Land Pattern

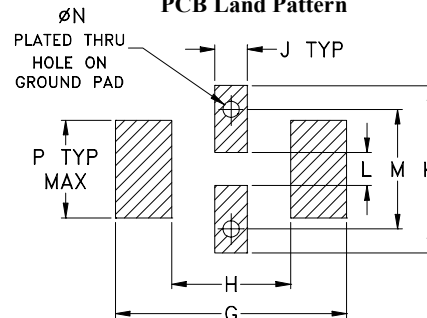

Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches
mm)

A	B	C	D	E	F	G	
.126	.063	.037	.020	.032	.009	.169	
3.20	1.60	0.94	0.51	0.81	0.23	4.29	
H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

TAPE & REEL INFORMATION: F71



Mini-Circuits

CERAMIC

Low Pass Filter


LFCN-120+

50Ω

DC¹ to 120 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.13	1.04
100	0.68	1.10
120	0.83	1.08
135	0.96	1.08
195	2.89	1.73
270	32.22	4.45
280	41.07	4.55
285	44.02	4.61
300	47.56	4.86
920	65.79	78.97
1100	54.38	78.97
1850	48.59	78.97
2000	44.58	75.53
4000	27.36	62.05
4750	25.27	48.26

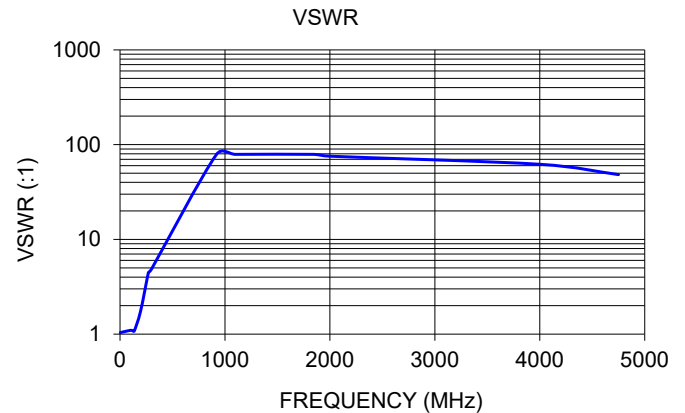

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

