

Power Divider, 4-way, 0.5-18GHz, SMA Female

WM4PD-0.5-18-S





Parameter	Min.	Typ.	Max.	Unit
Frequency Range	500		18000	MHz
Impedance		50		Ω
Return Loss (Port S)	11	14		dB
Return Loss (Ports 1-4)	13	18		dB
Insertion Loss (above 6.02dB)	500-8000MHz	0.9	1.8	dB
	8000-12000MHz	1.4	2.8	
	12000-18000MHz	2.5	3.9	
Isolation	500-698MHz	12	-	dB
	698-18000MHz	15		dB
Amplitude Balance		0.3	1.9	dB
Phase Balance		2	18	Degree
Input Power (CW) ¹		20		W, max



Connector Interface	SMA-Female
Operating Temperature ²	-55 to +85 °C
Storage Temperature	-55 to +100 °C
Nominal Weight	410 g (14 oz)
Operating Humidity	10-90% (non-condensing)
Operating Environment	Indoor Use Only
HTSUS Code	8548.00.0000
ECCN	EAR99

RoHS Status ³	RoHS3 Compliant
REACH Status ³	REACH Unaffected
Enclosure Material	Aluminum
Connectors Material	Stainless Steel
Contacts Material	Beryllium Copper, Gold Plated
Insulators Material	Virgin PTFE
Finish	Green Paint
Country of Origin	United States of America



1. All output ports should be terminated in a 50-ohm load with 1.2:1 max VSWR.
2. Electrical specification at +25 °C only.
3. To the best of our knowledge at the time of publication.

Typical Performance at +25 °C

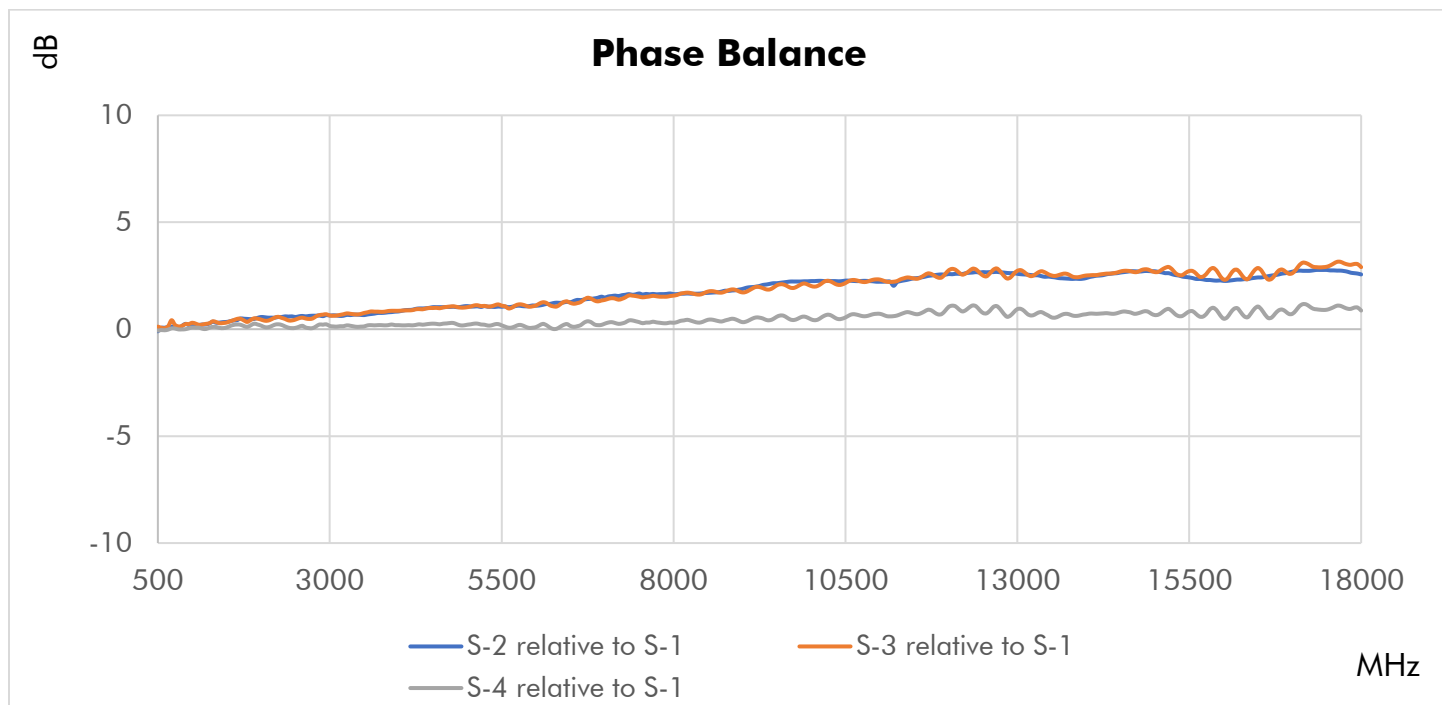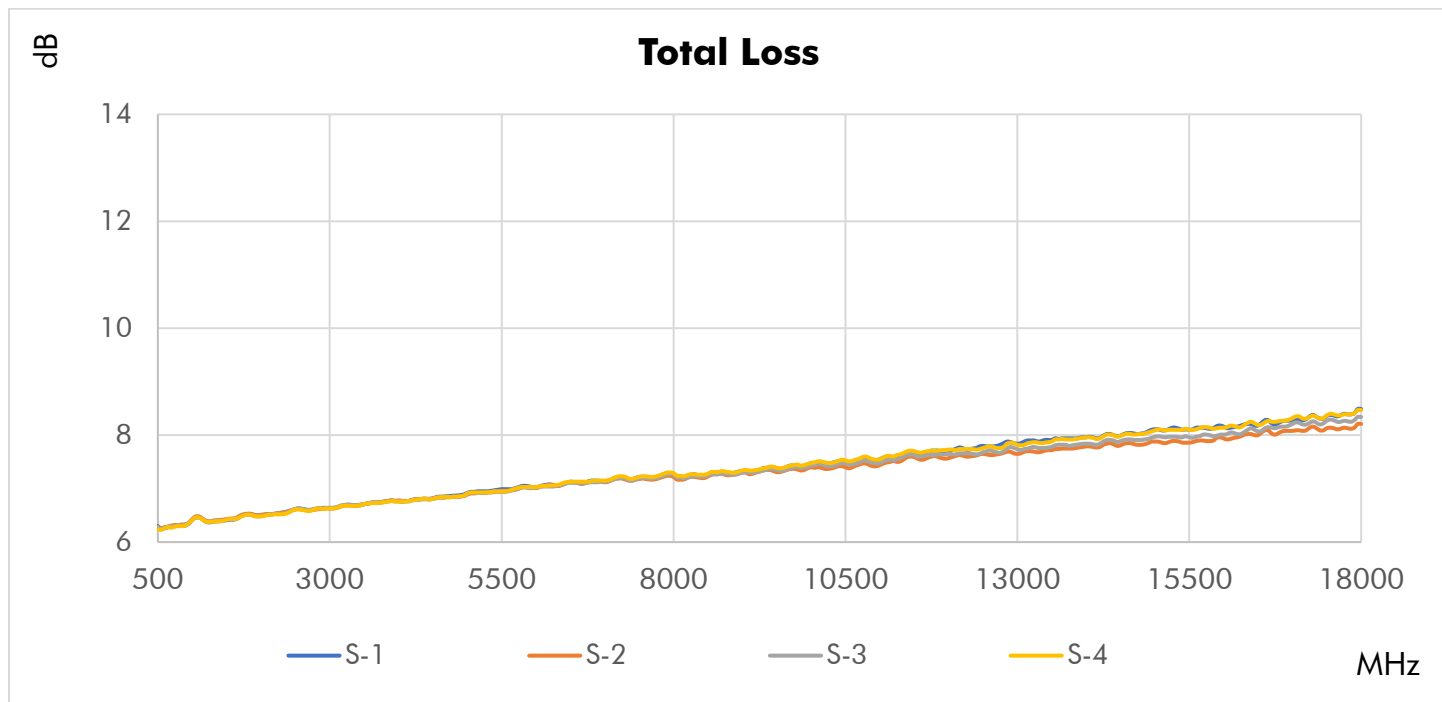

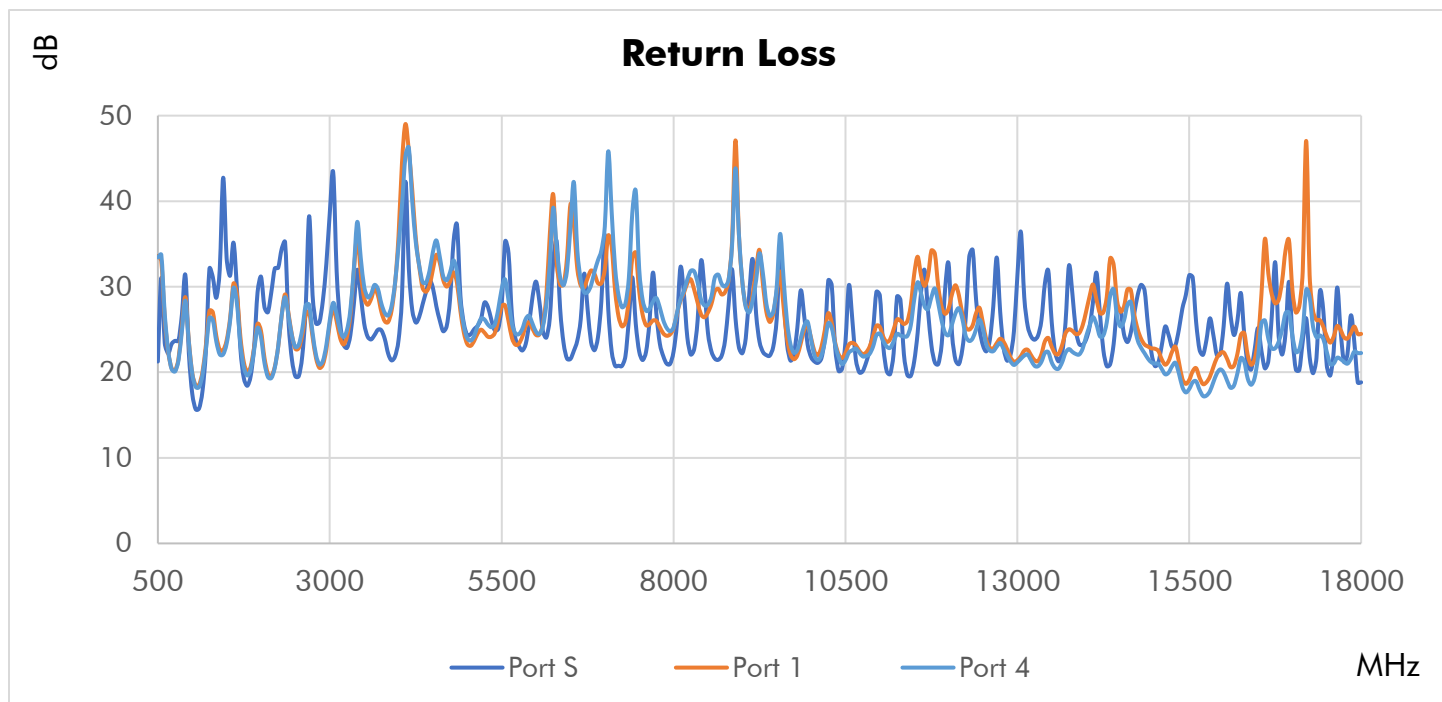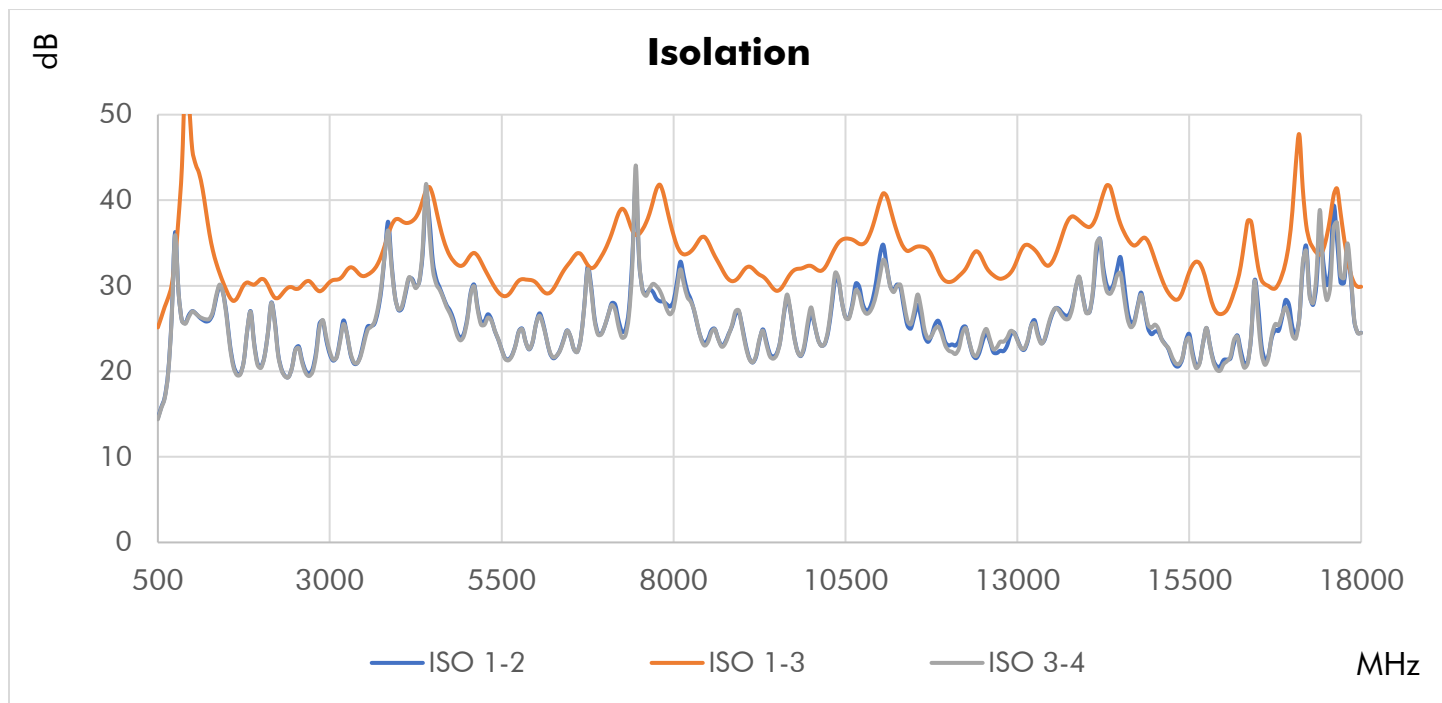


Repeatability in Production

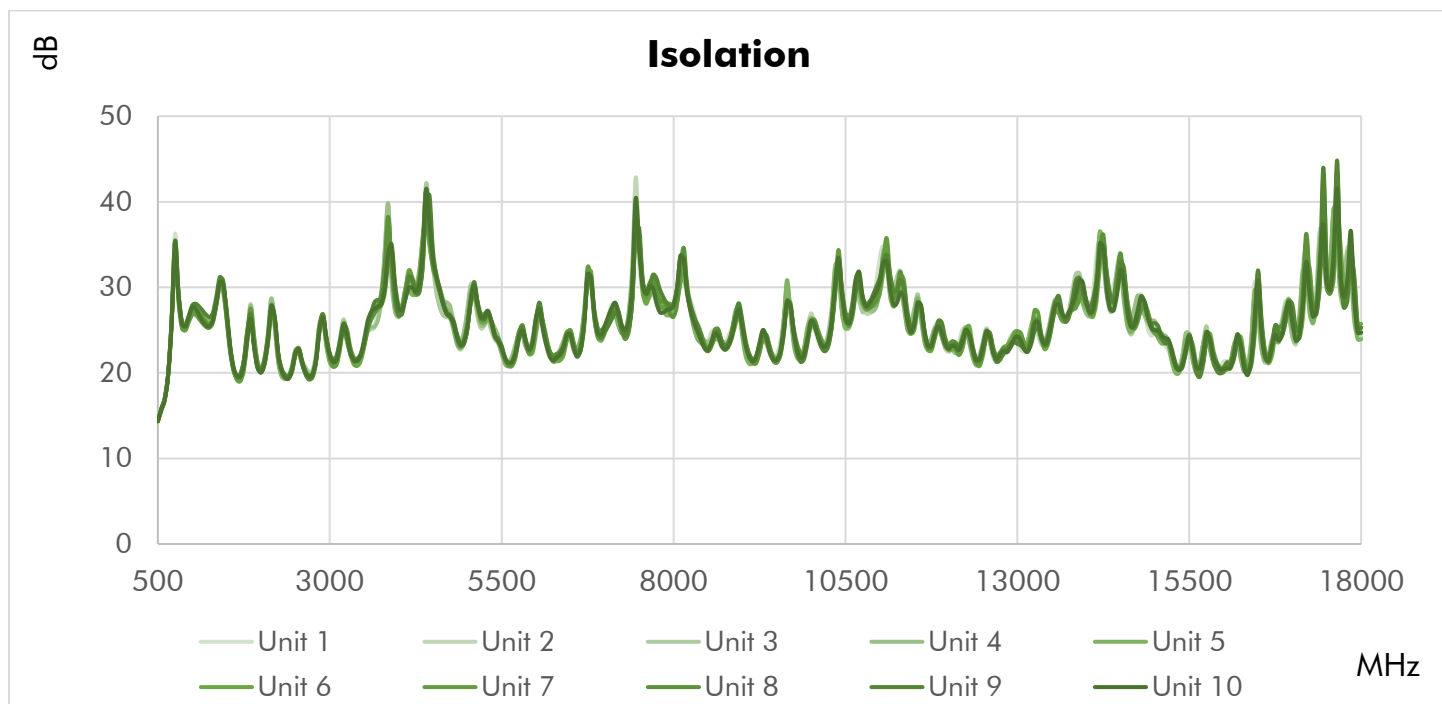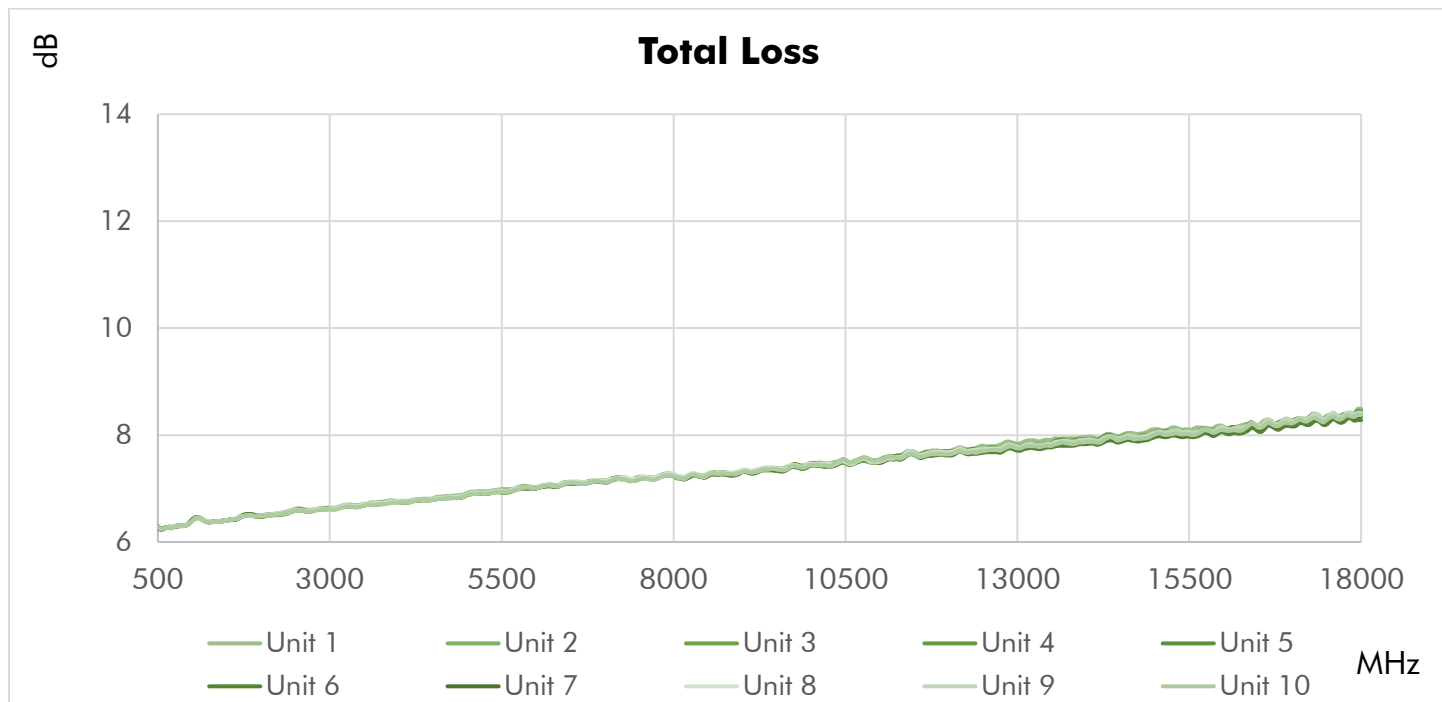


Typical Performance Data

Frequency (MHz)	Return Loss (dB)			Total Loss (dB)		Isolation (dB)
	Port S	Port 1	Port 4	S-1	S-4	
500	19.8	33.4	19.8	6.3	6.3	15.4
1000	18.1	23.2	18.1	6.4	6.4	26.6
1500	21.4	22.3	21.4	6.4	6.3	27.3
2000	25.0	24.7	25.0	6.5	6.5	20.2
2500	17.4	24.4	17.4	6.7	6.7	17.8
3000	20.9	23.4	20.9	6.7	6.6	20.5
3500	33.5	32.0	33.4	6.7	6.7	20.9
4000	16.7	35.9	16.7	6.8	6.8	23.3
4500	26.2	37.7	26.2	6.8	6.8	25.9
5000	32.3	27.8	32.1	6.8	6.8	22.9
5500	17.5	26.5	17.5	7.0	7.0	21.2
6000	28.1	31.3	28.0	7.0	7.0	19.8
6500	24.3	31.3	24.4	7.0	7.0	19.8
7000	19.6	29.5	19.6	7.1	7.1	22.1
7500	39.7	29.8	40.0	7.2	7.2	24.6
8000	23.0	31.6	23.1	7.2	7.3	23.9
8500	18.7	36.2	18.7	7.4	7.4	22.3
9000	37.8	30.6	38.0	7.3	7.4	20.8
9500	18.8	29.6	18.8	7.5	7.5	21.0
10000	18.6	22.2	18.6	7.4	7.4	20.2
10500	23.3	23.6	23.3	7.8	7.7	22.3
11000	15.2	22.6	15.2	7.6	7.7	22.5
11500	24.7	32.1	24.8	7.7	7.7	23.7
12000	23.0	29.3	23.0	7.8	7.8	19.7
12500	17.6	23.4	17.6	7.9	7.9	20.6
13000	24.5	23.4	24.4	8.1	8.1	19.4
13500	26.4	22.3	26.4	7.9	7.9	21.4
14000	18.9	25.6	18.9	8.2	8.2	21.9
14500	22.5	23.3	22.6	8.1	8.1	28.1
15000	20.7	19.7	20.7	8.3	8.3	21.0
15500	22.6	22.6	22.6	8.3	8.3	21.6
16000	29.1	25.3	29.0	8.3	8.3	18.8
16500	13.6	33.2	13.6	8.8	8.8	19.3
17000	18.7	23.4	18.7	8.6	8.6	18.8
17500	25.0	26.0	25.1	8.6	8.6	28.2
18000	15.9	21.5	15.9	8.9	8.9	21.2
18500	21.6	27.9	21.5	8.8	8.7	18.9
19000	27.7	17.4	27.6	8.6	8.7	19.0
19500	16.0	23.5	16.0	9.3	9.3	16.1
20000	22.3	23.6	22.2	9.1	9.1	18.1

Simplified Electrical Schematic

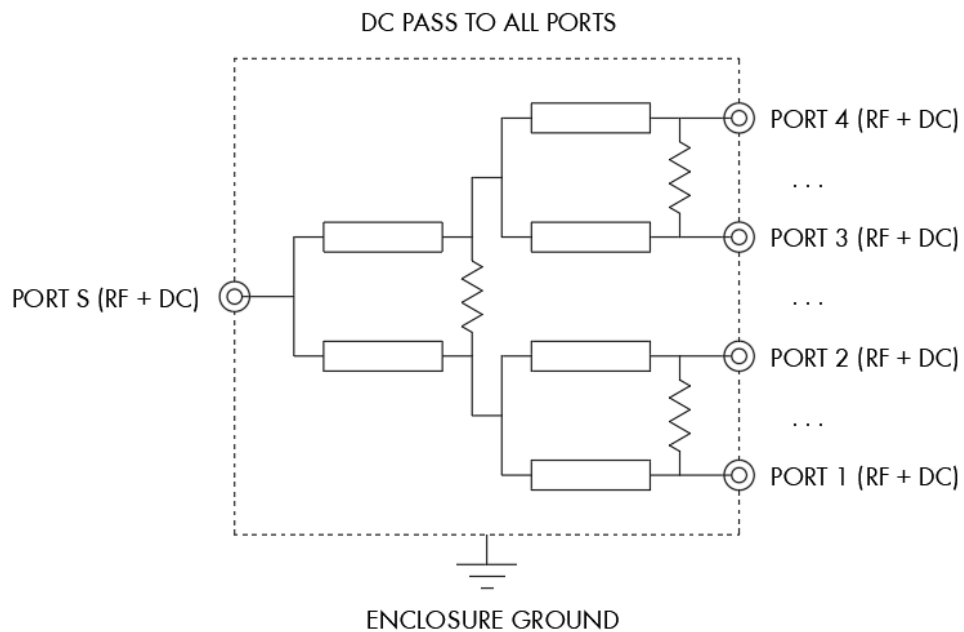

Outline Dimensions

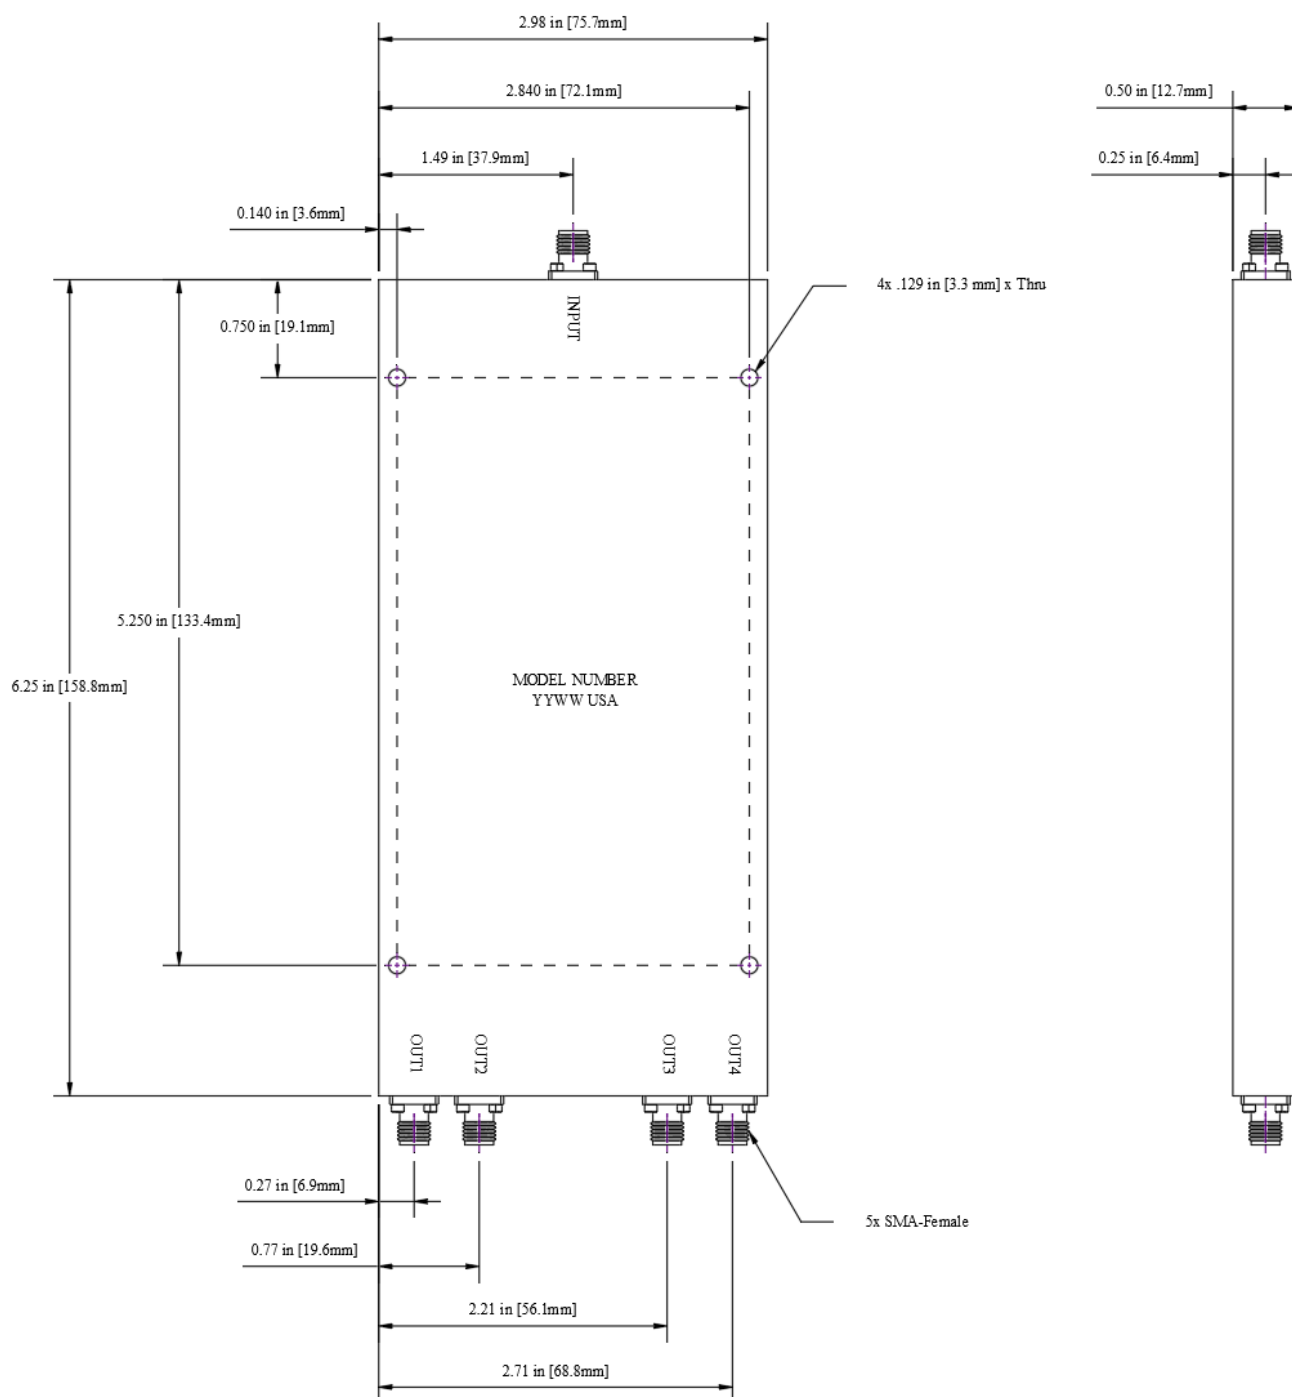

Outline drawing: OL-4185

Dimensions are in inches, [mm] shown for convenience.

Tolerances on 2-pl decimals: $\pm .03$. 3-pl decimals: $\pm .015$. Angles: $\pm 1^\circ$.

The information contained in this document is accurate to the best of our knowledge and representative of the product described herein at the date of publication. It may be necessary to make modifications to the product and/or documentation of the product. Werbel Microwave LLC reserves the right to make such changes as required without notice. Unless otherwise stated, all specifications and dimensions are nominal. Werbel Microwave LLC does not make any representation or warranty regarding the suitability of the product described herein for any particular purpose or application, and Werbel Microwave LLC does not assume any liability arising out of the use of any part of documentation. This document gives only a description of the product(s) and shall not form part of any contract. Please contact a Werbel Microwave LLC Applications Engineer for the most current specification drawing.

Reliability testing was performed as an internal requalification of the product to substantiate the published specifications, which were previously arrived at by calculation and/or similarity to existing products. The results of these tests are provided as a courtesy and shall not form part of a contract or warranty. While reliability tests may depict the product being tested beyond the published specification ratings for the purpose of stress testing the product, this does not imply that the product should be operating above the rated limits for any length of time. Specifications related to reliability (e.g., performance over temperature, power handling, DC current, HI-POT) are "designed to meet" and are not individually tested in production of commercially available products. Please contact a Werbel Microwave LLC Applications Engineer if specific reliability testing is needed on a particular product.