


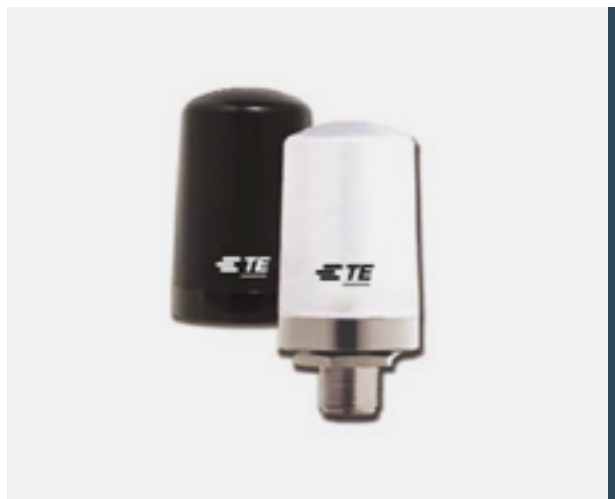

PHANTOM

800 MHz - 5.8 GHz Antennas

Unique, patented Phantom antennas are ideal for cell, GSM, PCE, WIFI, 802.11 and Bluetooth wireless applications. Measuring only 2.7" tall, the Phantom 800 MHz to 5.8 GHz antenna models' revolutionary design features a robust IP67 rated mechanical solution with frequency agility, low visibility, wide bandwidth and a low angle radiation pattern that is superior to traditional gain antennas in most applications, both outdoor and indoor. The industry standard NMO mounting socket mates with our magnetic, trunk lid, and hole mounts. A threaded permanent stud mount model is also available for vandal resistant mounting on brackets, panels, ceilings or any other kind of housing. The Phantom patented technology is beneficial when high performance is desired and extreme ruggedness and low profile is required.

FEATURES AND BENEFITS

- A low profile mechanically robust high-power solution
- Outperforms a 3-dB whip in many applications
- U.S. Patent Nos. 5,977,931 – 6,292,156 and 7,209,096

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	806-870/821-896/890-960/902-928/1850-1990/2400-2500/4900-6000
VSWR	< 2.1
Gain (dBi)	3
Max Power - Ambient 25°C (W)	100
Nominal Impedance (Ohms)	50
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	130 x 360

MECHANICAL SPECIFICATIONS

Dimensions – diameter x height – mm (inches)	36.52 x 69.85 (1.438 x 2.75)
Weight – kg (lbs.)	0.078 (0.173)
Material	SABIC Lexan
Color	Black or White
Mounting Information	NMO (PN: MB8, MAB8) – Sold separately
Noise Suppressor	BlackHawk NS1535
1-35 VOLT, 15 Amp – Sold separately	1-35 VOLT, 15 Amp – Sold separately
Operating Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)

CONFIGURATION

PART NUMBER	DESCRIPTION
TRA8063	806-870 MHz 3 dBi Phantom® ¾ NMO, White Radome
TRA8903	890-960 MHz 3 dBi Phantom® ¾ NMO, White Radome
TRA9023	902-928 MHz 3 dBi Phantom® ¾ NMO, White Radome
TRA24003	2.4 – 2.5 GHz 3 dBi Phantom® ¾ NMO, White Radome
TRA58003	4.9 – 6.0 GHz 3 dBi Phantom® ¾ NMO, White Radome
TRADCAGP	G - Drop ceiling antenna adaptor for P-mount Phantom w/ 6"x6"x0.016" ground plane

Note:


Add "B" to model number for black radome. Example: TRAB8063

Add "N" to model for No Ground Plane Required models. Example TRAB8063N


Add "P" to model number for Permanent Mount. Example: TRA8063Px

Add "NP" to model for No Ground Plane Required, Permanent Mount models. Example TRA8903NP

ANTENNA PATTERNS

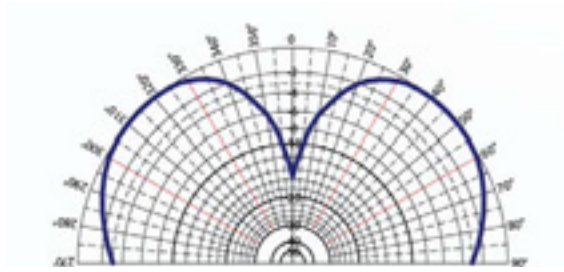

**Elevation Pattern (Y, Z, or H-plane)
Normalized to 3 Db-MEG**

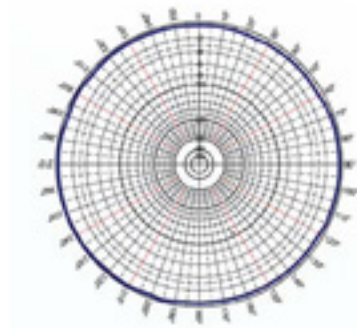

**Azimuth Pattern (X,Y, or E-plane)
Normalized to 3 dB-MEG**

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original