



## CAXX Series

### RF Cable Assembly DC-7 GHz

The TE Connectivity CA178 cable assemblies are engineered for peak performance up to 7 GHz. They are 100% tested and certified to meet performance specifications. Equipment manufacturers require certified cable assemblies to minimize system losses to within known parameters and these cable assemblies meet those requirements. The manufacturing processes and raw materials are well controlled in order to provide very consistent performance from lot to lot.

### FEATURES AND BENEFITS

- Consistent low loss design construction
- 100% tested and certified to meet specifications
- Various connector options available
- Flexible high temperature kink resistant cable jacket



### APPLICATIONS

- High performance wireless systems
- OEM equipment
- WiMAX

### SPECIFICATIONS

Model Name	CA178-NFB-UFL-8	CA178-NFB-UFL-12
Insertion Loss (dB) - max	-1.5	-2.5
Length - mm (inches)	203 (8.0)	305 (12.0)
Weight - g (lbs.)	40.0 (1.4)	43.0 (1.5)
Connector Types	N-Female bulkhead - UFL	
N Connector Seal	O-ring	
Contact Plating	Gold	
Operating Temperature - °C (°F)	-40 to +125°C (-22 to +158°F)	
Material Substance Compliance	RoHS	

### INSERTION LOSS

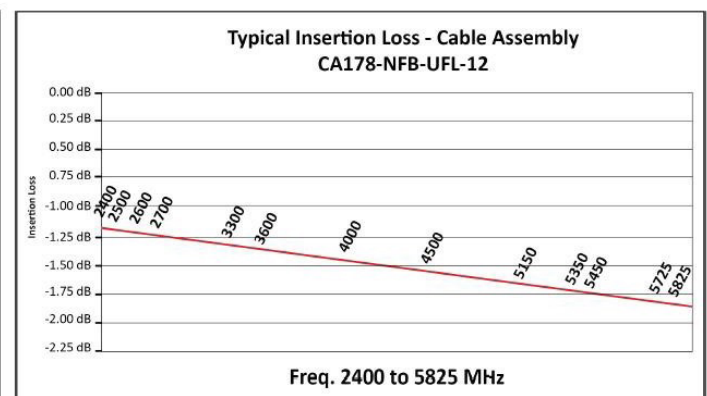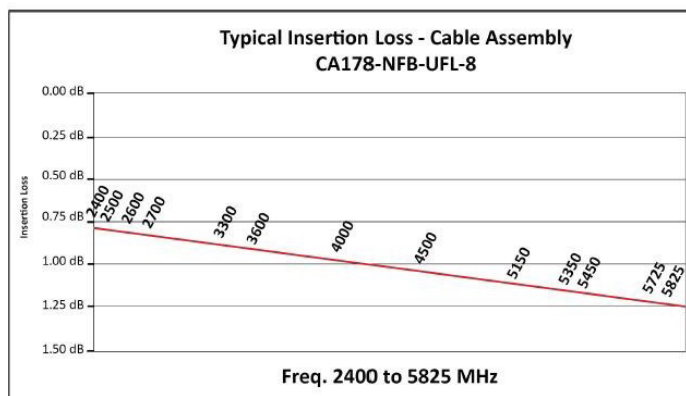

## ORDERING INFORMATION

PART NUMBER	DESCRIPTION
CA178-NFB-UFL-8	N-female bulkhead to U.FL, 8 inches
CA178-NFB-UFL-12	N-female bulkhead to U.FL, 12 inches
CA178-NM-UFL-8	N-male to U.FL, 8 inches
CA178-NM-UFL-12	N-male to U.FL, 12 inches

## ORDERING INFORMATION

PART NUMBER	CONNECTOR 1	CONNECTOR 2	CABLE LENGTH CM (INCHES)	CABLE TYPE	MAX INSETION LOSS (DB)
CA100-NFB-MC-12	N female bulkhead	MC-card	30.48 (12)	LMR100 (equivalent)	1.5
CA178-NFB-UFL-12	N female bulkhead	MMCX	30.48 (12)	LMR100 (equivalent)	1.5
CA178-NM-UFL-8	N female bulkhead	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA178-NM-UFL-12	N female bulkhead	Reverse polarity MMCX	30.48 (12)	LMR100 (equivalent)	1.5
CA100-NFB-RSMAM-12	N female bulkhead	Reverse polarity SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-NFB-RTNCM-12	N female bulkhead	Reverse polarity TNC male	30.48 (12)	LMR100 (equivalent)	1
CA100-NFB-SMAM-8	N female bulkhead	SMA male	20.32 (8)	LMR100 (equivalent)	0.8
CA100-NM-MC-12	N-male	MC-card	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-MMCX-12	N-male	MMCX	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-RASMAM-12	N-male	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-RSMAM-12	N-male	Reverse polarity SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-NM-RTNCM-12	N-male	Reverse polarity TNC male	30.48 (12)	LMR100 (equivalent)	1
CA100-RPSMAM-RAS-MAM-12	Reverse polarity SMA male	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-RPTNCF-NC-6	Reverse polarity TNC female bulkhead	No connector	15.24 (6)	LMR100 (equivalent)	0.5
CA100-RPTNCM-RAS-MAM-12	Reverse polarity TNC male	Right angle SMA male	30.48 (12)	LMR100 (equivalent)	1
CA100-TNCF-NC-6	TNC female bulkhead	No connector	15.24 (6)	LMR100 (equivalent)	0.5
CA178-NFB-UFL-12	N female bulkhead	U.FL	30.48 (12)	RG178 high freq.	2
CA178-NFB-UFL-8	N female bulkhead	U.FL	20.32 (8)	RG178 high freq.	1.5
CA178-NM-UFL-12	N male	U.FL	30.48 (12)	RG178 high freq.	2
CA178-NM-UFL-8	N male	U.FL	20.32 (8)	RG178 high freq.	1.5
CA178-RTNCB-MMCX-4	Reverse polarity TNC bulkhead (black)	MMCX	10.16 (4)	RG178 high freq.	0.8
CA178-RTNCB-MMCX-6	Reverse polarity TNC bulkhead (black)	MMCX	15.24 (6)	RG178 high freq.	1
CA178-RTNCB-UFL-6	Reverse polarity TNC bulkhead (black)	U.FL	15.24 (6)	RG178 high freq.	1
CA400-NM-NM-48	N male bulkhead	U.FL	121.92 (48)	LMR400 (equivalent)	0.8
CA58-NM-MCX-197	N-male	MCX	500.38 (197)	RG58/u (white)	5
CA58-SMA-MCX-96	Right angle SMA male	MCX	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-NF-96	Right angle SMA male	N female bulkhead	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-RSMA-96	Right angle SMA male	Reverse polarity SMA male	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-RTNC-96	Right angle SMA male	Reverse polarity TNC male	243.84 (96)	RG58/u (white)	2.5
CA58-SMA-SMAF-96	Right angle SMA male	SMA female bulkhead	243.84 (96)	RG58/u (white)	2.5

---

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original