

M7525 SERIES

DC/DC POWER SUPPLY



DESCRIPTION

The M7525 military power supply is a rugged DC to DC converter which accepts an 18 - 48VDC input voltage range and provides a single DC output from 3.3 to 50V at up to 800W. Custom outputs available upon request and the unit is Designed to meet military standards, MIL-STD-704, MIL-STD-1275, MIL-STD-810, MIL-STD-461.

FEATURES

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Remote sense compensation
- Remote inhibit (ON/OFF)
- Fixed switching freq. (250 kHz)
- External sync. capability
- EMI filters included
- Indefinite short circuit protection with auto-recovery
- Over-voltage clamp with auto-recovery
- Over temperature shutdown with auto-recovery

HOW TO ORDER

Part Number	Input	Output		Special Features
	Volatage Range	Voltage	Current	
CF-02EM7525100	18 to 48 VDC	5VDC	50A	
CF-02EM7525101	18 to 48 VDC	12VDC	50A	
CF-02EM7525102	18 to 48 VDC	15VDC	50A	
CF-02EM7525103	18 to 48 VDC	24VDC	33A	
CF-02EM7525104	18 to 48 VDC	28VDC	28A	
CF-02EM7525105	18 to 48 VDC	48VDC	16A	
CF-02EM7525106	18 to 48 VDC	28VDC	28A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$.
CF-02EM7525107	18 to 48 VDC	48VDC	16A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$.
CF-02EM7525108	18 to 48 VDC	24VDC	33A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$.
CF-02EM7525109	18 to 48 VDC	5VDC	50A	
CF-02EM7525110	18 to 48 VDC	12VDC	50A	
CF-02EM7525111	18 to 48 VDC	15VDC	50A	
CF-02EM7525112	18 to 48 VDC	24VDC	33A	
CF-02EM7525113	18 to 48 VDC	28VDC	28A	
CF-02EM7525115	18 to 48 VDC	48VDC	16A	
CF-02EM7525116	18 to 48 VDC	28VDC	28A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$.
CF-02EM7525117	18 to 48 VDC	48VDC	16A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$.
CF-02EM7525118	18 to 48 VDC	24VDC	33A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$.

Special Features for the M7525109 to 118

- M7525109 - 118: these variants are REACH Compliant
- M7525109 - 118: The aluminum parts comprising these converters are chromate conversion coated per MILDTL-5541F, Type II CLASS 1A or eq.
- M7525109 - 119: The shell of the connectors are Zinc:
 - Input connector - J1 Connector type: M24308/24-39Z or eq.
 - Output connector – J2 Connector type: M24308/23-39Z or eq

ELECTRICAL SPECIFICATIONS

DC Input: Voltage range: 18 to 48VDC Transient protection: No damage due to surges IAW MIL-STD-1275A (100V for 50ms) MIL-STD-704A (80V for 0.1s)	DC Output: Voltage range: 3.3V to 50VDC Current range: up to 50A Power range: 800W Peak power (short period up to 4 seconds): 1kW	Isolation: Input to Output: 200VDC Input to Case: 200VDC Output to Case: 100VDC
Output Voltage Regulation: Up to $\pm 1\%$ (no load to full load, -55°C to $+85^{\circ}\text{C}$ and over input voltage range).	Efficiency: Typical 87% (28VDC output, nominal input voltage, full load, room temperature)	EMC: Designed to meet* MILSTD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103.
Ripple and Noise: Less than 50mVp-p, typical (max. 1%) without external capacitance. When connected to system capacitance ripple drops significantly.	Transient Over- and Undershoot: Output resistance at load change of 50%-100% is 30-120m Ω (depending on output voltage). Output back to steady state within 500-800 μs .	Turn on Transient: No Voltage overshoot during power on.

PROTECTIONS

Input: Under Voltage Lock: Unit shuts down when input voltage falls below 16.5VDC $\pm 1\text{VDC}$	Output: Active Over-Voltage Protection: The converter will clamp the output if it exceeds $110\% \pm 5\%$ of the nominal voltage. The converter restarts after a preset period of time if output voltage decreases back to normal value.	General: Over Temperature Protection: The converter shuts down if baseplate temperature exceeds $+105^{\circ}\text{C} \pm 5^{\circ}\text{C}$. The converter automatically recovers when its baseplate temperature falls back below $+95^{\circ}\text{C} \pm 5^{\circ}\text{C}$.
Over Voltage Lock Out: Unit shuts down when input voltage rises above 52VDC $\pm 2\text{VDC}$	Passive Over-Voltage Protection: Load protected by a transorb rated $120\% \pm 10\%$ above nominal output voltage	
Input Reverse Polarity: Protection for unlimited time	Overload Protection (Hiccup): Continuous protection ($20\% \pm 10\%$ above maximum current) for unlimited time.	

ENVIRONMENTAL

Temperature: Operating: -55°C to +85°C (base plate) Storage: -55°C to +125°C	Altitude: Method 500.4 Procedure I & II, Up to 70,000 ft. operational	Salt Fog: Method 509-4
Humidity: Method 507.4 Procedure I Up to 95% RH	Vibration (random): Method 514.5 Category 4 - General minimum integrity exposure IAW Figure 514.5C-17 1 hour per axis.	Shock: Method 516.5 Procedure I 30g, 11ms terminal peak saw tooth.

PIN ASSIGNMENT

Input connector - J1

Connector type: M24308/24-39F or eq.
Mates with: M24308/2-3F or eq.

Pin No.	Function	P	Pin No.	Function	P	Pin No.	Function	P
1	INPUT	+	10	INPUT RTN	-	19	INPUT RTN	-
2	INPUT	+	11	CHASSIS		20	INPUT RTN	-
3	INPUT	+	12	INHIBIT	+	21	INPUT RTN	-
4	INPUT	+	13	SIGNAL RTN	-	22	INPUT RTN	-
5	INPUT	+	14	INPUT	+	23	INPUT RTN	-
6	N.C.		15	INPUT	+	24	N.C.	
7	INPUT RTN	-	16	INPUT	+	25	SYNC	+
8	INPUT RTN	-	17	INPUT	+			
9	INPUT RTN	-	18	N.C.				

Input connector - J2

Connector type: M24308/23-39F or eq.

Mates with: M24308/4-3F or eq.

Pin No.	Function	P	Pin No.	Function	P	Pin No.	Function	P
1	SENSE	+	10	OUTPUT RTN	-	19	N.C.	
2	OUTPUT	+	11	OUTPUT RTN	-	20	N.C.	
3	OUTPUT	+	12	OUTPUT RTN	-	21	OUTPUT RTN	-
4	OUTPUT	+	13	SENSE RTN	-	22	OUTPUT RTN	-
5	OUTPUT	+	14	OUTPUT	+	23	OUTPUT RTN	-
6	OUTPUT	+	15	OUTPUT	+	24	OUTPUT RTN	-
7	N.C.		16	OUTPUT	+	25	OUTPUT RTN	-
8	OUTPUT RTN	-	17	OUTPUT	+			
9	OUTPUT RTN	-	18	OUTPUT	+			

NOTE: All pins with identical function/designation should be connected together for best performance.

FUNCTIONS AND SIGNALS

INHIBIT

Description: Inhibits output.

Use: Apply short circuit or TTL "LOW" to turn off the power supply.

Leave open or apply TTL "HIGH" to turn on the power supply.

Referenced to: SIGNAL RTN

SYNC

Description: Synchronizes internal switching

frequency to system clock. Use: Apply TTL level,

250kHz $\pm$ 10kHz, 50% duty-cycle clock.

Leave open if unused. In this case, the switching frequency will be set by the internal clock (250 kHz)

Referenced to: SIGNAL RTN

SIGNAL RTN

Description: Signals return reference.

Referenced to: Connected by a 100 Ω resistor to INPUT RTN

SENSE

Description: Used to achieve accurate voltage regulation at load terminals, to compensate for voltage drop across the leads connecting the converter to the load, $0.25\text{ V} \pm 0.1\text{ V}$

Use: Connect SENSE line directly to the load's positive terminal, and SENSE RTN directly to the load's negative terminal.


If not used, connect SENSE to OUTPUT and SENSE RTN to OUTPUT RTN. Do not leave open!

POR (Protection Override) - Optional


Description: The POR signal disables the input under voltage lockout, input over voltage lockout, over temperature protection and peak load duration limiter.

Please consult factory for details.


TYPICAL CONNECTION

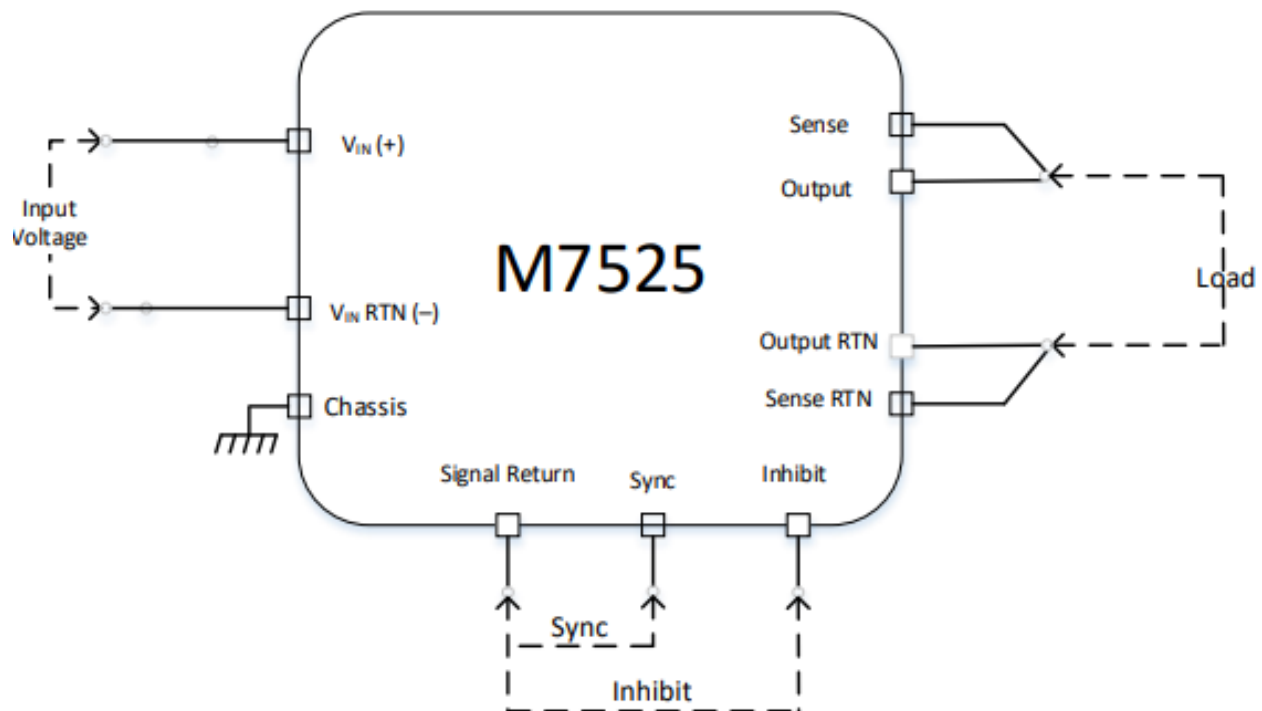


PARALLEL CONNECTION DIAGRAM

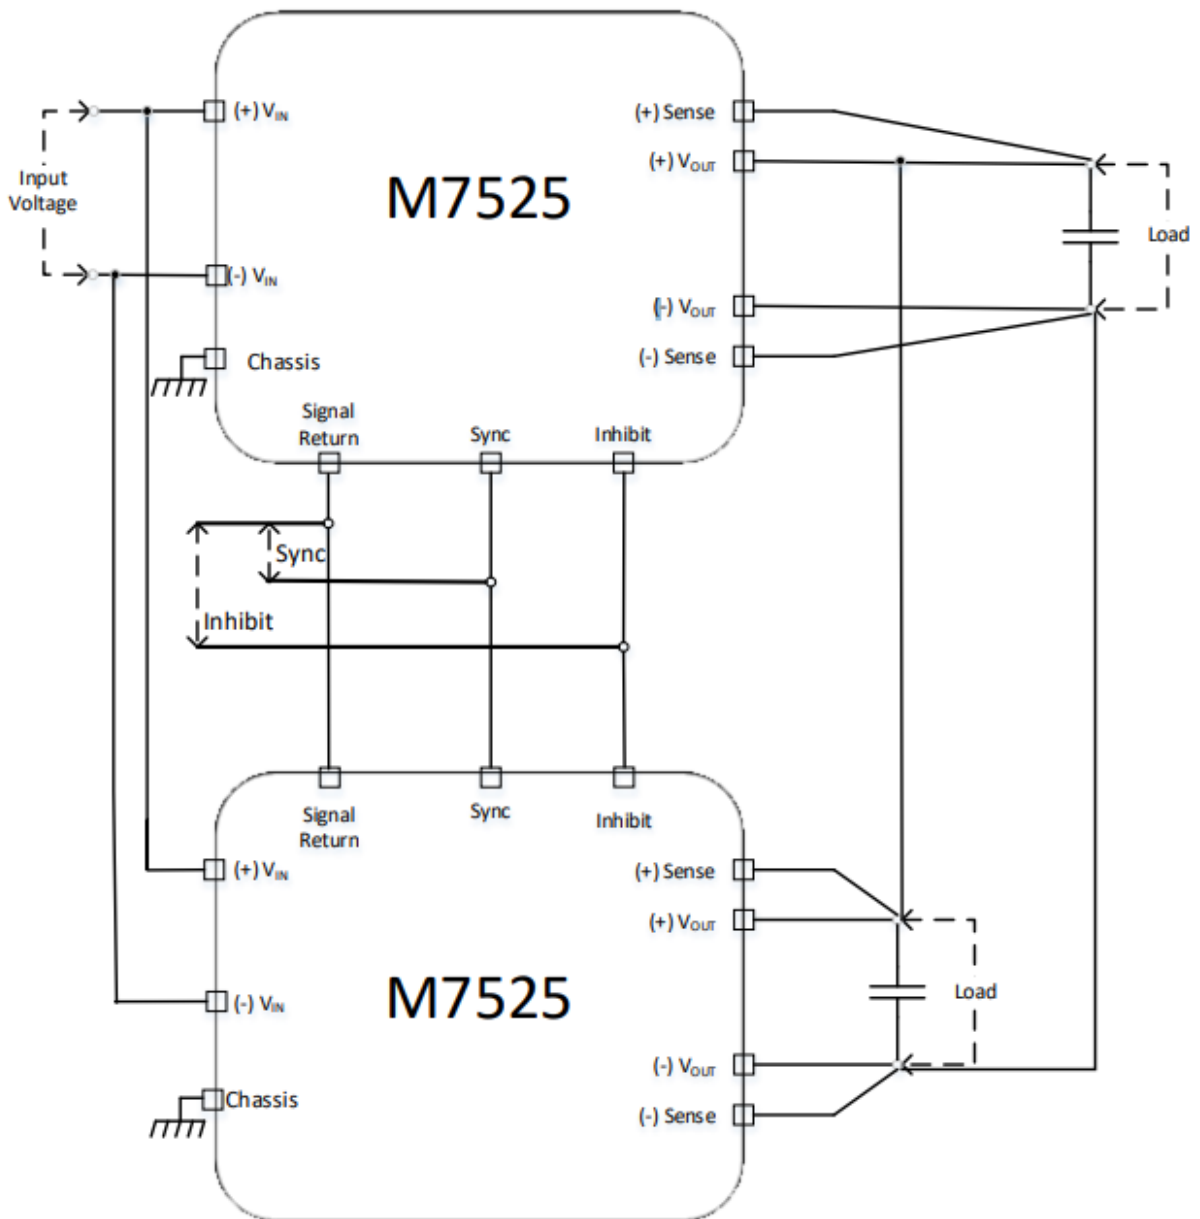

REDUNDANT CONNECTION DIAGRAM

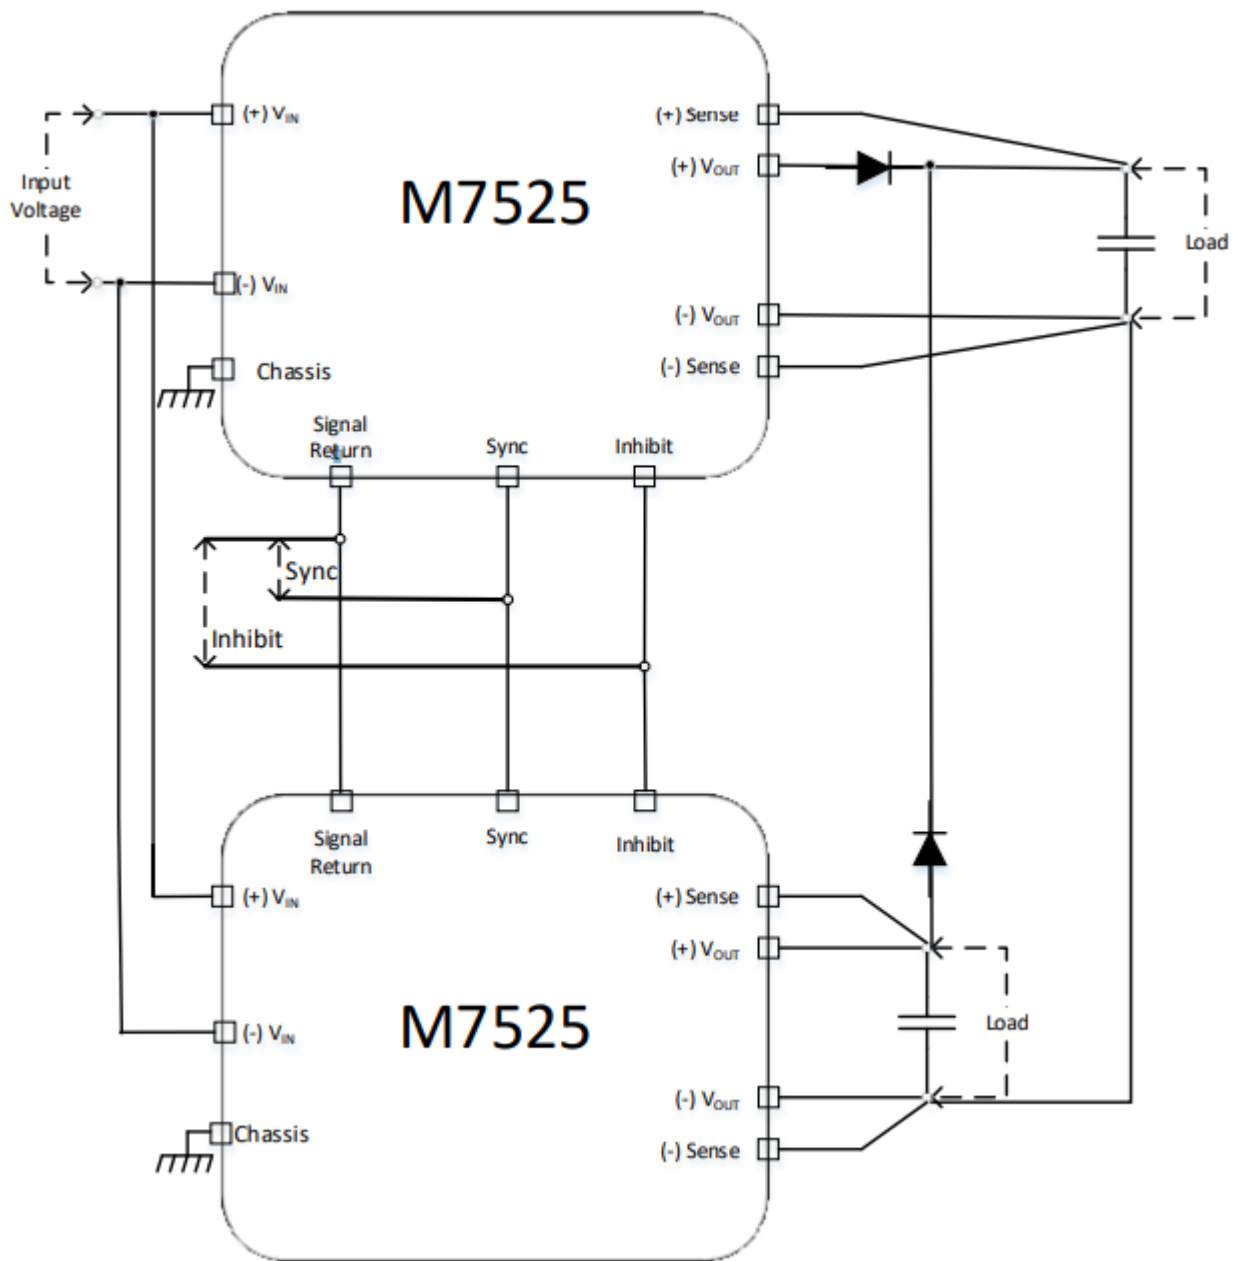

OUTLINE DRAWING

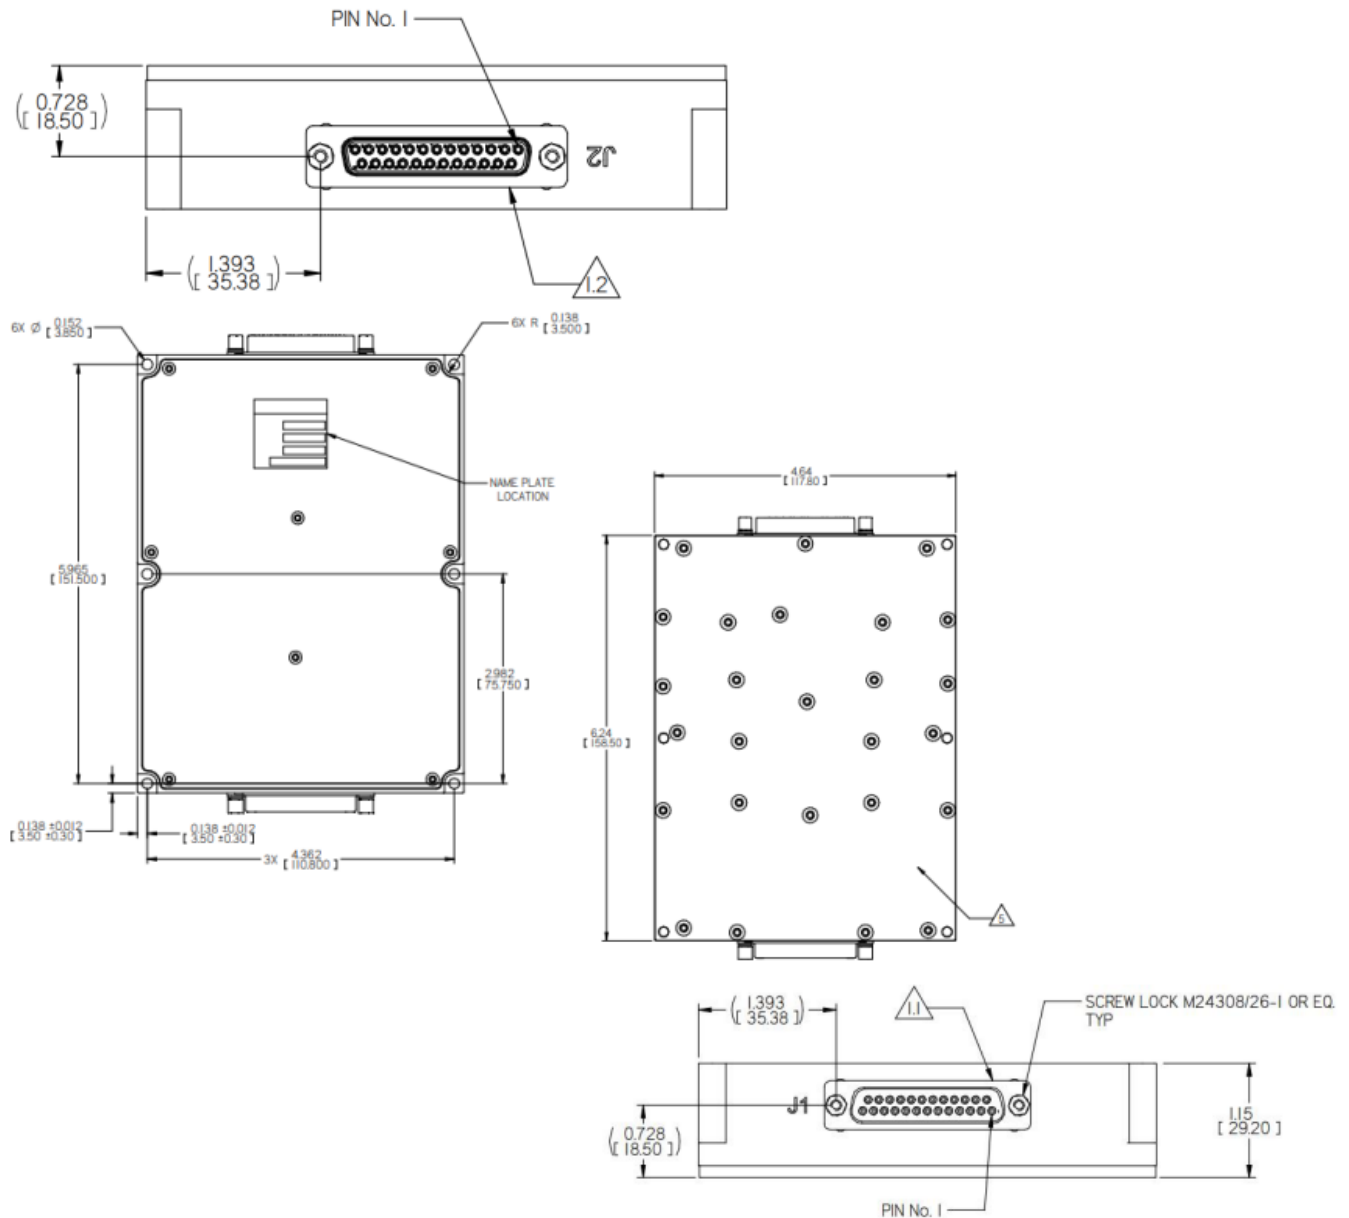

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

AMPHENOL is a registered trademark of Amphenol Corporation.
PRELIMINARY

©2023 Amphenol Corporation REV:

Amphenol

MILITARY HIGH SPEED

40-60 Delaware Avenue
Sidney, NY 13838
amphenol-aerospace.com | amphenolmao.com

John Tucci | +1 (607) 376-2778 | jtucci@amphenol-aao.com
amphenol-aerospace.com