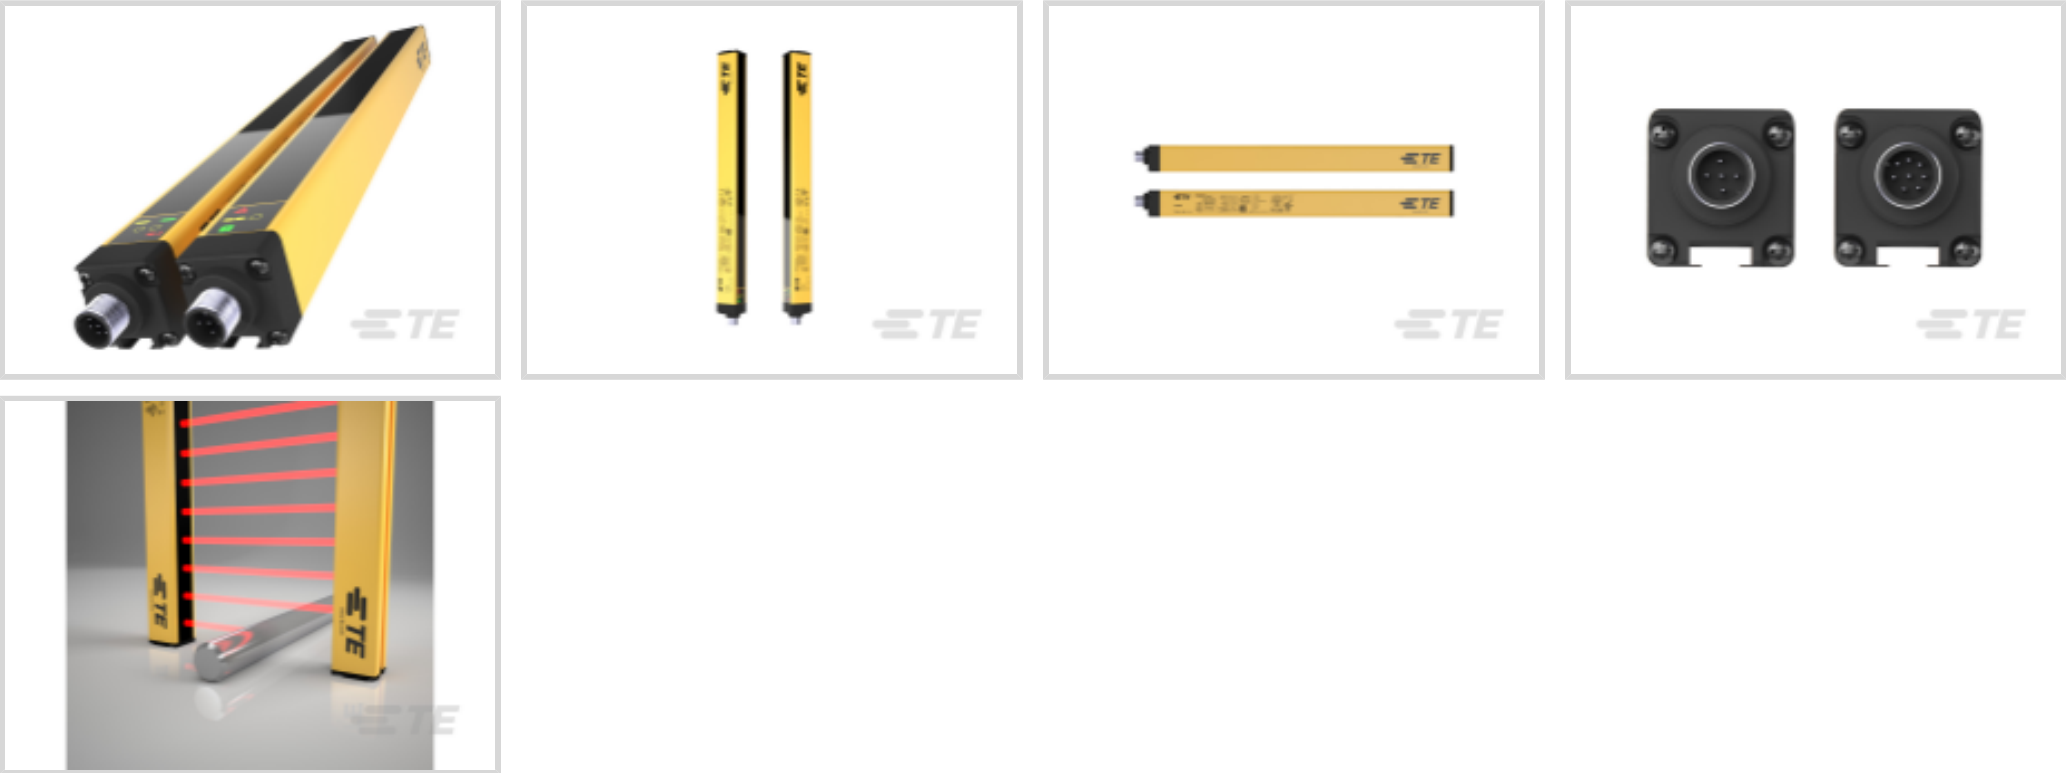




Sensors > Safety Light Curtains



Safety Level: **Type 4 - PL e - Cat.4 , SIL3, SILCL3**

Detection Type: **Access Control**

Response Time: **3.5 msec**

Features

Configuration Features

|                          |                                                                  |
|--------------------------|------------------------------------------------------------------|
| Number of Safety Outputs | 2                                                                |
| Connections Type         | M12 5-Pole Connector (Emitter) & M12 8-Pole Connector (Receiver) |
| Safety Output Type       | 2 OSSD Pairs (400mA)                                             |
| Safety Functions         | Integrated                                                       |

Electrical Characteristics

|                      |              |
|----------------------|--------------|
| Power Supply Voltage | 24 ± 20% VDC |
| Output Voltage       | 24 VDC       |
| Output Current (Max) | .4 A         |

Body Features

|                |        |
|----------------|--------|
| Product Weight | 1749 g |
|----------------|--------|

Dimensions

|                               |        |
|-------------------------------|--------|
| Connection Cable Length (Max) | 100 m  |
| Product Depth                 | 28 mm  |
| Product Length                | 30 mm  |
| Product Height                | 953 mm |
| Overall Height                | 953 mm |



Controlled Height810 mm

Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Operating Temperature Range | -20 – 55 °C[-4 – 131 °F]  |
| Storage Temperature Range   | -30 – 70 °C[-22 – 158 °F] |

Operation/Application

|                                |                    |
|--------------------------------|--------------------|
| Indicator Type                 | LED                |
| Number of Beams                | 3                  |
| Detection & Functioning System | Emitter & Receiver |
| Protected Height               | 810 mm             |
| Start & Restart Type           | Automatic & Manual |
| Detection Type                 | Access Control     |
| Response Time                  | 3.5 msec           |

Industry Standards

|              |                                      |
|--------------|--------------------------------------|
| IP Rating    | IP67                                 |
| Safety Level | Type 4 - PL e - Cat.4 , SIL3, SILCL3 |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Not Yet Reviewed                                                                                                               |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                               |
| Solder Process Capability                     | Not reviewed for solder process capability                                                                                     |

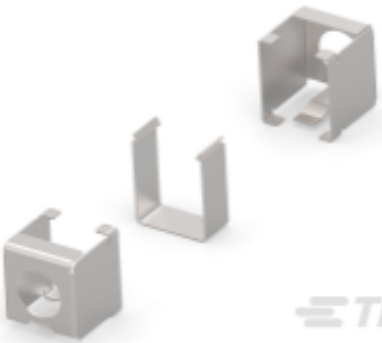
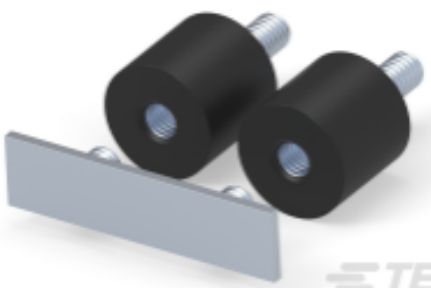
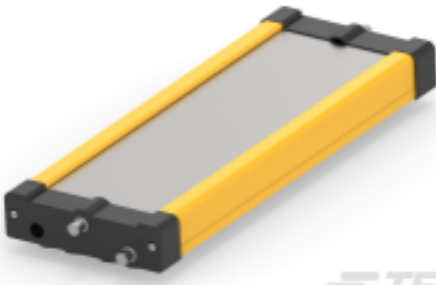
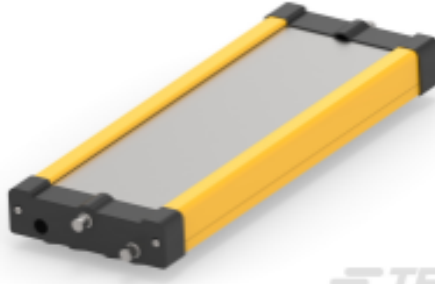
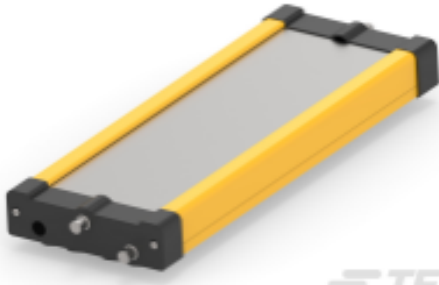
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

|                                                                                                                                   |                                                                                                                                    |                                                                                                                                       |                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 2447915-3<br/>SLC-FMC-167</p>     |  <p>TE Part # 2447916-2<br/>SLC-FMC3-DM-120</p>  |  <p>TE Part # 2447916-8<br/>SLC-FMC3-ADM-120</p>  |  <p>TE Part # 2447919-3<br/>SLC-TR30</p>        |
|  <p>TE Part # 2447920-1<br/>SLC-PS-F</p>       |  <p>TE Part # 2447922-2<br/>SLC-VD8</p>         |  <p>TE Part # 1-2447917-2<br/>SLC-SLC-MP-151</p> |  <p>TE Part # 2447919-4<br/>SLC-TR40</p>       |
|  <p>TE Part # 2447914-5<br/>SLC-BFAST4</p>     |  <p>TE Part # 2447915-6<br/>SLC-FMC-240</p>     |  <p>TE Part # 2447934-4<br/>SRK-2NO</p>          |  <p>TE Part # 2447917-6<br/>SLC-SLC-MP-076</p> |
|  <p>TE Part # 2447917-7<br/>SLC-SLC-MP-091</p> |  <p>TE Part # 2447912-5<br/>SLC-FC25-M12-5P</p> |  <p>TE Part # 2447916-3<br/>SLC-FMC4-DM-133</p>  |  <p>TE Part # 2447916-4<br/>SLC-FMC-DM-167</p> |



Documents

Product Drawings

SLC4-B3B-081L

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_2447906-8\_B2.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2447906-8\_B2.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2447906-8\_B2.3d\_stp.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Safety Light Curtains

English

Safety Products Training

English

Product Specifications

Manuals & User Guides

English

Manuals & User Guides

English

Agency Approvals

UL Report

English