

RFPC-MMCX03-F : MMCX Straight Jack, PCB Mount Type

Material and Plating:

Insulator: PTFE

Pin: Be Cu, Gold

Body: Brass, Gold

Specification:




Durability: 500 Mating Cycles Min.

Operating Temperature: -40°C~+125°C


Working Frequency Range: DC~6GHz

Impedance: 50 Ohm.

Packaging: Bulk in Tray

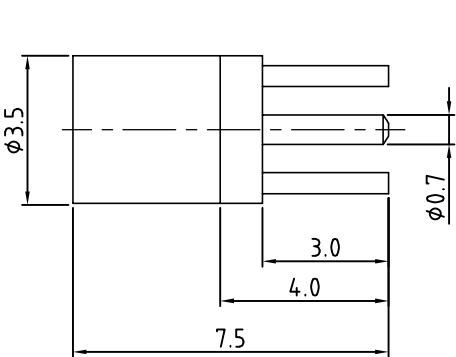

Recommended PCB Layout

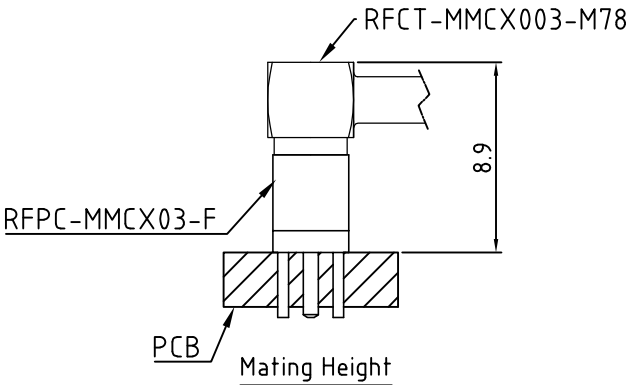

REV. DATE & DRN
11 24/02/20 - NYW RELEASE
12 24/02/20 - NYW ADD MATING HEIGHT DIAGRAM
13 24/02/20 - NYW ADD MATING HEIGHT TEMP.
14 09/05/25 - NYW ADD IMPEDANCE
15 09/05/25 - NYW ADD GCT LOGO

Scale: NTS	THIRD ANGLE	Unstated Tolerances:	Material
Drawn: NYW		.X ±0.2	SEE NOTE
App'd: XXX	Title JACK	.XX ±0.2	NOT TO SCALE
Date: 9 MAY '25	Revision: 1.4	.XXX ±0.2	Unit: mm
		ANGLES ±5	

www.gct.cowww.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: RFPC-MMCX03-F
RFPC-MMCX03-F
Drawing Number:
Sheet 1 of 1
Drawing © E and O E