





DATASHEET

ahSP1

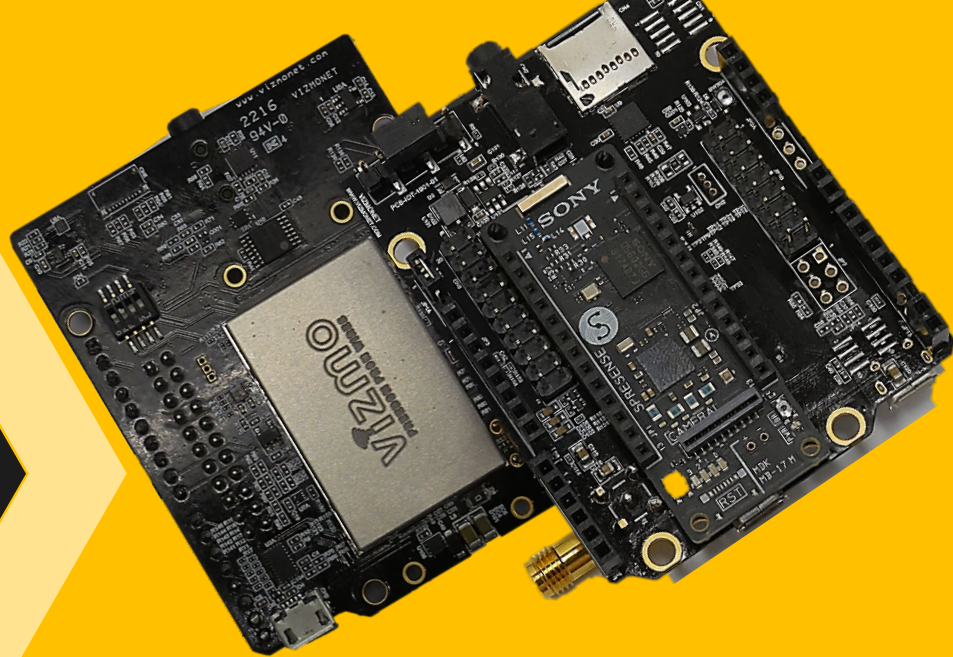

IEEE 802.11 ah

High-Performance,
World's first WiFi-
HaLow module
available for SONY
SPRESENCE



Sub GHz ISM Band

902 MHz to 928 MHz
operating Frequency in
license-free Band, 1/2/4
MHz Channel Bandwidths



Industrial grade

-40 deg C to +85 deg C
operation temperature



VIZMONET PTE LTD

21 Woodlands Close, #03-01, Primz Biz Hub, Singapore 737 854
+65 6255 0581 | enquiry@vizmonet.com | www.vizmonet.com

Last updated on Jun-19-24
HW REV# 02.00

TECHNICAL SPECIFICATION

RADIO MODULE – GENERAL INFO	
Chipset	NRC7292, Cortex-M0,32MHz (11aH) Cortex-M3, 48 MHz (Application), 11aH MAC/PHY
Memory	8Mb, Serial NOR Flash, 752 KB SRAM
Operating frequency	902 MHz to 928 MHz
300,600,900,1200,1800,2400,2700,300	BPSK(1/2),QPSK(1/2),QPSK(3/4),16QAM(1/2),16QAM(3/4),64QAM(2/3),64QAM(3/4),64QAM(5/6) (1MHz CH BW)
650,1300,1950,2600,3900,5200,5850,6500	BPSK(1/2),BPSK(3/4),QPSK(1/2),QPSK(3/4),16QAM(1/2),16QAM(3/4),64QAM(2/3),64QAM(3/4) (2MHz CH BW)
1350,2700,4050,5400,8100,10800,12150,13500	BPSK(1/2),QPSK(1/2),QPSK(3/4),16QAM(1/2),16QAM(3/4),64QAM(2/3),64QAM(3/4),64QAM(5/6) (4MHz CH BW)
Channel BW	1MHz/2 MHz/4 MHz
RoHS Compliance	Compliant
INTERFACE SPECIFICATIONS	
Operating Voltage	5V +/- 10% (Power feed through USB Micro B connector)
Interface	SPI (1.8V)
RF Antenna connector	x1 SMA
ENVIRONMENTAL SPECIFICATIONS	
Operating Temperature Range	-40 deg C to +85 deg C
PHYSICAL SPECIFICATIONS	
Mechanical Dimension	(L) 68.6 mm x (W) 53.3 mm
Weight	12G
REGULATORY INFORMATION	
Compliance	JAPAN, R020-230040
PACKAGING INFORMATION	
No of units	TBD

ORDERING INFORMATION

ahSP1

Extension Board for SONY SPRESENCE, SISO, IEEE 802.11 ah ,902 MHz, 25 dBm

RADIO SPECIFICATION

Frequency Channel Mapping, JAPAN

BW = 1 MHz

Channel number	Frequency (MHz)
40	921
42	923
43	924
44	925
45	926
46	927

BW = 2 MHz

Channel number	Frequency (MHz)
36	923.5
37	924.5
38	925.5
39	926.5

BW = 4 MHz

Channel number	Frequency (MHz)
47	924.5
48	925.5

TX Power and RX Sensitivity

Tolerance for TX Power and Sensitivity = +/- 1 dBm

Parameter	BW (MHz)	Spec (dBm) +/- 1 dBm
Transmit Power	1,2,4	13
RX Sens @ <10% PER, MCS10	1	-108
RX Sens @ <10% PER, MCS0	4	-101

Frequency Channel Mapping, USA, CANADA

Country: USA, Canada


Tolerance for TX Power and Sensitivity = +/- 1 dBm

BW = 1 MHz		BW = 2 MHz		BW = 4 MHz	
Channel number	Frequency (MHz)	Channel number	Frequency (MHz)	Channel number	Frequency (MHz)
30	902.5	150	903	TBD	904
31	903.5	151	905	TBD	908
32	904.5	152	907	TBD	912
33	905.5	153(Default)	909	TBD	916
34	906.5	154	911	TBD	920
35	907.5	155	913	TBD	924
36	908.5	156	915		
37	909.5	157	917		
38	910.5	158	919		
39	911.5	159	921		
40	912.5	160	923		
41	913.5	161	925		
42	914.5	162	927		
43	915.5				
44	916.5				
45	917.5				
46	918.5				
47	919.5				
48	920.5				
49	921.5				
50	922.5				
51	923.5				
52	924.5				
53	925.5				
54	926.5				
55	927.5				




TX Power & RX Sensitivity

Parameter	Data Rate	Spec (BW=1 MHz)	Spec (BW=2 MHz)	Spec (BW=4 MHz)
Tx Power (dBm)	MCS0	25	25	25
Tx Power (dBm)	MCS1	23	24	24
Tx Power (dBm)	MCS2	23	24	24
Tx Power (dBm)	MCS3	22	23	23
Tx Power (dBm)	MCS4	21	21	21
Tx Power (dBm)	MCS5	20	20	20
Tx Power (dBm)	MCS6	19	19	19
Tx Power (dBm)	MCS7	14	16	16
RX Sens (dBm)	MCS0	-108	-105	-102

PIN OUT

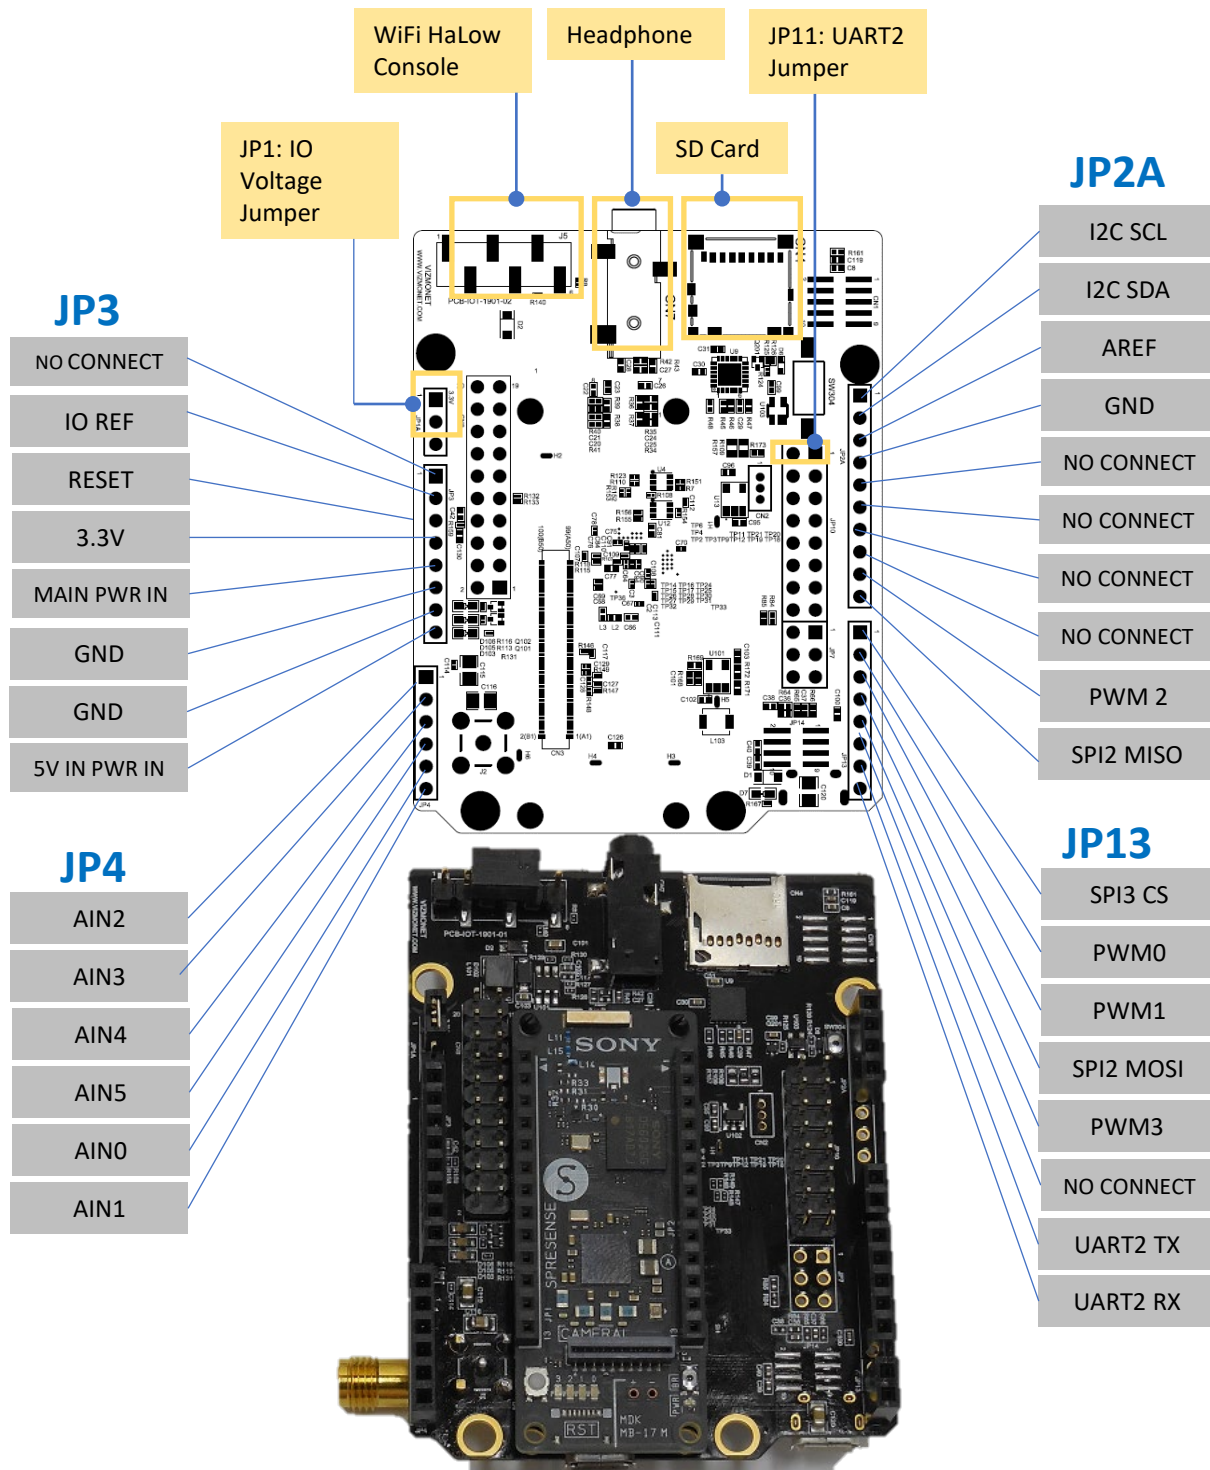

MECHANICAL DIMENSIONS

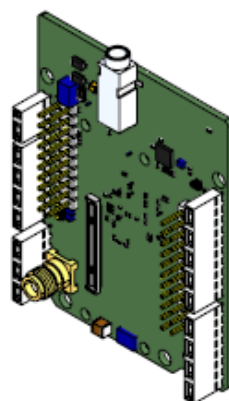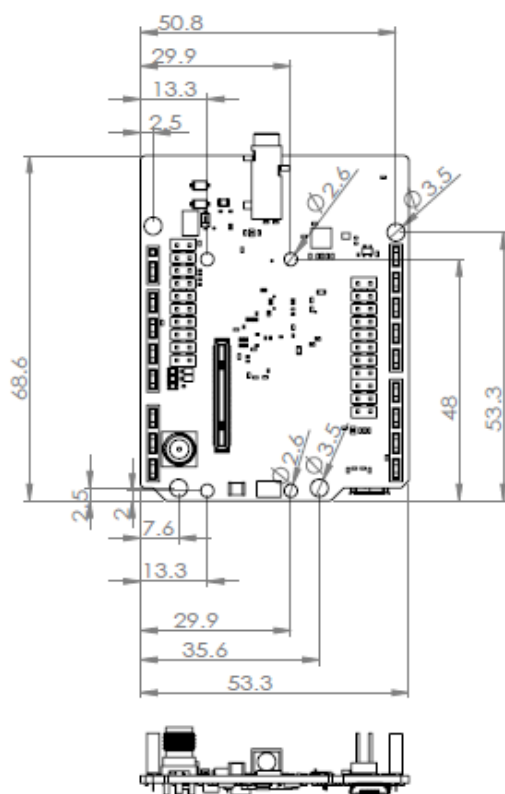

Trademarks

The information in this document is being provided in connection with Vizmonet products, which are subject to continuous developments and improvements. While every effort is made to ensure that the information contained in this document is correct and accurate at the time of this printing, Vizmonet makes no representations or warranties with respect to the accuracy of the information and is not liable for errors or mistakes that may arise. However, Vizmonet reserves the right to make changes to specifications and product descriptions at any time without notice. Vizmonet does not assume any responsibility for the use of the described product; neither does it convey any license under its patent rights, or the rights of others. Vizmonet products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life. Built-to-Customize™ is a trademark of Vizmonet. All other trademarks, registered trademarks and product names are the sole property of their respective owners.

HW REV# 02.00

Contact

Web: www.vizmonet.com
Email: enquiry@vizmonet.com

Headquarters

Vizmonet Pte Ltd
21, Woodlands Close
#03-01, Primz Biz Hub
Singapore 737 854