




Slide Switch-Standard


DOUBLE POLE/FOUR POSITION (with detent)



TYPE	ELECTRICAL RATING	LISTING
G-338-L	3.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*
G-338-S	3.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*
G-638-L	6.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*
G-638-S	6.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*
G-838-L	8.0 A DC at 12 V	
G-838-S	8.0 A DC at 12 V	
G-1138-L	11.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*
G-1138-S	11.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*
G-1338-L	13.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*
G-1338-S	13.0 A AC, 0.5 A DC at 125 V	U.L. & C.S.A.*

*If C.S.A. listing is required, specify assembled solder shield G-29-44.

G-338-S
Actual Size

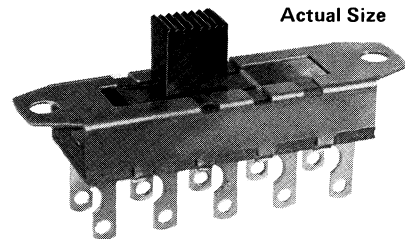

BUTTONS

HEIGHT "A"	PART NO. -S SWITCHES	PART NO. -L SWITCHES	REMARKS
.344" (8.74mm)	G-02-76A1	G-02-207A1	Standard
.188" (4.78mm)	G-02-76A5	G-02-207A5	Optional
.406" (10.31mm)	G-02-76A6	G-02-207A6	Optional
.500" (12.70mm)	G-02-76A2	G-02-207A2	Optional
.625" (15.88mm)	G-02-76A4	G-02-207A4	Optional
.750" (19.05mm)	G-02-76A3	G-02-207A3	Optional
.344" (8.74mm)	G-02-74-1	—	Optional
.188" (4.78mm)	G-02-74-5	—	Optional
.406" (10.31mm)	G-02-74-6	—	Optional
.500" (12.70mm)	G-02-74-2	—	Optional
.625" (15.88mm)	G-02-74-4	—	Optional
.750" (19.05mm)	G-02-74-3	—	Optional
.031" (.79mm)	G-02-153	—	Optional
.125" (3.18mm)	G-02-153-1	—	Optional
.220" (5.59mm)	G-02-153-2	—	Optional
.500" (12.70mm)	G-02-65	—	Optional

For drawing of buttons for -S switches, see page 42.

SOLDER SHIELD (G-29-44)

Vulcanized fiber shield .020" thick that fits over the switch terminals may be shipped assembled or separate, as you specify.


TOPPERS

Control panel styling and applications can be changed by adding an auxiliary "Topper" button, as described on page 19.

PUSH-PULL

You may find it more convenient to actuate from the front of the switch with the actuating button protruding through your panel.

DIMENSION "B"	PART NO.	REMARKS
.250" (6.35mm)	G-02-59-1	Optional
.500" (12.70mm)	G-02-59-2	Optional
.678" (17.22mm)	G-02-59-3	Optional
.875" (22.23mm)	G-02-59-5	Optional
1.593" (40.46mm)	G-02-59-4	Optional

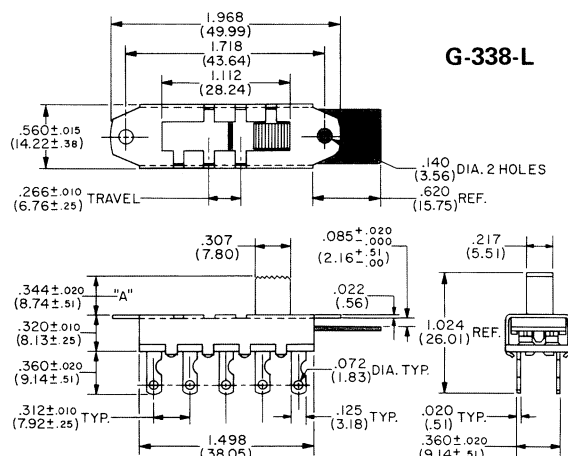


For description of -L and -S versions, see page 27.

MOUNTING

STANDARD • Two .140" diameter holes on 1.718" centers.

PRINTED CIRCUIT BOARD • Plug directly into board having suggested hole pattern shown.

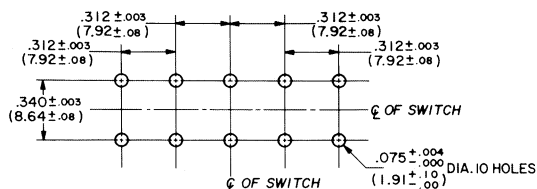

TERMINALS

Standard is solder terminal G-20-30 as shown. For PC applications, we suggest terminal G-20-13 and for wire wrap terminations, we recommend terminal G-20-23. You may select other terminals best suited for your application as shown in drawing T-4 on page 26.

