




TE Internal #: 2-966292-4
Ferrule, Orange, 11 AWG, 4 mm² Wire, 8234 CMA, 17 mm [.67 in]
Length, Closed Barrel, Tin Plating, Loose Piece, Discrete Wire,
Stranded Wire
[View on TE.com >](#)

Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules

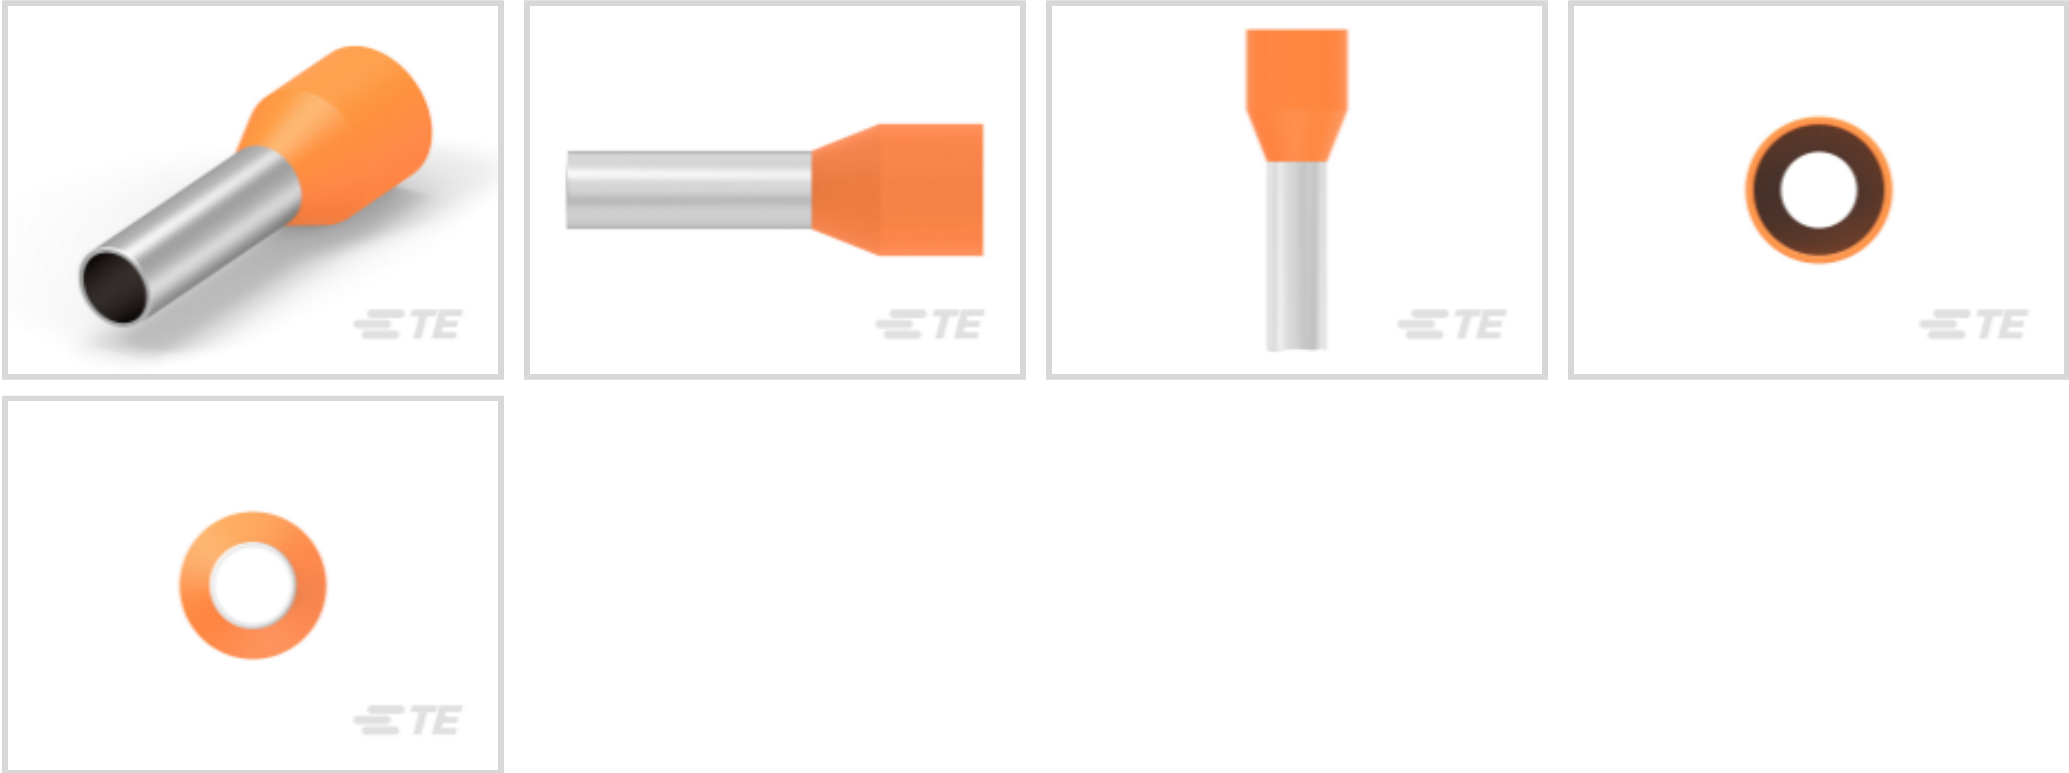

Crimp Wire Terminal Type: **Ferrule**
Compatible Insulation Diameter Range: 4.7 mm [.185 in]
Wire Size: **8234 CMA**

Features

Product Type Features

Sealable	No
Compatible With Discrete Wire Type	Stranded

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Primary Product Color	Orange
-----------------------	--------

Contact Features

Contact Mating Area Length	10 mm[.39 in]
Crimp Wire Terminal Type	Ferrule
Barrel Type	Closed
Terminal Plating Material	Tin
Terminal Orientation	Straight

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

--	--



Strip Length	11 mm[.433 in]
2-Wire Size	11 AWG
Compatible Insulation Diameter Range	4.7 mm[.185 in]
Wire Size	8234 CMA
Barrel Inside Diameter	4.8 mm[.19 in]
Terminal Material Thickness	.2 mm[.007 in]
Overall Product Length	17 mm[.67 in]

Usage Conditions

Insulation Option	Partially Insulated
-------------------	---------------------

Packaging Features

Packaging Quantity	500
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts



TE Part # 539660-1
ADERENDHUELSEN (Ferrule) Crimp Tool

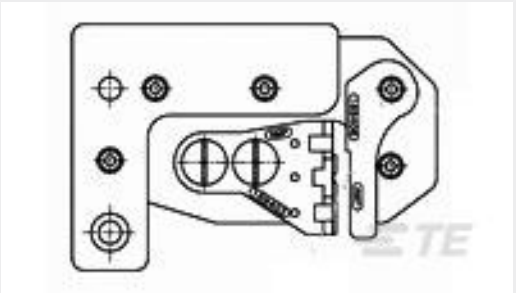

TE Part # 2-1579001-3
CSE10-AE22 CRIMP HEAD


Customers Also Bought




TE Part #K1160799
Emergency Stop Switch ES-2011-T412-018A




TE Part #282858-6
6P. TERMI-BLOK PCB MOUNT 90

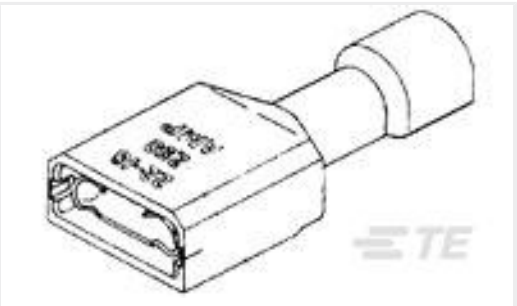

TE Part #3-520125-2
ULTRAFAST 187 ASSY REC 16-14 TPBR LP

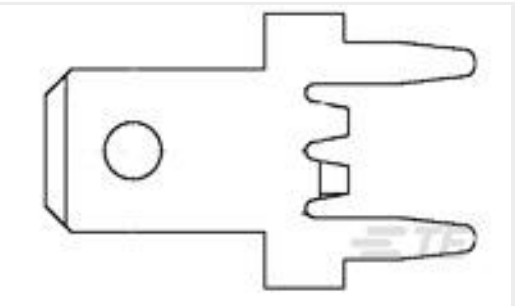

TE Part #1217133-1
187 FASTON,PCB TAB,TNBR

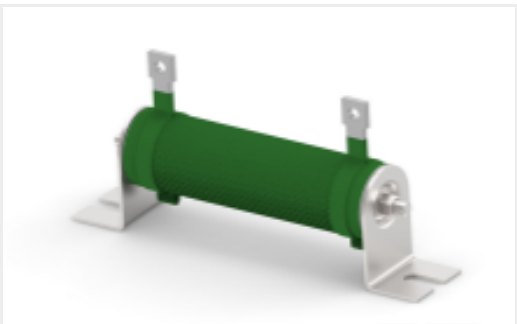

TE Part #CAT-C339-T2201
Wirewound Resistor: Mineral, 2.5 Kw



TE Part #2176071-6
3521 220K 1% 2W



TE Part #8-2176412-8
5W XSM M/OX 5% 22K

TE Part #M7139-350BG-200000
PRESS XDCR M7139-350BG-200000

Documents

Product Drawings
FER,WIRE,PL SLV,4.00/12,L10,ORANGE,LP
English

CAD Files
Customer View Model
ENG_CVM_CVM_2-966292-4_O.3d_igs.zip
English
Customer View Model
ENG_CVM_2-966292-4_A1.3d_igs.zip
English
Customer View Model
ENG_CVM_2-966292-4_A1.2d_dxf.zip
English

2-966292-4

Ferrule, Orange, 11 AWG, 4 mm² Wire, 8234 CMA, 17 mm [.67 in] Length, Closed Barrel, Tin Plating, Loose Piece, Discrete Wire, Stranded Wire



3D PDF

English

Customer View Model

ENG_CVM_2-966292-4_A1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Wire Ferrules

English

WIRE END FERRULES

English