


**Data Sheet | Item Number: 706-100/326-100**  
Connection cable; 26-pole; Pluggable connector per DIN 41651; open-ended;  
Length: 1 m; Conductor cross-section: 0.14 mm²  
<https://www.wago.com/706-100/326-100>



Similar to illustration

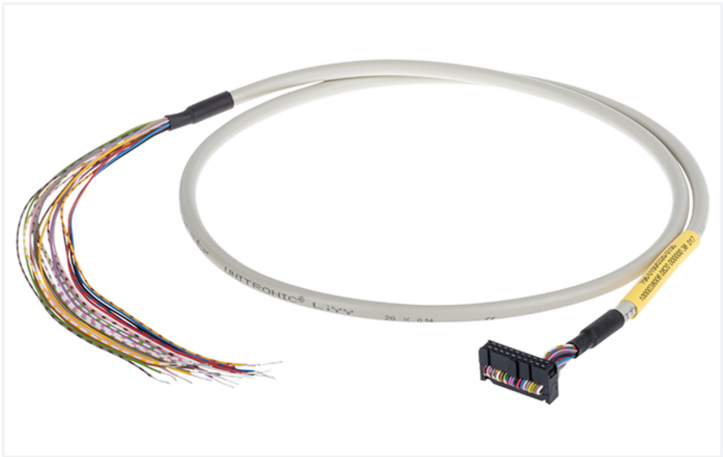

Similar to illustration

Color coding acc. to DIN VDE 47100		26 poles flat connector
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Yellow-Brown		16
White-Grey		17
Grey-Brown		18
White-Pink		19
Pink-Brown		20
White-Blue		21
Brown-Blue		22
White-Red		23
Brown-Red		24
White-Black		25
Brown-Black		26

Notes	
Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Electrical data	
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	1 A

Connection data			
Cable type	LiYY	Connection 1	
Color code	per DIN VDE 47100	Pluggable connector	Pluggable connector per DIN 41651; fe- male connector
		Pole number 1	26
		Connection type	System
		Wire cross-section	0.14 mm²



Connection 2	
Connector	open-ended
Connection type	open-ended

Physical data	
Cable length	1 m

Material data	
Fire load	0 MJ
Weight	111 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	FR
GTIN	4050821777724
Customs tariff number	85444290900

Product Classification	
UNSPSC	26121629
ETIM 9.0	EC001855
ETIM 8.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

## Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 706-100/326-100	