

ELTEK APPLIANCE



WATER BLOCK



100% MECHANICAL !!

WATER BLOCK



Standard



w/Limescale inhibitor



Reset Device

ABOUT THE WATER BLOCK

The WATER BLOCK is a 100% mechanical water shutoff device . It can detect water leaks based on the preset activation threshold and automatically turn off the water supply. Ten settings to choose from (1.3 to 13.2 gallons +/- 2.6 gallons). If threshold not met, device automatically resets itself. If device is triggered, manual reset is performed after investigation for leak.

Limescale inhibitor will reduce mineral build-up and extend service life.

No power necessary, so continues working in event of power loss.

PEACE - OF - MIND


APPLICATIONS



Washing machine



Steam dryer

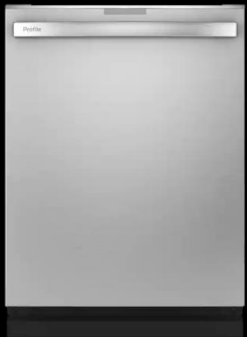

Dishwasher



Steam oven



Shower water management



Running toilet



Coffee brewer (plumbed)



Refrigerator



Home ice machine



Sink faucet / water filter



Bottle filling station



Commercial ice machine



Sprinkler head shutoff



*Hose bib / irrigation
(Up to 60 gallons)*



Beverage vending



Juice machines

APPLIANCE INSTALLATION



Washing machine
** HE WASHERS ONLY*



Steam dryer
** w/HE WASHER ONLY*



Dishwasher



Refrigerator



Steam oven



HOME INTERIOR INSTALLATION



Shower water management



Home ice machine



Sink faucet / water filter



Running toilet


HOME EXTERIOR INSTALLATION



Hose nozzle shutoff



Soaker hose shutoff

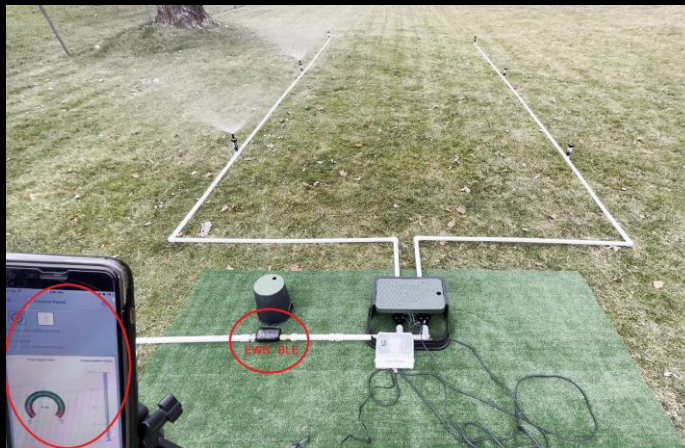

Sprinkler head shutoff



Up to 45 gallons - Hose bib



Up to 60 gallons - Hose bib



Up to 30 gallons - Hose bib

COMMERICAL BUILDING INSTALLATION



Beverage vending



Bottle filling station



Commercial ice machine



Juice machines



Coffee brewer (plumbed)



FEATURE / BENEFIT SUMMARY

FEATURE	BENEFIT
100% mechanical device	Cost savings. NO battery purchases necessary. NO power requirement. Continues working and provides protection in power outages
Universal 3/4" Garden Hose Thread (GHT) connection	No additional fittings required for washing machine and hose bib. DIY installation Quick and easy install Fitting selection available for applications needing 1/4", 3/8", and 1/2" connections
10 user-defined settings of 1.3 gallon each Maximum water shutoff volume of 13 gallons Parallel configuration 2x performance or 26 gallons	Individual selects best match to desired shutoff volume for application
Automatic shutoff if water event	Protects property from water damage by stopping flow of water
Automatic reset if setting not exceeded	No user intervention necessary
Device operation requirement of 0.50 gallons per minute	Stops major leaking which causes significant property damage
Optional reset device	Convenience tool to reset device after activation
Low price	Very affordable allowing multiple device purchases for whole house coverage
Water conservation, self-management	Save money on water utility bill by using device for water conservation purposes
NSF certified	Food grade regulatory compliant

KEY DESIGN FEATURE #1

100% MECHANICAL ARCHITECTURE


- *Always ON. No power required.*
- *Rated life time is > 79,000 gallons*

WATER BLOCK

DESIGNED, ENGINEERED IN ITALY. MANUFACTURED IN POLAND

IMPORTANT NOTE

1. Mechanical operation requires a minimum flow of 0.50 gallon per minute.
2. Water leak must be > 0.50 gallons per minute for device to activate.
3. Household plumbing has the potential to leak upwards of 7 gpm to 23 gpm (dependent on water pressure inside ½" pipe)

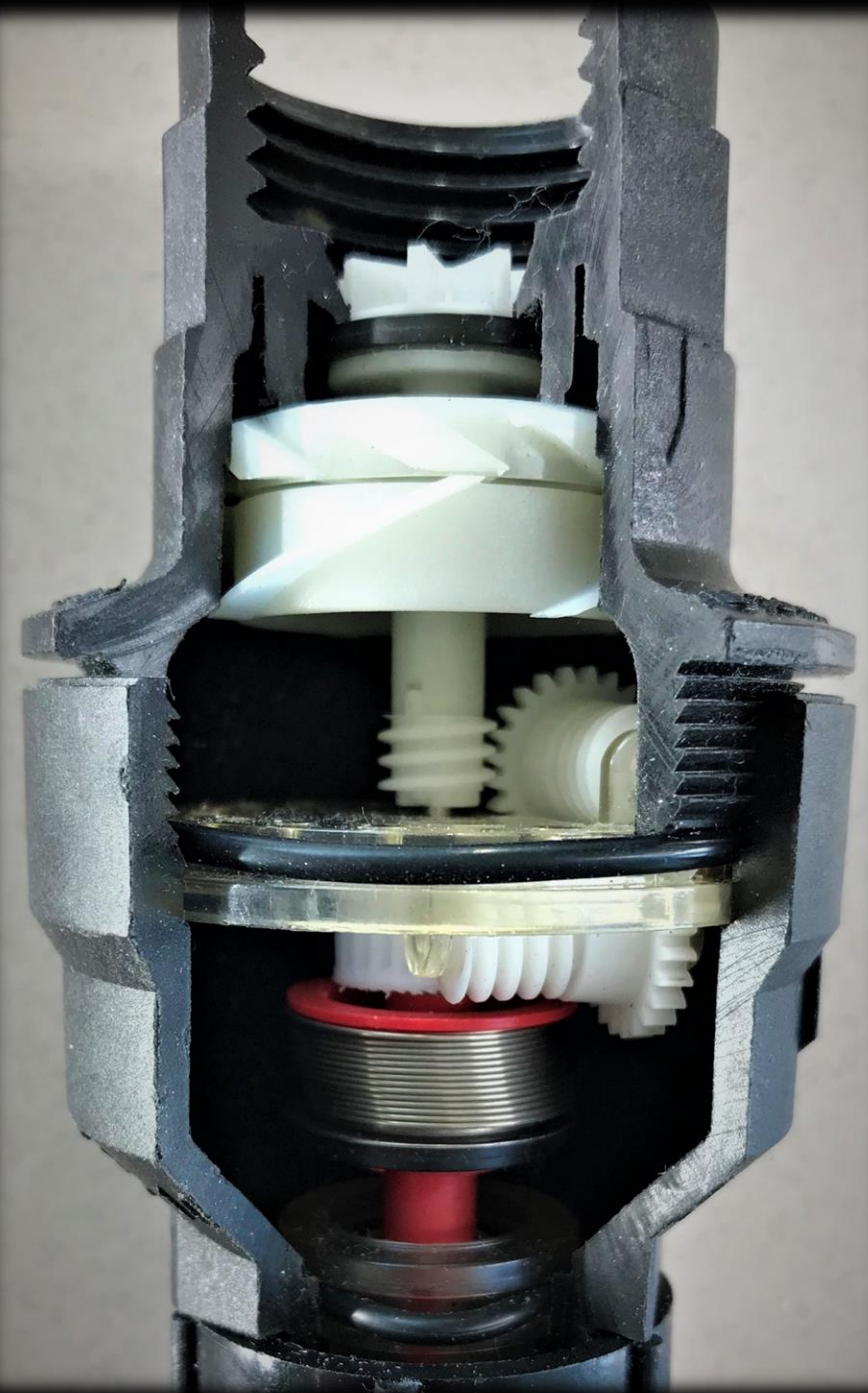

KEY DESIGN FEATURE #2

UNIVERSAL $\frac{3}{4}$ " GHT CONNECTIONS

- *Standard installation on washing machine and hose bib*
- *Wide range of fittings available for other applications*



MGHT



FGHT



Adapters added

KEY DESIGN FEATURE #3

10 USER-DEFINED SETTINGS

- Manually set device to appropriate water volume setting
- 10 selections of 1.3 gallons
- Each setting is a multiple of 1.3 gallons.
- 13 gallons maximum water volume for a single device
- Two devices in parallel is 26 gallons
- White key tab to move indicator dial



Key tab



10 settings on rim of outlet



Parallel arrangement for 26 gallons water volume



Parallel arrangement for 60 gallons water volume

Water volume is calculated at any variable flow rate from 0.53 to 7.9 gpm

KEY DESIGN FEATURE #4

USER RESETTABLE

- Upon device activation, red pin will extend upward
- Manual reset by disconnecting device outlet side and finger press red pin downward
- Convenience tool reset by depressing lever, no disassembly required



Normal state, red pin



Activation state, red pin extended



Convenience tool, reset device



OFFICE WATER



Flood Protection


ELTEK® WATER BLOCK

- Overflow safety device for coffee brewers, coolers, chillers, heaters, vending machines, ice machines and more
- Automatically shuts off if preset volume is exceeded
- Automatically resets if water volume preset is not exceeded
- Ten-position dial sets maximum flow volume
- No external energy source required
- Not recommended for reverse osmosis (RO) or ice flaker installation as an RO system by nature can produce permeate water for long periods of time which will unnecessarily trip the Water Block



PART NO		DESCRIPTION	PACK QTY	LIST PRICE EA	
NEW!	A	EV950300	Water Block	200	\$27.21
	A	EV950305	Water Block	25	27.92
NEW!	B	EV950320	Water Block Reset Device	200	15.46
	B	EV950325	Water Block Reset Device	25	15.83
		EV313861	Adaptor, 3/4" Male Garden Hose, Both ends, Black	1	0.92
	C	EV311840	Wall Mount Clip, Black	1	1.50

MAJOR OEM'S STRATEGY

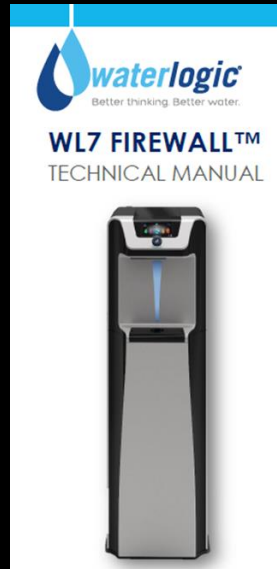

Genuine Original Whirlpool Water Block 10004100 pack Wpro

Trade Stock Code: 105-WP-45041 **PRIVATE LABEL**

Specification

- **Classification:** Original
- **For Brand:** Whirlpool Group: Whirlpool, Bauknecht, Ikea, Amana, Kitchen Aid
- **Product Type:** Special Order Lines
- **Appliance Type:**

How to Buy this Product

Paxanpax believes it should be easy for you to solve your day-to-day problems with your household appliance. We believe repairing should always be the first choice when an appliance breaks down.

Our products are not available to buy directly from Paxanpax and are only available through our trusted business reseller partners.

Please contact your preferred online or high-street retailer of spare parts or accessories, or your local service engineer and request this part number: **105-WP-45041**



Europe & Eurasia

Italy
Culligan Italiana S.p.A.
Via Gandolfi, 6 - 40057 Cadriano di Granarolo
nell'Emilia Bologna Italy
Phone: (+39-051) 601-7111
Fax: (+39-051) 601-7215
E-mail: culligan@culligan.it
Website: www.culligan.it

France
France - Domestic & Bottle Water Culligan
France
2, rue René Caudron 78960 Viroflay le Bretonneux
France
Phone: (+33) (0)1 30 16 23 23
Fax: (+33) (0)1 30 16 23 56
Website: www.culligan.fr

France - Commercial & Industrial Culligan Life
2, rue René Caudron 45, rue Fernand de Lesseps
59130 LAMBERSART France
Phone: (+33) (0)3 20 00 19 42
Fax: (+33) (0)3 20 02 91 10
E-mail: industrie@culligan.fr

Belgium
Culligan NV
Paul Gilsonlaan 45-49 1601 Rustbroek Belgium
Phone: (32) 2 331 27 62
Fax: (32) 2 331 27 64
E-mail: info@culligan.be
Website: www.culligan.be

Spain
Culligan NV
Culligan España, S.A. Calle Trepadella, 12, 08755
Castellblanch Barcelona Spain
Phone: (34-93) 565-3300
Fax: (34-93) 565-3309
E-mail: culligan@culligan.es
Website: www.culligan.es

Germany
Culligan Deutschland GmbH
Spierbergweg 15 41468 Neuss
Phone: +49 (0)2131 51230
Fax: +49 (0)2131 5123-410
E-mail: info@culligan.de
Website: www.culligan.de


Austria
Triple A Aqua Service GmbH
Brunner Straße 77 - 79120 Wien
Phone: +43 (0)800 800 735
Fax: 01 60 72 701
E-mail: konsult@aqualipina.at
Website: www.aqualipina.at

Portugal
Culligan Portugal
Avenida Pedro Álvares Cabral, Business Center
Serra Estoril Fraction VJ Linho, Estr. de Albarroque
- Linho 9, 2710-297 Sintra
Phone: (+351) 21 911 9900
E-mail: culligan@culligan.pt
Website: www.culligan.pt

Poland
Green Clean sp. z o.o.
ul. Św. Jacka Odrowoza 11 03-310 Warszawa
Phone: +48 51 193 410
E-mail: sales@greenm.pl
Website: www.culliganwater.pl

For information on all of our local sales and service offices in other European & Eurasian countries please contact:


EMEA Export Department
Culligan Italiana S.p.A.
Via Gandolfi, 640057 Cadriano Di Granarolo
nell'Emilia Bologna, Italy
Phone: (+39-051) 601-7111
Fax: (+39-051) 601-7215
E-mail: exportsales@culligan.it

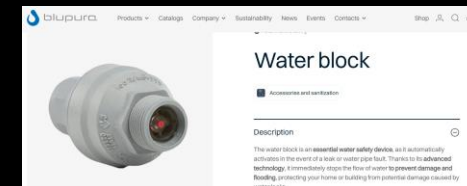


E-WATERBLOCK: TOILET SMART DEVICE

SAVE MONEY ON STOPPING SILENT LEAKS & PROTECT PROPERTY AGAINST WATER DAMAGE

- ❑ Stops flapper and overflow tube “silent leaks” occurring inside the toilet tank.
- ❑ Choice of automatic shutoff of water supply or remote shutoff capable.
- ❑ Phone or email event notification of leak.
- ❑ Automatic shutoff of water supply if leak detected exterior to toilet tank: toilet supply hose, broken coupling nut, cracked tank, etc. Protects against property damage.
- ❑ Detects leaks (drips) as low as 3 oz/min.
- ❑ Dashboard of toilet use activity. Overcrowding of apartment; too many tenants in same rental space exceeding terms of contract.
- ❑ Medical well-check on elderly if toilet use pattern broken.
- ❑ DIY Installation

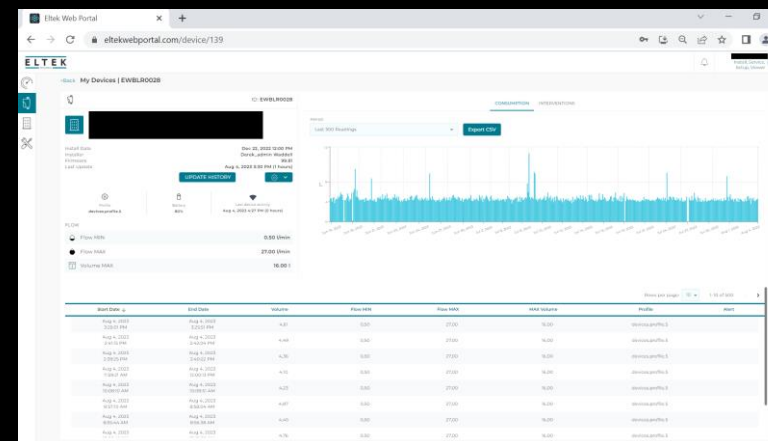

Normal toilet flush pattern

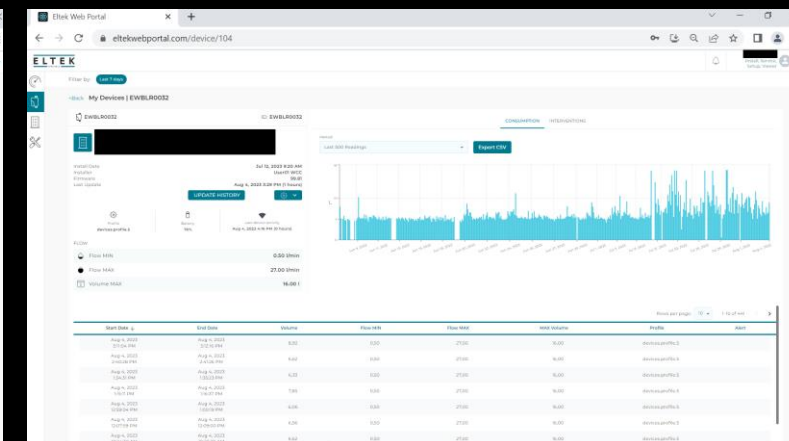

Toilet flapper leak development pattern

ELTEK GROUP

- HQ IN CASALE MONFERRATO, ITALY
- FOUNDED IN 1979
- > 1100 EMPLOYEES
- 7 MANUFACTURING PLANTS WORLDWIDE
- \$250M ANNUAL REVENUE
- SELL TO ALL TOP OEM APPLIANCE MANUFACTURERS IN WORLD
- IF YOU OWN A DISHWASHER MOST LIKELY YOU'LL FIND AN ELTEK DETERGENT DISPENSER INSIDE THE FRONT DOOR PANEL
- COMPANY MANUFACTURES WATER VALVES, PRESSURE SENSORS, AND LEAK PROTECTION SOLUTIONS
- OTHER BUSINESS UNITS INCLUDE AUTOMOTIVE AND MEDICAL