


15 WKLS 40

## Jack connectors



Jack plug acc. to JIS C 6560 JC35P3, 3.5 mm, 3 poles/  
stereo, angular version, with solder terminals

# 15 WKLS 40

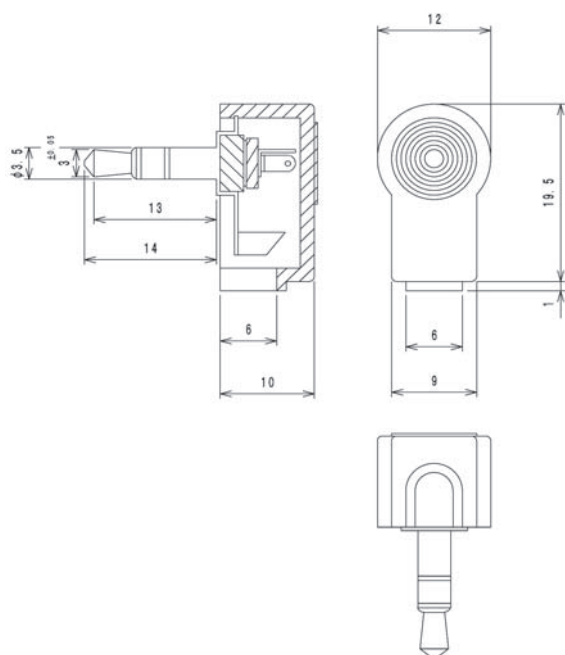

## Environmental conditions

Temperature range -20 °C/+70 °C

## Materials

Insulating body PC  
Contact CuZn/steel, nickel-plated  
Insulation ebonite  
Housing PE

## Connectable conductors for solder area

Cable diameter 4 mm

## Electrical data (at T<sub>amb</sub> 20 °C)

Rated current 1 A  
Rated voltage 34 V AC/DC  
Rated impulse voltage 500 V/60 s  
Insulation resistance  $\geq 100 \text{ M}\Omega$

## Associated products

### Counterparts

☞ 1502 01	☞ 1502 06	☞ 1502 07
☞ 1502 08	☞ 1503 02	☞ 1503 03
☞ 1503 08	☞ 1503 09	☞ 1503 17
☞ 1503 18	☞ 1503 27	☞ 1503 29
☞ 1503 30	☞ 1520 01	☞ 1520 02
☞ 4510	☞ 4511	☞ KLB 4
☞ KLBR 4		

15

WKLS 40

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
WKLS 40	3	100	500

**Packaging:**

in bulk, in a cardboard box or a plastic bag