


Similar to illustration

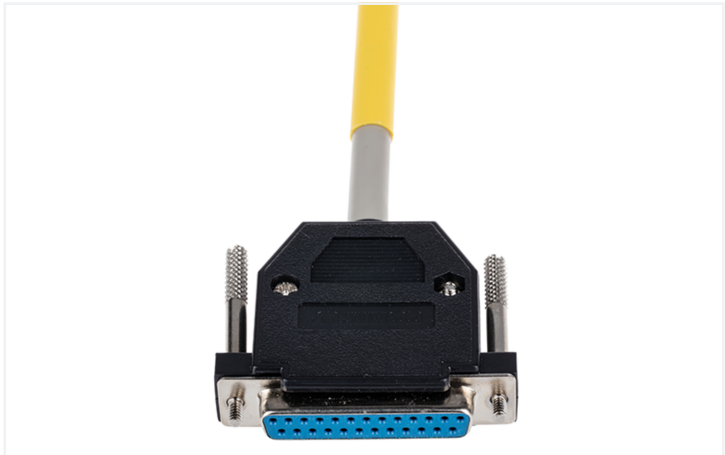

Similar to illustration

Color coding acc. to DIN VDE 47100		9 poles female Sub-D connector
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Shield		Connected to Sub-D

Notes	
Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data	
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Connection data	
Cable type	LiYCY
Color code	per DIN VDE 47100
Connection 1	
Pluggable connector	D-subminiature female connector
Pole number 1	9
Connection type 1	System
Wire cross-section	0.25 mm²



Connection 2	
Connector 2	open-ended
Connection type	open-ended

Physical data	
Cable length	2 m

Material data	
Fire load	0 MJ
Weight	1.1 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data		
ETIM 9.0		EC001855
ETIM 8.0		EC001855
PU (SPU)		1 pcs
Packaging type		Bag
Country of origin		FR
GTIN		4055143491105
Customs tariff number		85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 706-100/609-200	