


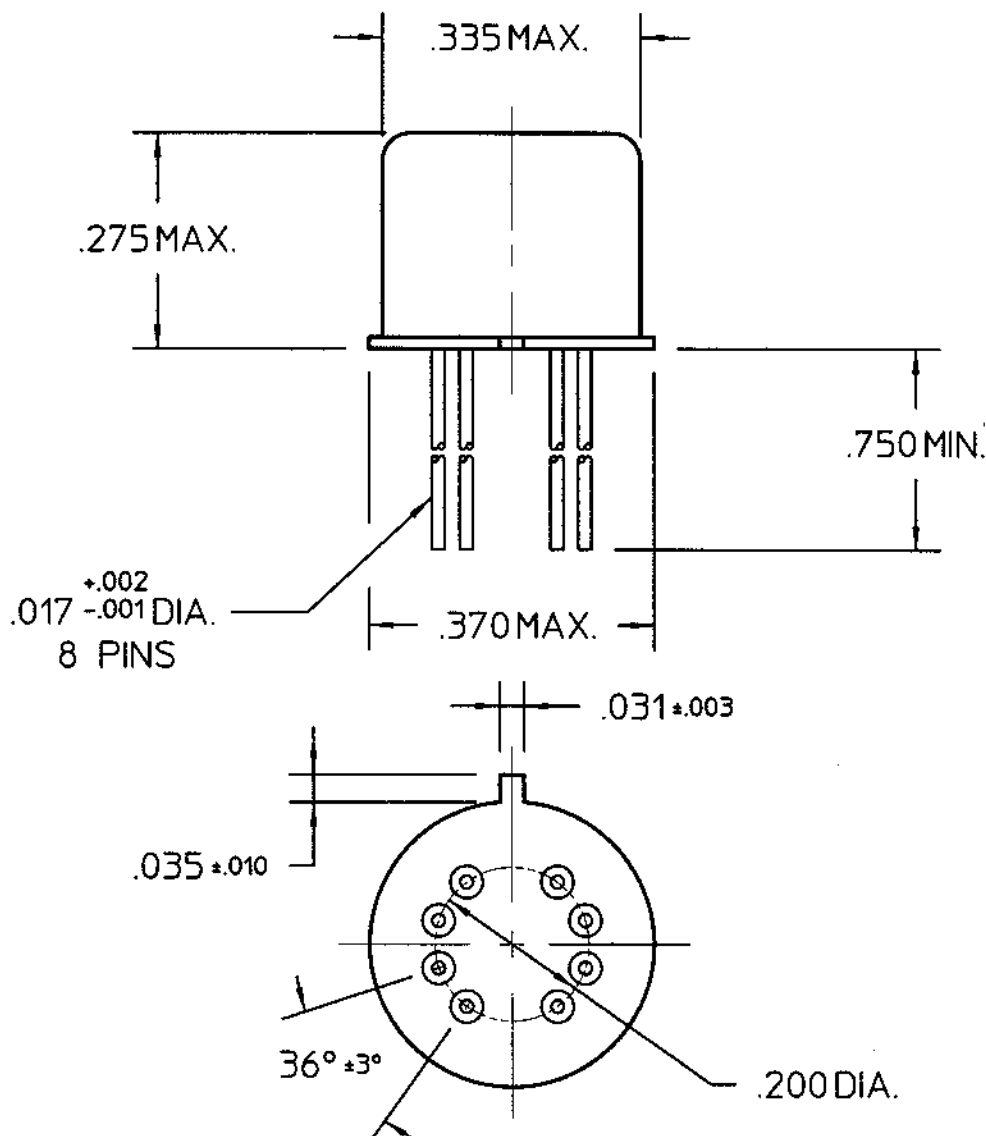

REV. 1

DCO 142816

COIL: @ 25°C
 RESISTANCE _____ 50 OHMS $\pm$ 20%
 NOMINAL VOLTAGE _____ 5.0 VDC
 MUST OPERATE _____ 3.6 VDC


 MUST RELEASE _____

ENVIRONMENT:

VIBRATION _____ 10 CPS TO _____ 500 CPS @ _____ 10 g's
 SHOCK _____ 30 g's _____ 6 MS. DURATION
 TEMPERATURE _____ -55 °C TO _____ +85 °C

NOTES: OPERATE TIME 4.0 MS MAX
 RELEASE TIME 3.0 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 01/26/01

CK. 3/14/01

CII Technologies
 advanced control electronic solutions

CUST. _____ CII STD

CUST. NO. _____ REV. _____

'MW3'
 3GHz

RELAY

MW3-5A