



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1980 – 3260 CMA**

Mating Tab Width: **6.35 mm [.25 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Voltage Rating	300 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Compression Crimp
Barrel Type	Closed

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------



Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	21.6 mm[.85 in]
Compatible Insulation Diameter Range	3.3 mm[.13 in]
Wire Size	1980 – 3260 CMA

Usage Conditions

Insulation Option	Fully Insulated
-------------------	-----------------

Packaging Features

Packaging Quantity	100
Packaging Method	Bag

Other

Barrel Color	Red
--------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

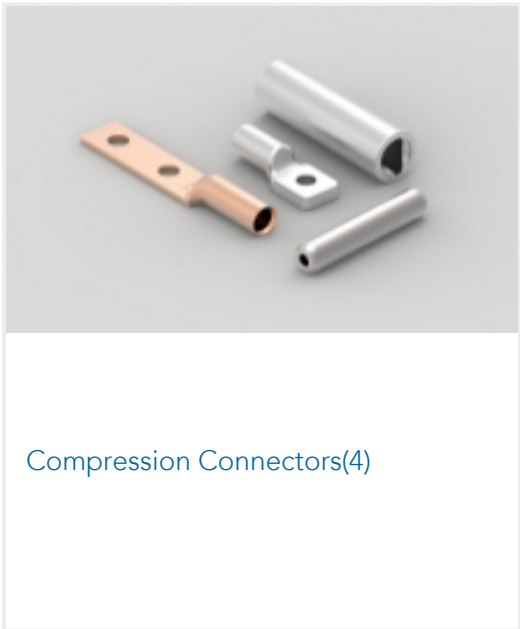
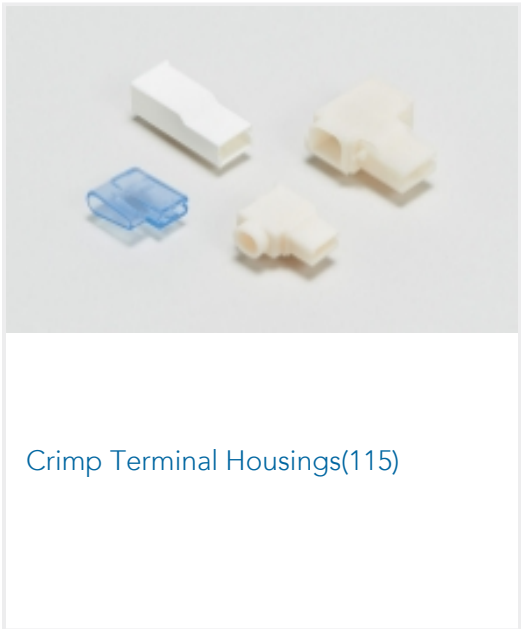
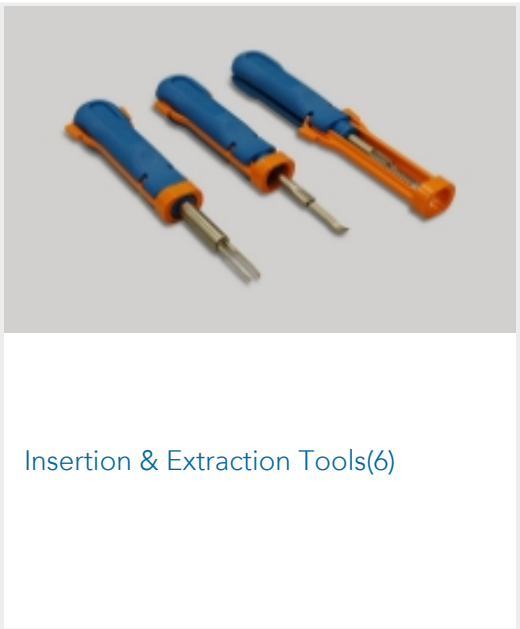
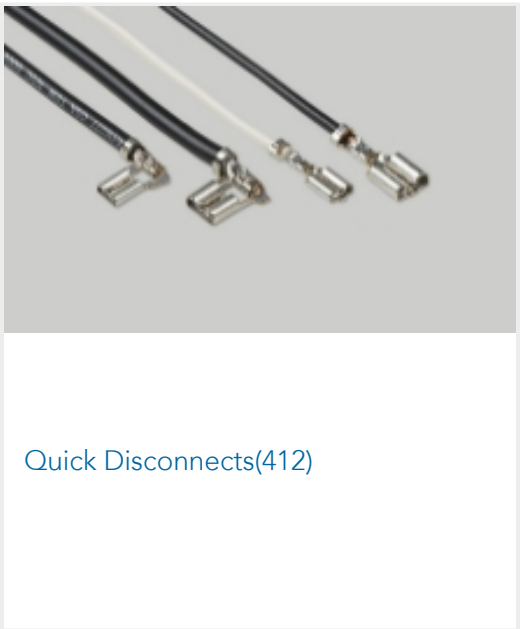


as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 47386-4 DAHT PG PIDG 26-16 ASSY	 TE Part # 47386 DAHT PG PIDG 26-16 ASSY	 TE Part # 169400 CERTI-LOK FRAME W/O DIES	 TE Part # 539691-2 ERGO DIE R.B.Y
 TE Part # 169404 CERTI-LOK DIE	 TE Part # 2063030-1 SDE DIESET, RBY, UL		

Also in the Series | FASTON 250

 Compression Connectors(4)	 Crimp Terminal Housings(115)	 Insertion & Extraction Tools(6)	 Insulation Boots & Sleeves(16)
 Magnet Wire Terminals(1)	 PCB Terminals(133)	 Quick Disconnects(412)	 Splices(4)

Customers Also Bought



TE Part #4169106001
DSPL-NR3-X-65MM



TE Part #CSI-RGFE-300-UFFR
RP-SMA to U.FL/MHF1 300mm 1.13 OD



TE Part #HD36-24-21SE-072
PLG, 21P, AL, E, THD ADPT DRAIN, 12 /16,S



TE Part #E38778-000
B-155-3803



TE Part #32057
TERMINAL,PIDG SPD 16-14 10



TE Part #160294
PLASTI-GRIP, RING, 12-10 6MM




TE Part #350735-4
12P UMNL PLUG HSG UL94VO



TE Part #710036-3
XCT 35-10



TE Part #1-1625984-9
HSA50 1K5 5%



TE Part #1-1768363-3
LBF-TRV3065694000A

Documents

Product Drawings

EPEZT * STECKHUELSE ISOLIERT 6,3 X 1,0 *

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_735278_L.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_735278_L.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_735278_L.3d_stp.zip

English

3D PDF

English



Customer View Model

[ENG_CVM_735278_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_735278_F.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_735278_F.2d_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English

[APPLICATION OF AMP FULLY INSULATED FASTON* RECEPTACLES \(6,35mm\)](#)

English