




Terminals & Splices > Quick Disconnects

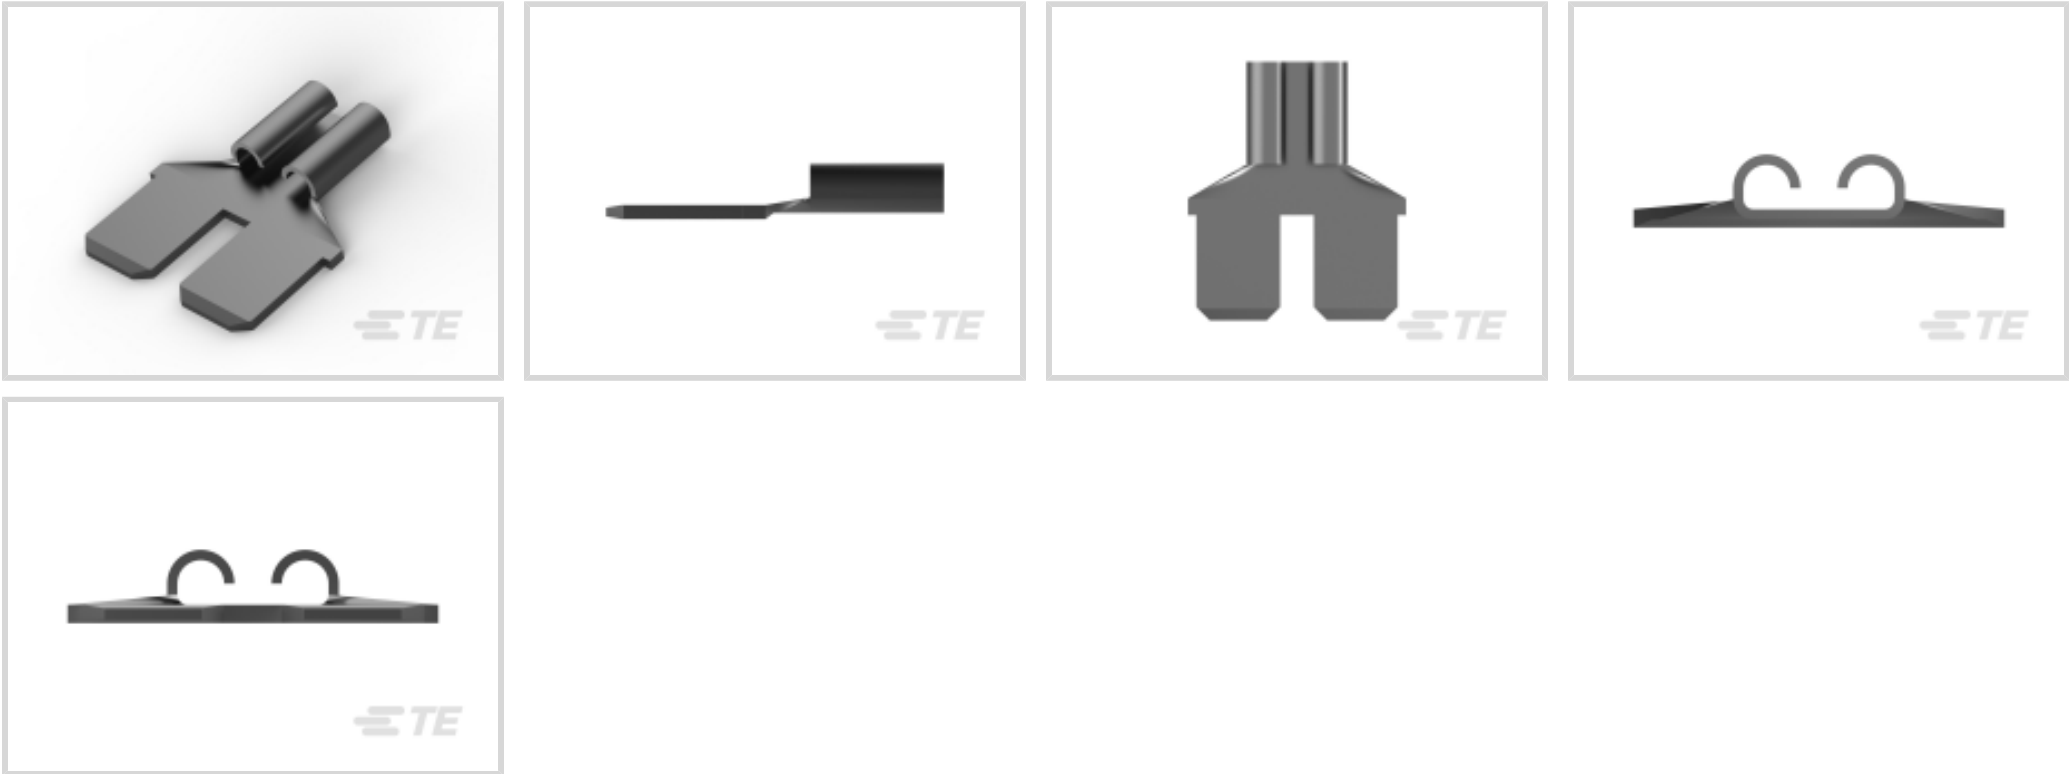

Quick Disconnect Terminal Type: **Tab & Receptacle**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Terminal Orientation: **Straight**

Contact Base Material: **Brass**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Tab & Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin

Mechanical Attachment

Wire Insulation Support	Without
Mating Retention Type	Dimple



Dimensions

Product Length	19.56 mm[.77 in]
Terminal Material Thickness	.81 mm[.032 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	1000
Packaging Method	Loose Piece/Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts



TE Part # 63699-1
ADAPTER 187 FASTON TPBR



TE Part # 8-61765-1
FASTON,ADAPTER 250 HOUSING REC&TAB TPBR



TE Part # 61765-1
FASTON ADAPTER .250 RECEPTACLE BR

Also in the Series | FASTON 250



Compression Connectors(4)




Crimp Terminal Housings(115)



Insertion & Extraction Tools(6)



Insulation Boots & Sleeves(16)

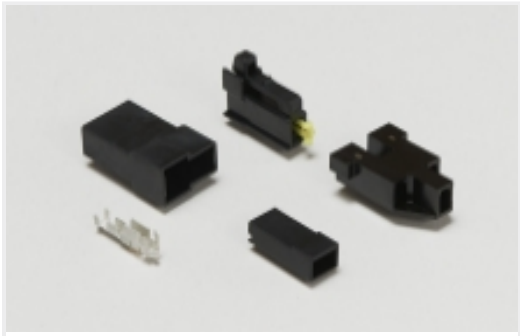

Magnet Wire Terminals(1)



PCB Terminals(133)




Quick Disconnects(418)




Splices(4)

Customers Also Bought

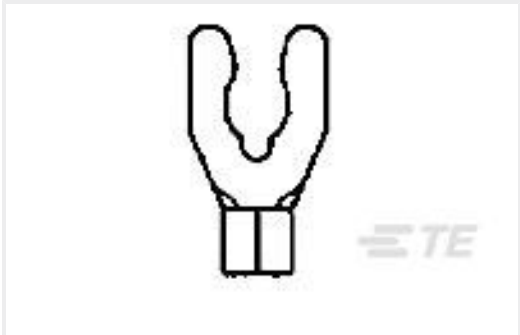

TE Part #53125-2
TERM,SOLIS, SPR SPD, 16-14, #10, TAPE

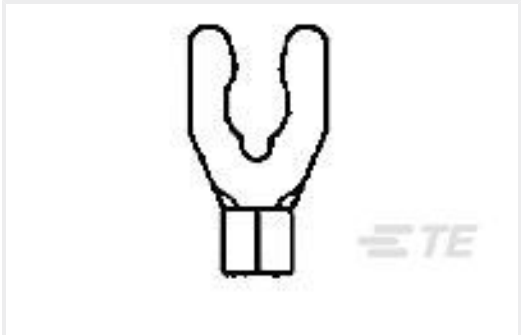

TE Part #53128-2
TERMINAL,SOLIS SPR SPD 12-10



TE Part #53874-2
TERMINAL,PG SPD FLG 16-14 8



TE Part #454575-4
BLADE, SHEAR



TE Part #1-480700-2
03P UMNL PLUG HSG RED

TE Part #1-480701-2
03P UMNL CAP HSG RED

TE Part #9-520124-2
ULTRA-FAST 187 ASY REC 16-14 AWG TPBR

TE Part #4-1393211-6
T92P11A22-277

TE Part #5-1437665-1
JC6-Q307-02=JC6 ASSEMBLY

TE Part #4-1393211-2
T92P11A22-208

Documents

Product Drawings

FASTON ADAPTER .250 REC TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_61765-2_Y.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_61765-2_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_61765-2_Y.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FASTON Tabs

English

Product Specifications

Engineering Report

English

Agency Approvals

CSA Certificate

61765-2

Quick Disconnect Tab & Receptacle, Uninsulated, 6.35 mm [.25 in] Tab Width,
Straight, Brass, Tin Plating, Loose Piece/Carton, FASTON 250



English

[CSA Certificate](#)

English