



ELECTRICAL

- Current Rating: 10A for wire 18 AWG 6A for wire 20 AWG & 22 AWG 4A for board to board connection
- Voltage Rating: 300 VAC Max

MECHANICAL

- Operating Temperature: -40°C to +105°C
- Wire Gauge: 2834167-3: 18-22 AWG (solid/stranded) 2834171-3: 20-24 AWG (solid/stranded)
- Tin dipped required for stranded

MATERIALS

• Contact: Copper alloy with tin plating

STANDARDS & SPECIFICATIONS

- Application Specification: <u>114-137166</u>
- Product Specification: <u>108-137166</u>

BUCHANAN WIREMATE CONNECTOR

SLIM POKE-IN SERIES

TE Connectivity (TE)'s BUCHANAN WireMate connector slim poke-in series is designed for quick and easy wire-to-board and board-to-board connectivity in a low profile, slim form factor. The releasable contact function along with the design for multiple wire sizes supports convenience in installation and rework. Additionally, the low profile and small footprint provides for high density and compact PCB designs.

BENEFITS

- · Releasable function helps to allow for quick rework
- Designed for compact PCB layouts
- Bare contact offers size and cost savings from housed poke-in
- · Wide range of wire sizes accepted
- · Board-to-board mating function

PRODUCT COMPLIANCE / APPROVALS

• UL Approval: UL1977 / File: E28476

APPLICATIONS



Lighting Systems



Room and Area Lighting



Security




Telecommunication Systems

CURRENT RATINGS


Part Number	Description
2834167-3	Releasable Slim Female Contact
<u>2834171-3</u>	Ultraminiature Slim Contact
2834172-3	Ultraminiature Slim Male Pin Contact

DIMENSIONS


2834167-3

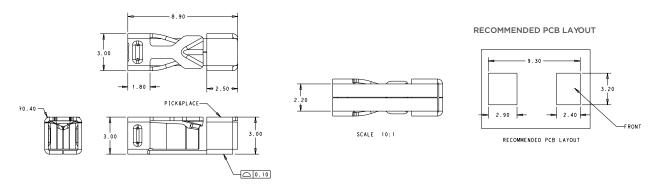

2834171-3

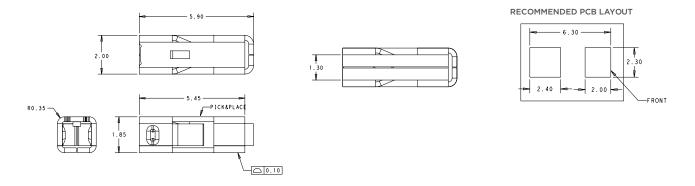

2834172-3

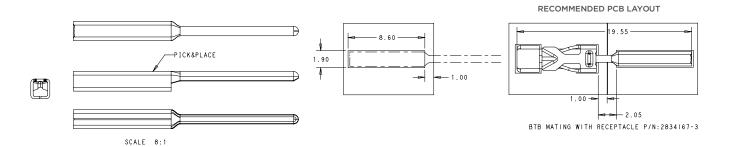

BUCHANAN WIREMATE CONNECTOR SLIM POKE-IN SERIES

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need. Visit **te.com/support** to chat with a Product Information Specialist.

te.com/buchanan-wire-mate-connectors

BUCHANAN, WireMate, TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

© 2025 TE Connectivity. All Rights Reserved.

06-25

