



PRODUCT
PN-XXXXX-XXXX



10 SETS PER POLY BAG
P/N: 89707-0177

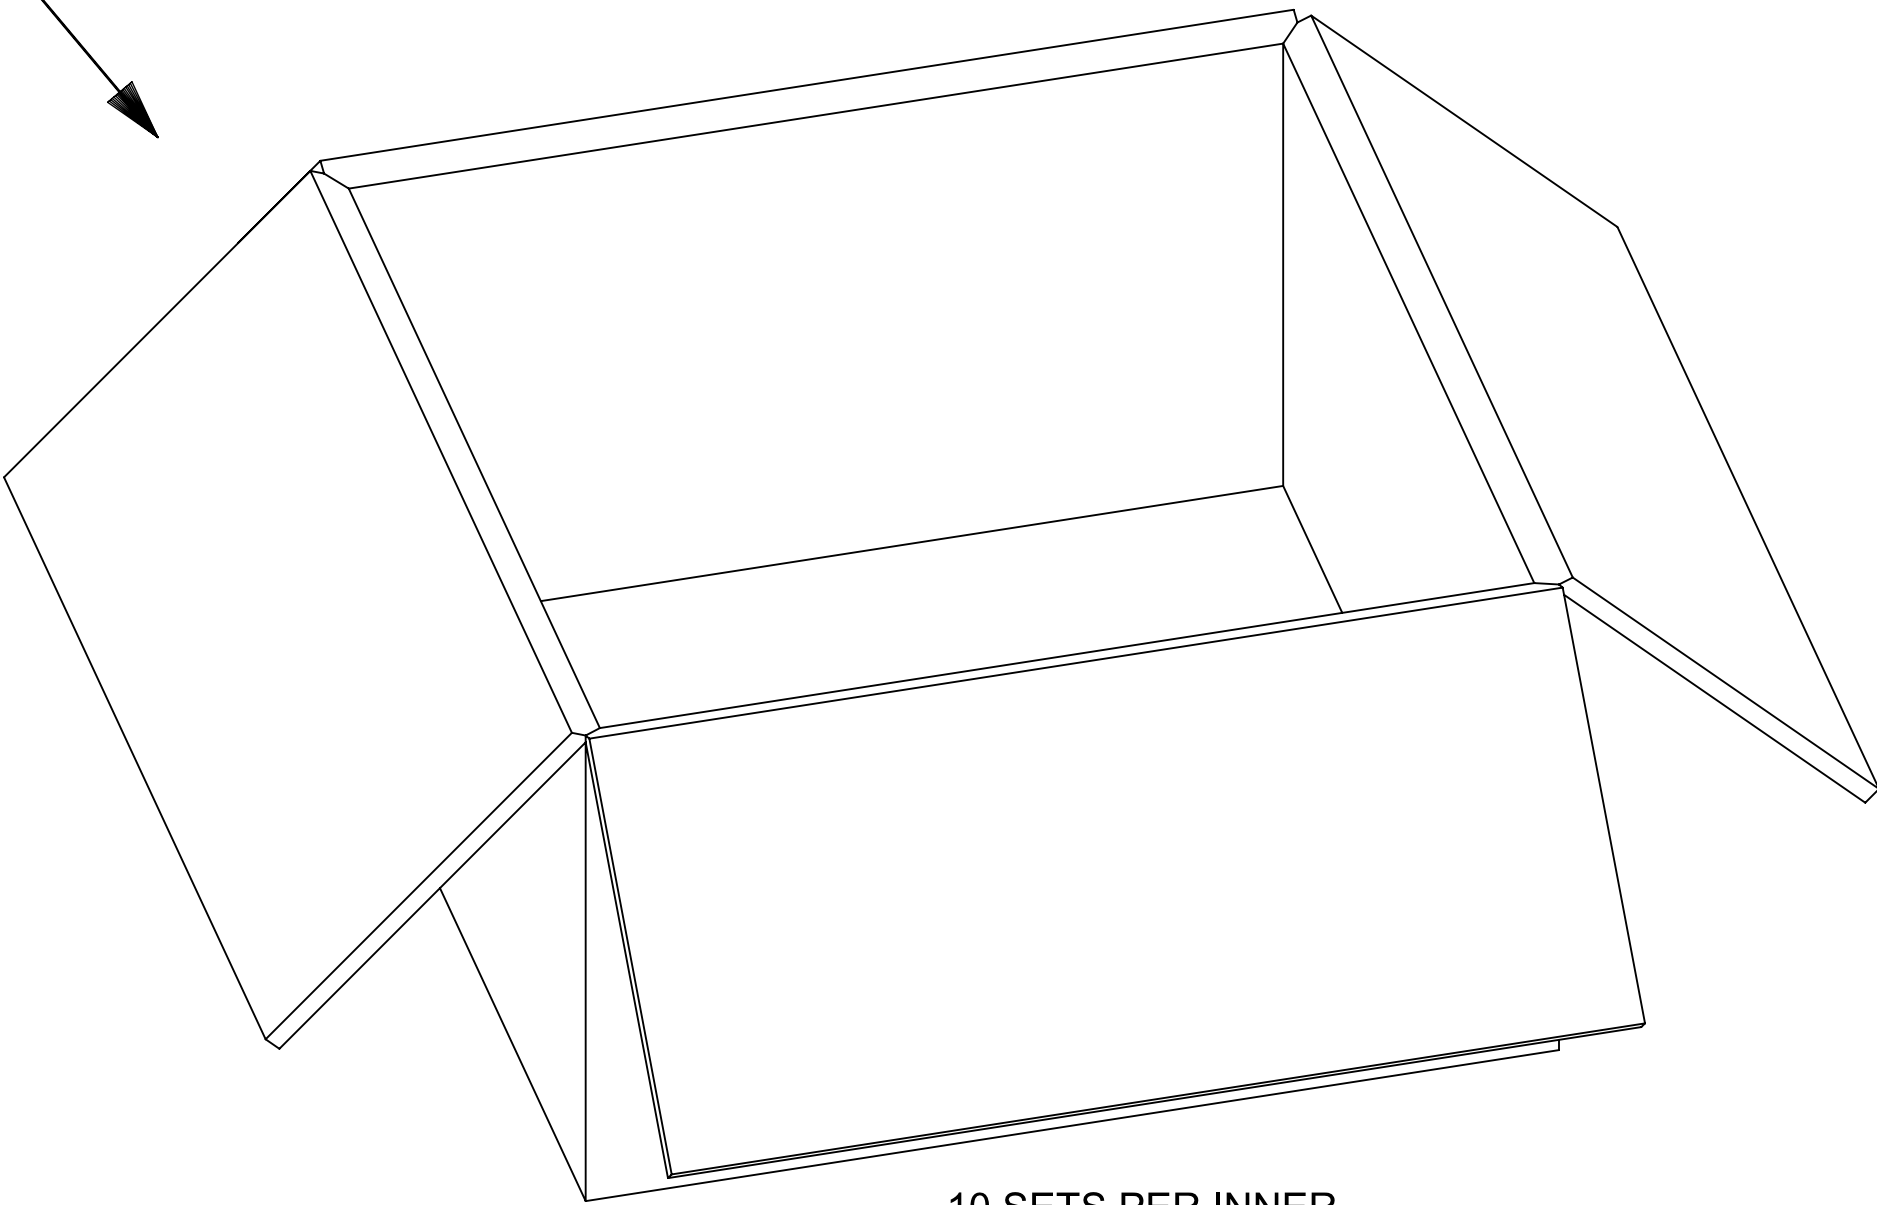

10 SETS PER INNER
CARTON BOX
P/N: 89499-9031

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
FA = 0 FE = 0 FP = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW RELEASE PER EWR-16247-A											
	MM		NTS													
	GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL ± 0.5°																
4 PLACES		±														
3 PLACES		±														
2 PLACES		±														
1 PLACE		±														
0 PLACES		±														
DIVISIONAL SYMBOLS	STATUS: Design Approved									2024-01-10		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	DRWN: Evita Lin				2024-02-16		895420650		PSD	000	A					
	CHK'D: Kerrie Chen				2024-02-17											
	APPR: Darry Cheng															
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
							C-SIZE		89542		895420650				1 OF 1	

MATERIALS AND FINISHES:

BNC PLUG STR (P/N: 73171-6840)

BODY: BERYLLIUM COPPER
PLATED NICKEL

REAR BODY, WASHER: BRASS
PLATED NICKEL

COUPLING NUT: BRASS
PLATED NICKEL

CENTER CONTACT: BRASS
PLATED GOLD

WAVE WASHER: BERYLLIUM COPPER
PLATED NICKEL

GASKET: SILICONE RUBBER

INSULATOR: TEFLON



CRIMP TUBE: BRASS
PLATED NICKEL

NOTE:

CABLE: BELDEN 4794R
OR EQUIVALENT

SHRINK TUBE VERSAFIT
OR EQUIVALENT

OPERATING TEMPERATURE RANGE: -30°C TO +75°C
MIN BEND RADIUS / MINOR AXIS: 3.25" / 82.550mm

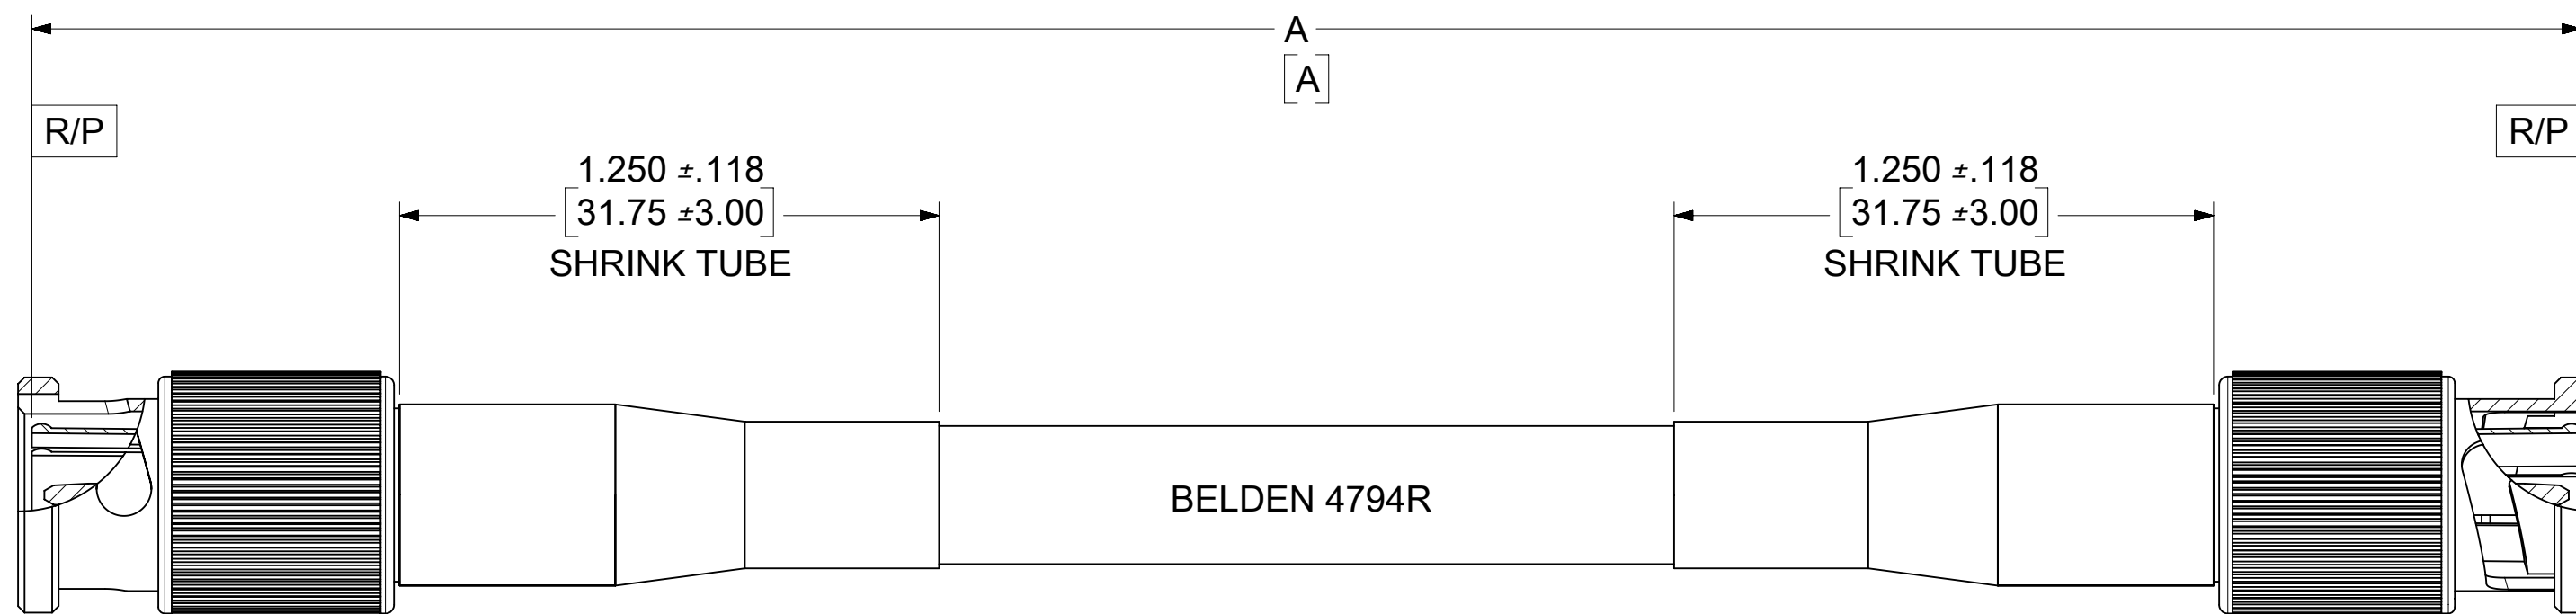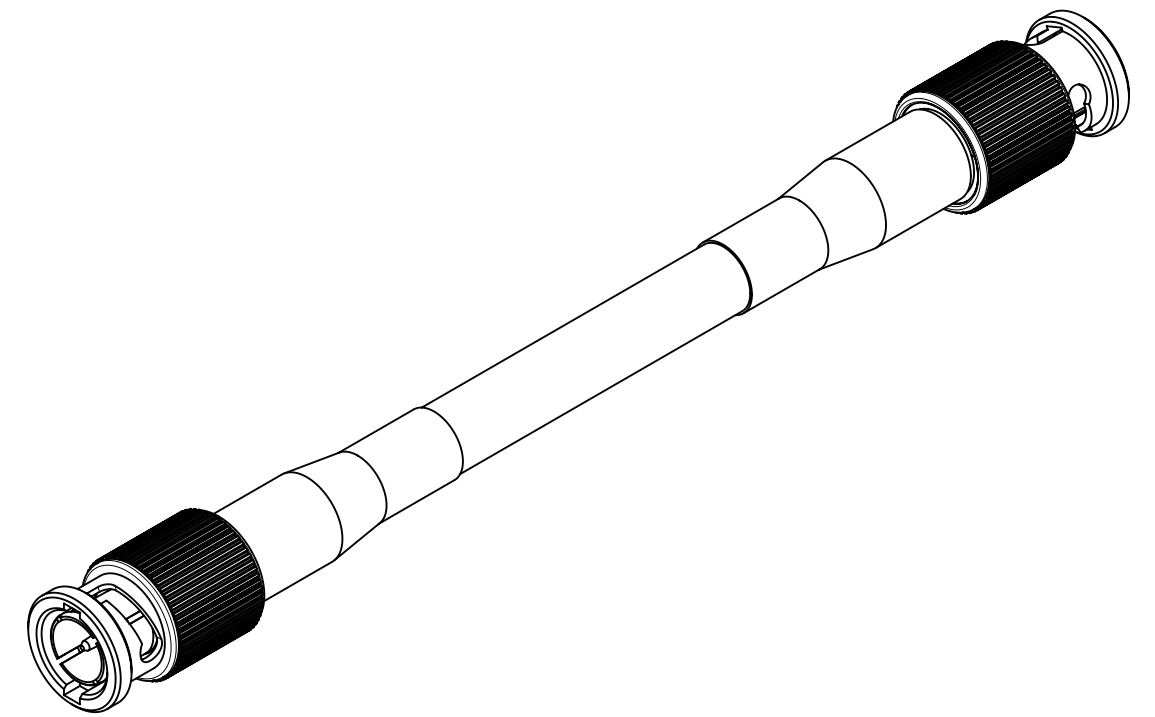

89762-9299	196.9±9.8	5000±250	BAG
89762-9298	5708.7±285.4	145000±7250	
89762-9297	118.1±5.9	3000±150	
89762-9296	78.7±3.9	2000±100	
89762-9295	2755.9±137.8	70000±3500	
89762-9294	3937.0±196.9	100000±5000	
89762-9293	1968.5±98.4	50000±2500	
89762-9292	787.4±39.4	20000±1000	
89762-9291	393.7±19.7	10000±500	
89762-9290	39.4±2.0	1000±50	
PART NO.	IN	MM	PACKAGING
DIM	A		

MIL-STD-348B, FIG. 330-2	BNC PLUG INTERFACE
SPECIFICATION	DESCRIPTION

D	2018/2/26	UPDATE VIEWS & ADD -9299 PER EWR #11808-A
REV	DATE	DESCRIPTION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: EC NO: 172689 DRWN: RYEH 2018/01/29 CHK'D: YCHENG 2018/03/15 APPR: YCHENG 2018/03/15 INITIAL REVISION: DRWN: RYEH 2016/08/09 APPR: YCHENG 2016/10/06				molex CA BNC PLUG STR BOTH END WITH BELDEN 4794R CA-BNCP/BNCP							
HYBRID		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)															
ANGULAR TOL ± 2.0 °															
4 PLACES		±													
3 PLACES		±		PRODUCT CUSTOMER DRAWING											
2 PLACES		±													
1 PLACE		±		DOCUMENT NUMBER SD-89762-929				DOC TYPE PSD		DOC PART 001		REVISION D			
0 PLACES		±													
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
								C-SIZE		89762		SEE TABLE		GENERAL MARKET	