

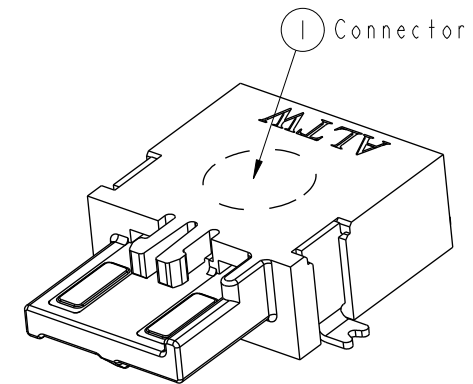
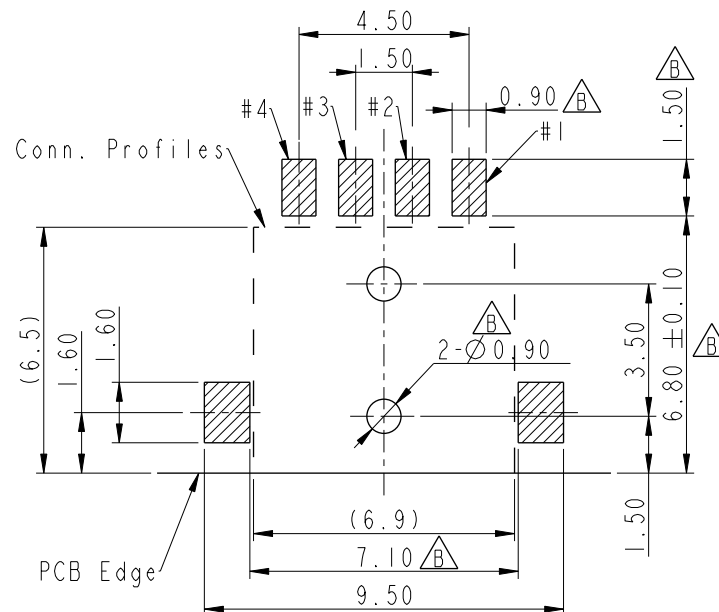
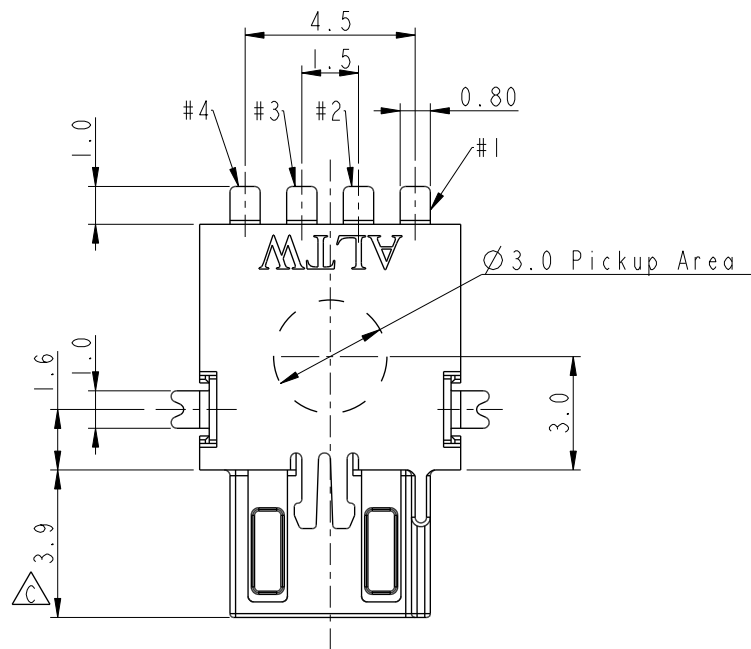


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C191205	2019/07/29	NianPing Yu	Add UL label
E	C192063	2019/12/03	NianPing Yu	△E X1
F	C220940	2022-06-22	Ruru	△E X3

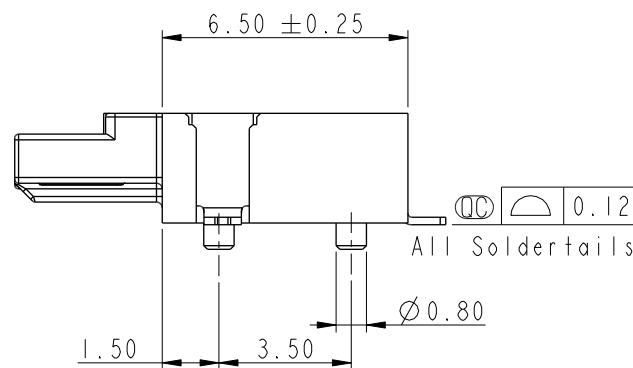

RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE IS ± 0.05

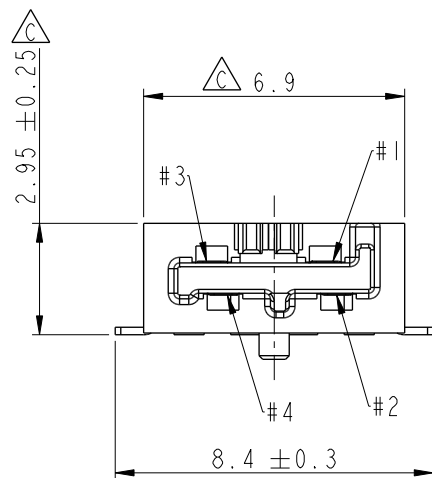

Notes:


- * CC Important Dimension To Check.
- * Housing: High temperature thermoplastic. UL94V-0, color is Natural white.
- * Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
- * Solder Peg: Copper Alloy, Tin plated over Nickel.

UNIT: mm		TITLE		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
TOLERANCE		SSL, I.I NON WP, M, 4P		安費諾亮泰企業股份有限公司		SSL11-P4C00-000001		NianPing Yu		2019/07/29	
.X ± 0.25		SMT R/A W/POST, NONE				DWG NO		CHECKED BY		DATE	
.XX ± 0.1		SCALE 6:1				SSL11-P4C00-000001		Fisher Wang		2019/07/29	
.XXX ± 0.05		SIZE A4				CUSTOMER		APPROVED BY		DATE	
ANGLES $\pm 1^\circ$		REV. F				ALTW		Max Yang		2019/07/29	
		WC-REV. A.2									
		SHEET 1 OF 2									
		QC: Inspection item									



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

1. 1000Pcs Per Reel
2. 8 Reel Per Carton
(8000Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 2.4Kg/Carton.
5. Gross Weight: 6.6Kg/Carton.

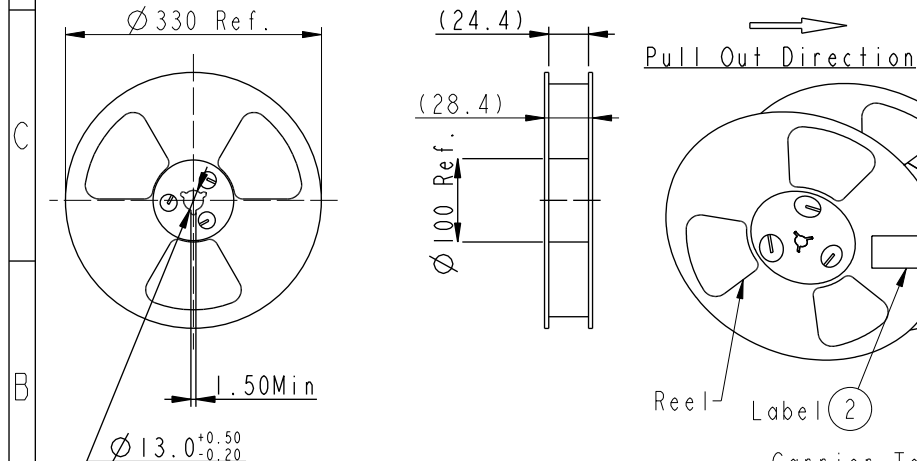

Pull Out Direction

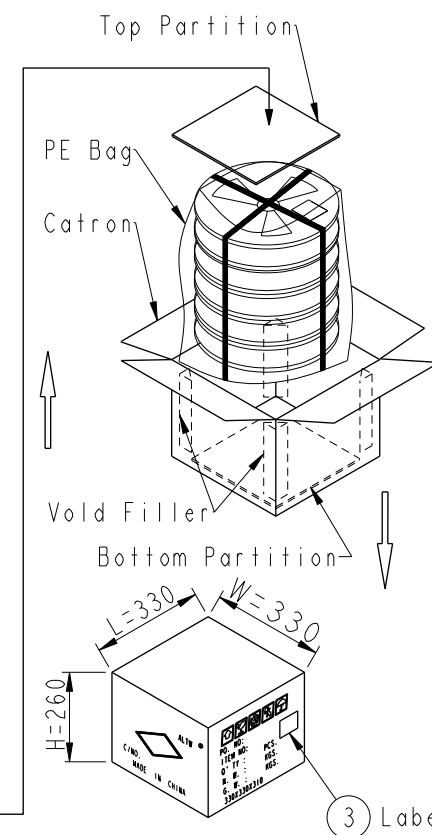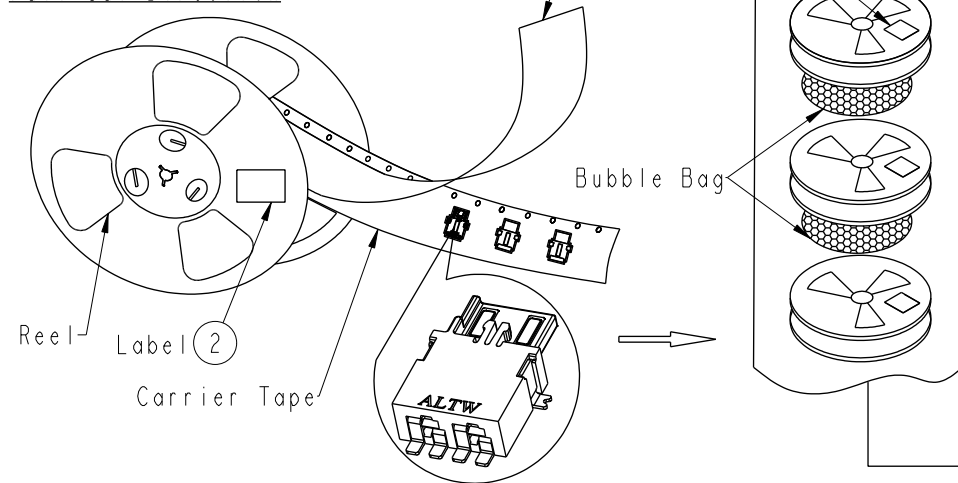

UNIT:mm		 	TITLE SSL, 1.1 NON WP, M, 4P SMT R/A W/POST, NONE 			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO SSL11-P4C00-000001		DRAWN BY NianPing Yu		DATE 2019/07/29				
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°			SCALE 5:1		SIZE A4			SHEET 2 OF 2		DWG NO SSL11-P4C00-000001		CHECKED BY Fisher Wang		DATE 2019/07/29		
			REV. F		WC-REV. A.2			QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max Yang		DATE 2019/07/29		