




Connectors > Contacts > Connector Contacts

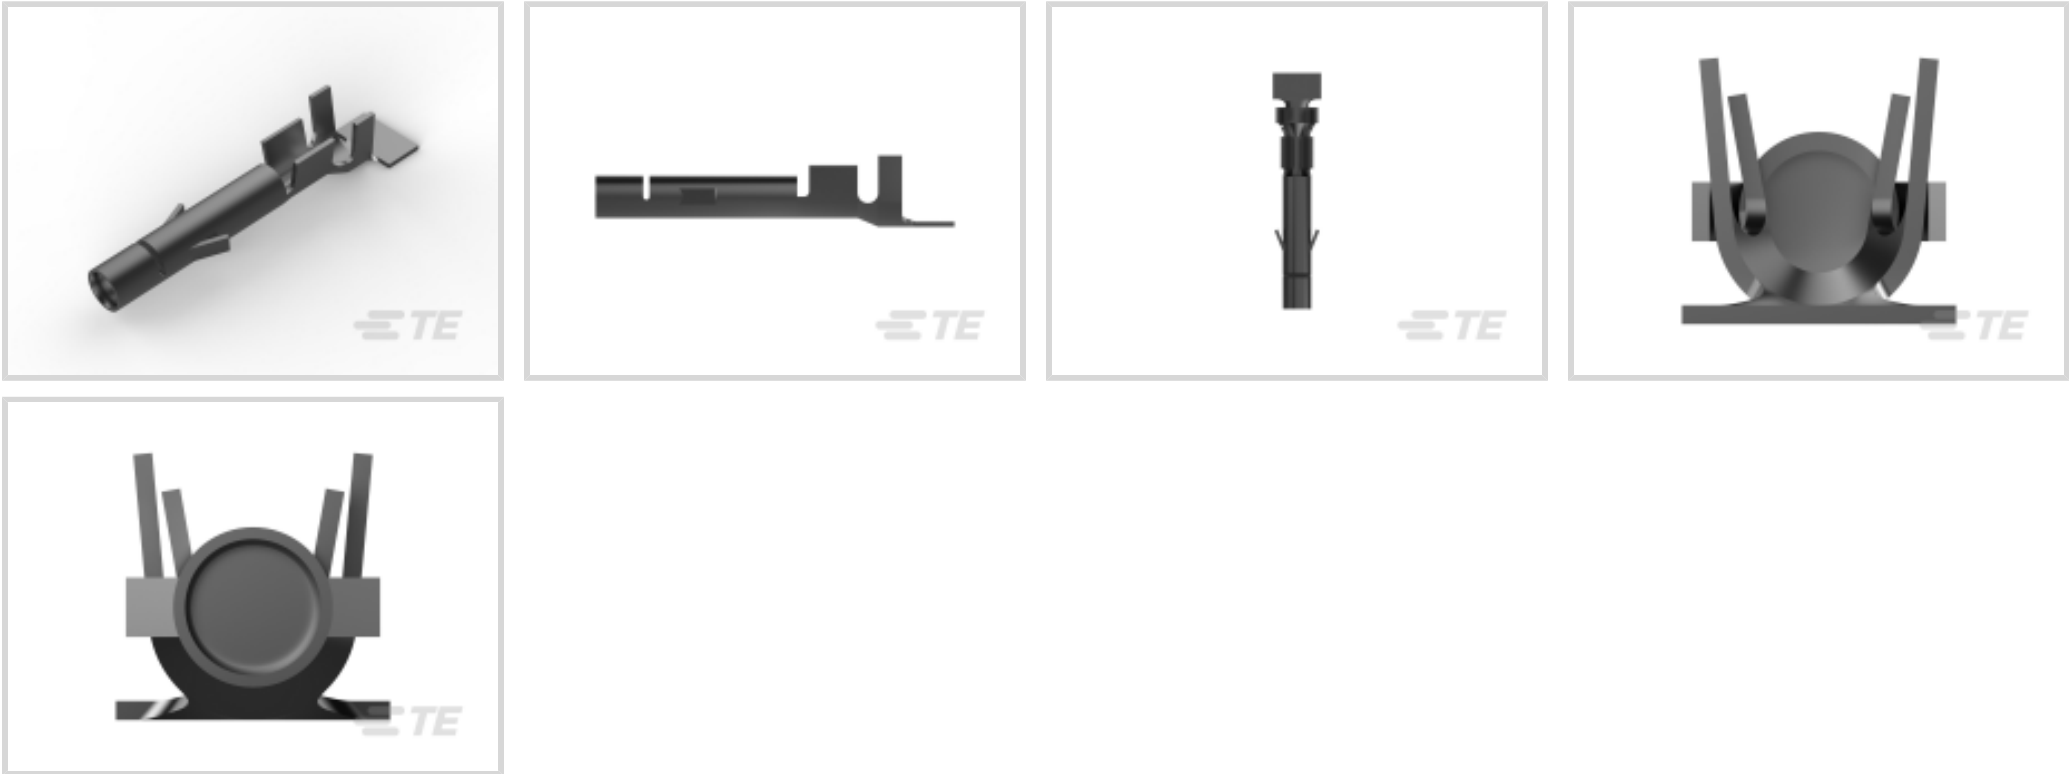

Contact Type: **Socket**
Contact Mating Area Plating Material: **Tin (Sn)**
Wire Contact Termination Area Plating Material: **Tin**
Operating Voltage: **600 VAC**
Contact Retention Within Housing: **With**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Contact Features

Contact Shape & Form	Split
Contact Type	Socket
Contact Mating Area Plating Material	Tin (Sn)
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	19 A
Mating Pin Diameter	2.06 mm[.081 in]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Straight



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
Wire Insulation Support	Without

Dimensions

Wire Size	.5 – 2.1 mm²
Compatible Insulation Diameter Range	3.3 mm[.13 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL, VDE
---	--------------

Packaging Features

Packaging Quantity	1000
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>





EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

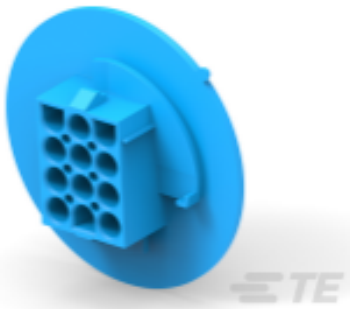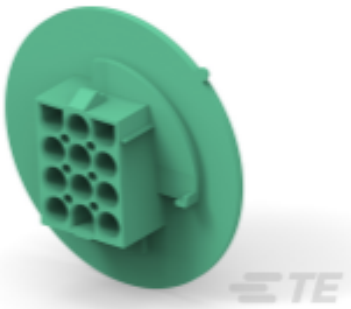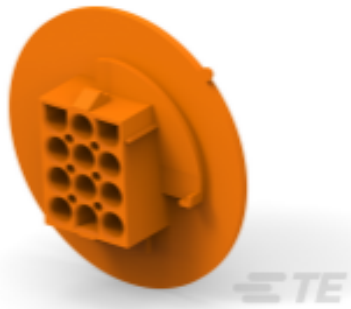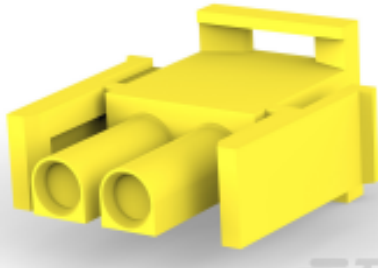
 TE Part # 1-794762-6 12P UMNL CAP HSG, PAN MNT, BLUE	 TE Part # 1-794762-5 12P UMNL CAP HSG, PAN MNT, GREEN	 TE Part # 350736-1 15P UMNL PLUG HSG	 TE Part # 1-794762-3 12P UMNL CAP HSG, PAN MNT, ORANGE
 TE Part # 1-480710-1 15P UMNL PLUG HSG BRN	 TE Part # 1-350777-4 02P UMNL V0 PLUG HSG YELLOW	 TE Part # 1-480764-0 05P UMNL CAP HSG NATL	 TE Part # 1-794761-4 09P UMNL CAP HSG, P/MT, V0, YELLOW
 TE Part # 1-794761-5 09P UMNL CAP HSG, P/MT, V0, GREEN	 TE Part # 640585-1 06P UMNL PLUG HSG V2 NATL	 TE Part # 1-350766-8 03P UMNL V0 PLUG HSG GRAY	 TE Part # 926302-1 10& UNIV.M-N-L.PLUG




TE Part # 1-350720-9
09P UMNL V0 PLUG HSG BLACK




TE Part # 1-350777-8
02P UMNL V0 PLUG HSG GRAY




TE Part # 1-794761-1
09P UMNL CAP HSG,P/MT,V0,BROWN

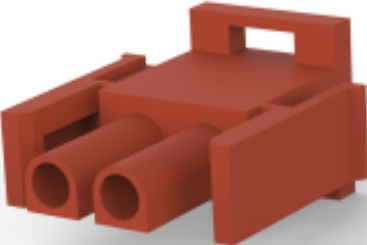

TE Part # 1-480698-1
02P UMNL PLUG HSG BRN

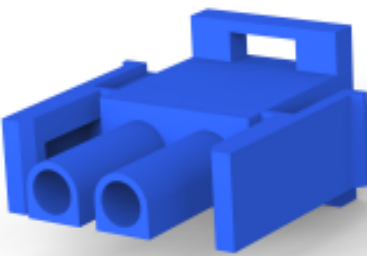

TE Part # 1-480698-6
02P UMNL PLUG HSG BLU



TE Part # 1-480700-8
03P UMNL PLUG HSG GRY



TE Part # 1-480702-2
04P UMNL PLUG HSG RED



TE Part # 1-480703-1
04P UMNL CAP HSG BRN

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Contacts(206)



Connector Hardware(12)



Power Contacts(206)



Rectangular Power Connectors(642)



Standard Circular Connectors(1)

Customers Also Bought



TE Part #3521964001
RNF-100-1/2-X-FSP



TE Part #1SNA165575R2500
M35/16.PE.N



TE Part #5053304016
RNF-100-1-2-SP



TE Part #1SNK167031R0000
MC812PA 3 (x100) Horizontal



TE Part #172520-3
LOW PRO MINI AMP-IN HDR 3P



TE Part #3-2176325-5
CRGP 0402 6K8 1%




TE Part #2176507-6
CJP 200W 1R5 5% Lead



TE Part #2-2176507-0
CJP 200W 22R 5% Lead



TE Part #1-2176508-8
CJP 300W 15R 5% Lead



TE Part #7-1768019-3
EK820

Documents

Product Drawings
UNIV.M-N-L.SOCKET

English

CAD Files
Customer View Model
ENG_CVM_CVM_926893-3_K.2d_dxf.zip

English

3D PDF

3D

Customer View Model
ENG_CVM_CVM_926893-3_K.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_926893-3_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications
Application Specification

English

Agency Approvals
VDE Certificate

English

VDE Certificate

English

926893-3

Tin (Sn), Socket Contact, 20 – 14 AWG, 600 VAC, .5 – 2.1 mm² Wire, Locking Lance
Contact Retention, Crimp, Phosphor Bronze, Universal MATE-N-LOK

