

TE Internal #: 225532-3
SMA Connector, Plug, 50 ohm, Threaded, 18 GHz, 1 Position, Wire & Cable, Cable Mount (Free-Hanging), -65 – 165 °C [-85 – 329 °F], Crimp, Straight, SMA

[View on TE.com >](#)



Connectors > RF Connectors > Coax Connectors



RF Interface: **SMA**
RF Connector Style: **Plug**
RF Connector Mated Outer Diameter (Approximate): **8.99 mm [.354 in]**
Impedance: **50 Ω**
RF Connector Coupling Mechanism: **Threaded**

Features

Product Type Features

Connector Seal & Plug Type	Interface Seal
Connector Product Type	Connector Assembly
RF Interface	SMA
RF Connector Style	Plug
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 Ω
-----------	------

Body Features

Body Material	Stainless Steel
Body Material Finish	Passivated

Contact Features

Ferrule Plating Material	Tin-Lead
Crimp Type	Hexagonal Crimping
RF Connector Contact Configuration	Not Captivated
RF Connector Center Contact Underplating Material	Nickel



Ferrule Material	Copper
RF Connector Center Contact Plating Material	Gold (Au)
RF Connector Center Contact Material	Brass

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	Mechanical

Housing Features

Body Orientation	Straight
------------------	----------

Dimensions

Product Length	26.17 mm[1.03 in]
RF Connector Mated Outer Diameter (Approximate)	8.99 mm[.354 in]

Usage Conditions

Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
-----------------------------	----------------------------

Operation/Application

Operating Frequency Range	18 GHz
---------------------------	--------

Packaging Features

Packaging Method	Package
------------------	---------

Other

Grade	Military
Coupling Nut Base Material	Stainless Steel
Coupling Nut Plating Finish	Passivated
Military Category	B
Dielectric Material	Polytetrafluoroethylene (PTFE)

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions



China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 220061-1
DAHT COAXICON RG188 RG58 C
ASSY

Also in the Series | SMA

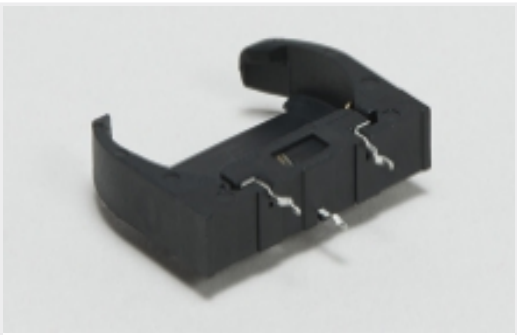

Battery Holders(1)




Connector Adapters & Connector Savers(8)



Connector Caps & Covers(3)




Connector Strain Relief(1)

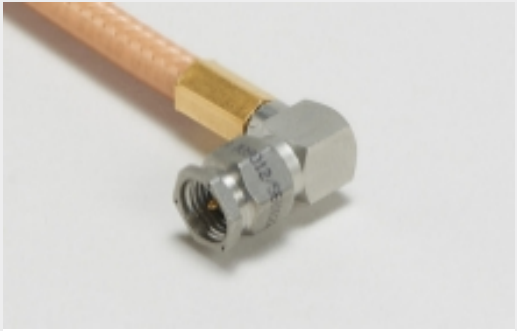

RF Cable Assemblies(119)

Customers Also Bought

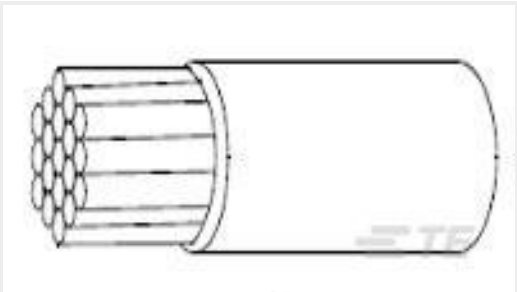

TE Part #216375-002
22759/32-22-2



TE Part #154763-E
SMCB 12 M AB VV 7-03 CL * 0007 137 E004



TE Part #SPD-4-3
STRING POT 4.75 INCH RANGE



TE Part #34318-1
SOLIS, PARA 8 60/40 SN-PB



TE Part #204504-1
RECEPT ASSY,SZ 3,AMPLIMITE



TE Part #9-1393211-9
T92S7A12-240



TE Part #9-1609095-1
5FB3=F8363



TE Part #1-1617121-1
JMAC-26XP = M39016/9-062P



TE Part #5225555-6
TNC PLUG DUAL W/P TR



TE Part #5226993-1
VERTICAL JACK, BNC PCB

Documents



Product Drawings

SMA PLUG FLEX

English

SMA PLUG FLEX

English

SMA PLUG FLEX

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_225532-3_AH.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_225532-3_AH.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_225532-3_AH.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

DEUTSCH MIL-DTL-38999 CIRCULAR CONNECTORS

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English