



Antennas



Communication Protocol: ISM, LoRaWAN, Zigbee

Mounting Location: Internal/Embedded

Mounting Type: Adhesive Mount

Frequency Category: 698 – 960

Antenna Type: Flexible PCB (FPC)

Features

Product Type Features

Antenna Termination	MHF, MHF1, U.FL, UMCC
Antenna Product Type	Antenna

Configuration Features

Antenna Style	Flexible PCB
Mounting Location	Internal/Embedded
Antenna Type	Flexible PCB (FPC)
Band Type	Single Band

Electrical Characteristics

Impedance	50 Ω
Antenna Operation	Passive
VSWR (Max)	<2.5:1

Signal Characteristics

Frequency Band	868 – 915 MHz
Gain (Max)	3.2 dB, 4.5 dB



Frequency Category	698 – 960
Peak Gain	3 < 6 dBi

Body Features

Product Weight	1 g[.35 oz]
----------------	-------------

Mechanical Attachment

Polarization	Linear
Mounting Type	Adhesive Mount

Dimensions

Product Width	9 mm[.354 in]
Product Length	38 mm[1.49 in]
Product Height	.19 mm[.007 in]
Cable Length	.1 m[.33 ft]
Cable Insulation Diameter (Max)	1.13 mm[.044 in]

Operation/Application

Directionality	Omnidirectional
----------------	-----------------

Industry Standards

Communication Protocol	ISM, LoRaWAN, Zigbee
Primary Application	ISM, LoRaWAN, Zigbee

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Bag & Box
------------------	-----------

Other

Precision Level	Standard
-----------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	




Current ECHA Candidate List: JUNE 2025
(250)
Candidate List Declared Against: JAN 2021
(211)
Does not contain REACH SVHC

Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

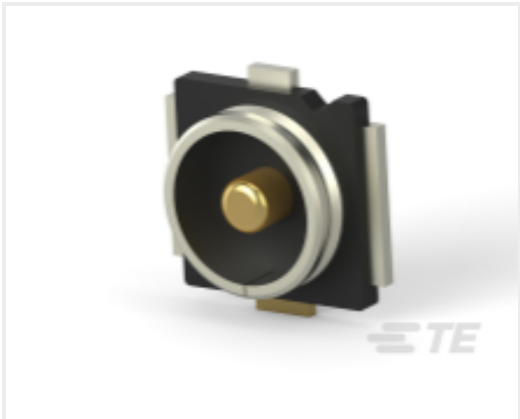


TE Part # 2334884-1
UMCC Micro-Coax receptacle, Gen 4

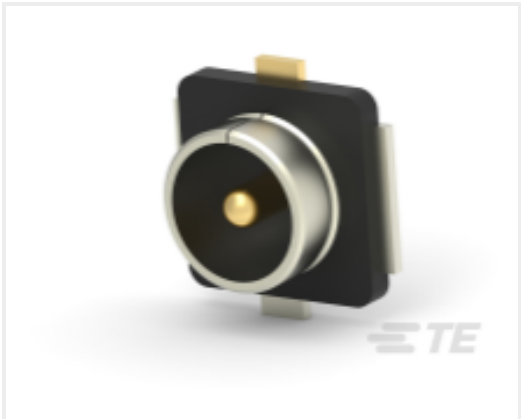

TE Part # 2337019-1
UMCC Micro-Coax receptacle, Gen 1


Customers Also Bought

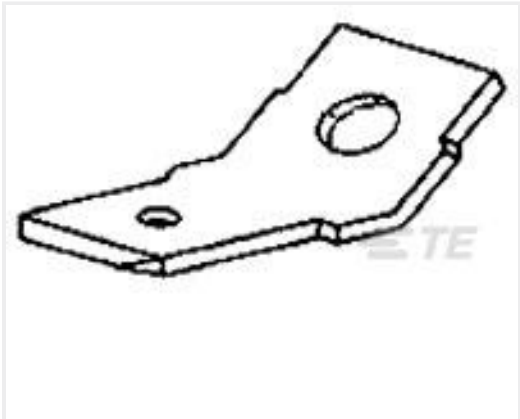

TE Part #61664-1
187 FASTON TAB TPBR




TE Part #292207-8
MINI CT SGL DIP V 8P NAT

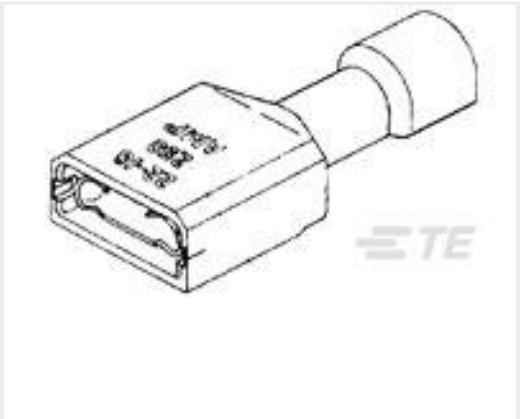

TE Part #2-520262-2
ULTRAFast 187 ASSY REC 22-18 TPBR LP



TE Part #3-794679-8
08P MICRO MNL ASSY,R/A,THRU,LF

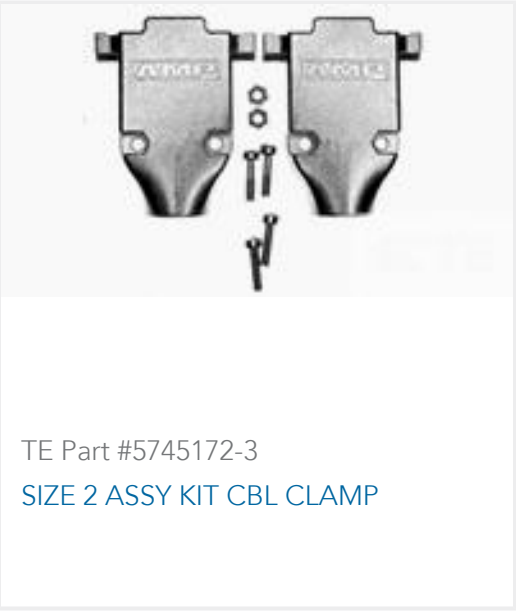

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2195835-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2195835-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2195835-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ISM 868 / 915 MHz ANTENNA

English

Product Specifications

Product Specification

English