


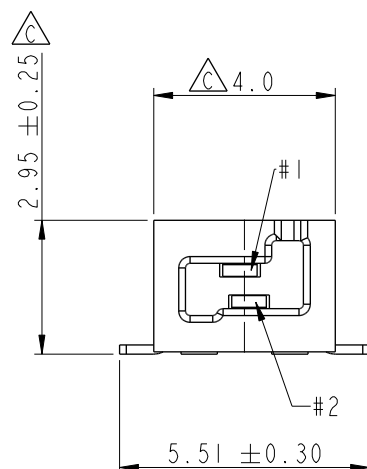
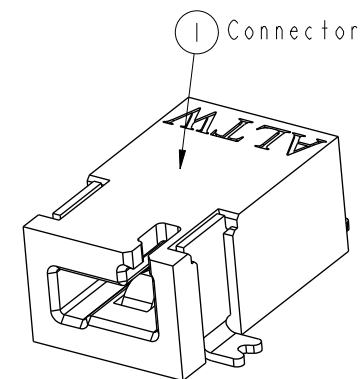
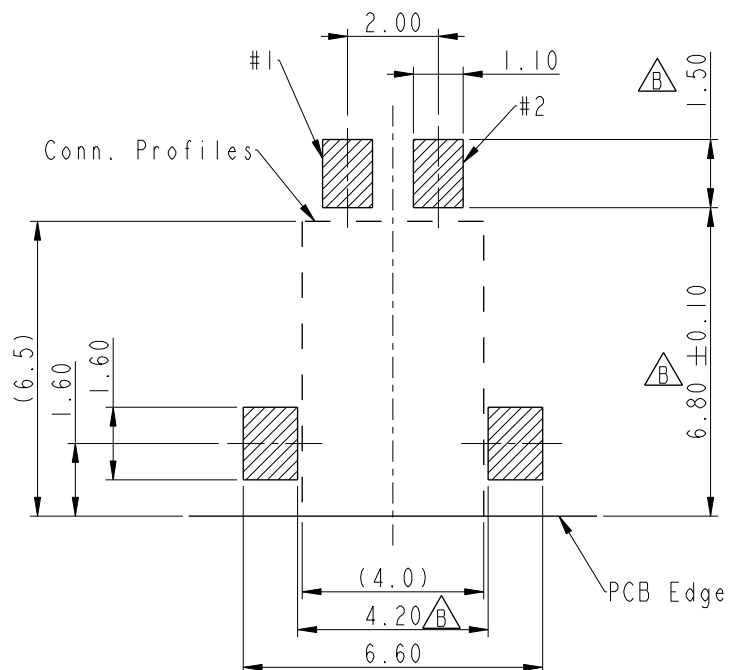


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C191496	2019-08-29	NianPing Yu	Add UL Label
E	C192063	2019-12-03	NianPing Yu	△E X1
F	C220940	2022-06-20	Ruru	△F X3

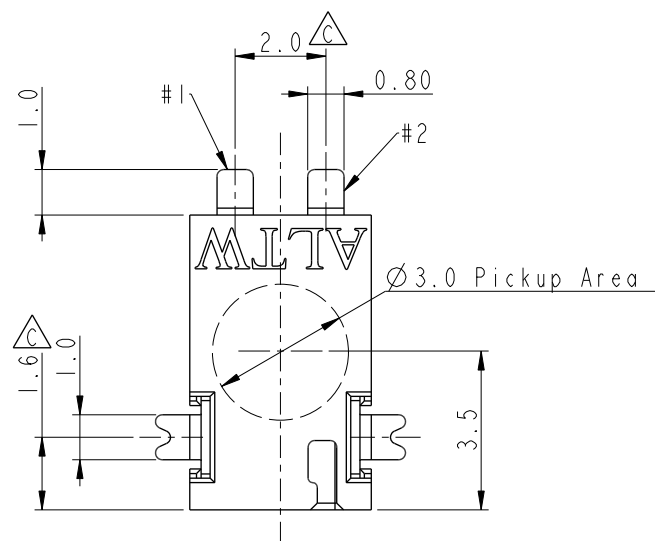

RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE IS ± 0.05



Notes:

- * $\varnothing$ Important Dimension To Check.
- * Housing: High temperature thermoplastic. UL94V-0, color is Natural white.
- * Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
- * Solder Peg: Copper Alloy, Tin plated over Nickel.

UNIT:mm		TITLE	SSL, 1.1 NON WP, F, 2P SMT R/A W/O POST, NONE
TOLERANCE	± 0.25 ± 0.1 ± 0.05 $\pm 1^\circ$	SCALE	6:1
REV.	F	SIZE	A4
WC-REV.	.0	SHEET	1 OF 2
QC	Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	SSL11-J2D00-000001	DRAWN BY	NianPing Yu	DATE	2019-08-29
DWG NO	SSL11-J2D00-000001	CHECKED BY	Fisher Wang	DATE	2019-08-29
CUSTOMER	ALTW	APPROVED BY	Max Yang	DATE	2019-08-29


MATERIALS

1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

QUANTITY


1. 1200Pcs Per Reel
2. 8 Reel Per Carton (9600Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 1.2Kg/Carton.
5. Gross Weight: 6.0Kg/Carton.

Pull Out Direction


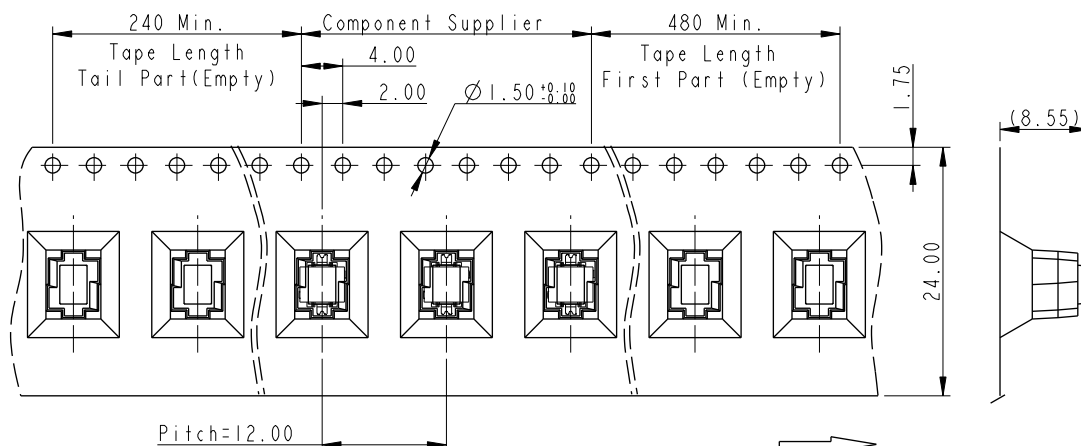


Pitch=12.00


Pull Out Direction

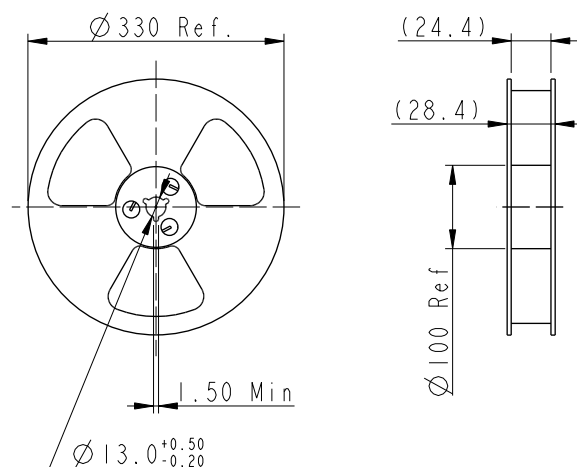

Reel For Carrier Tape

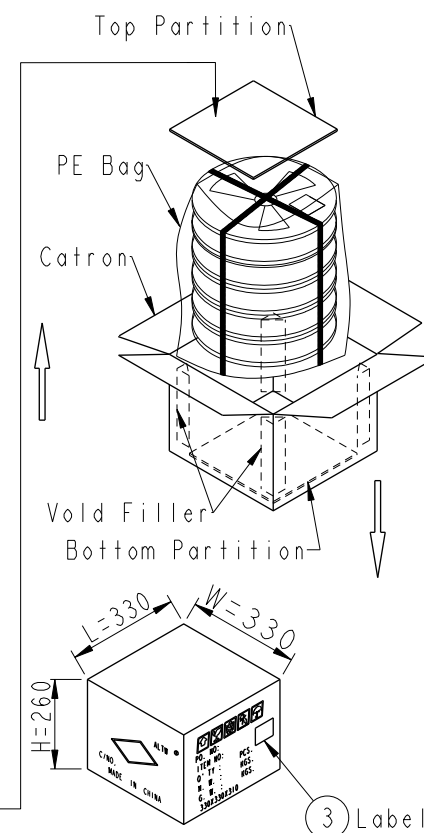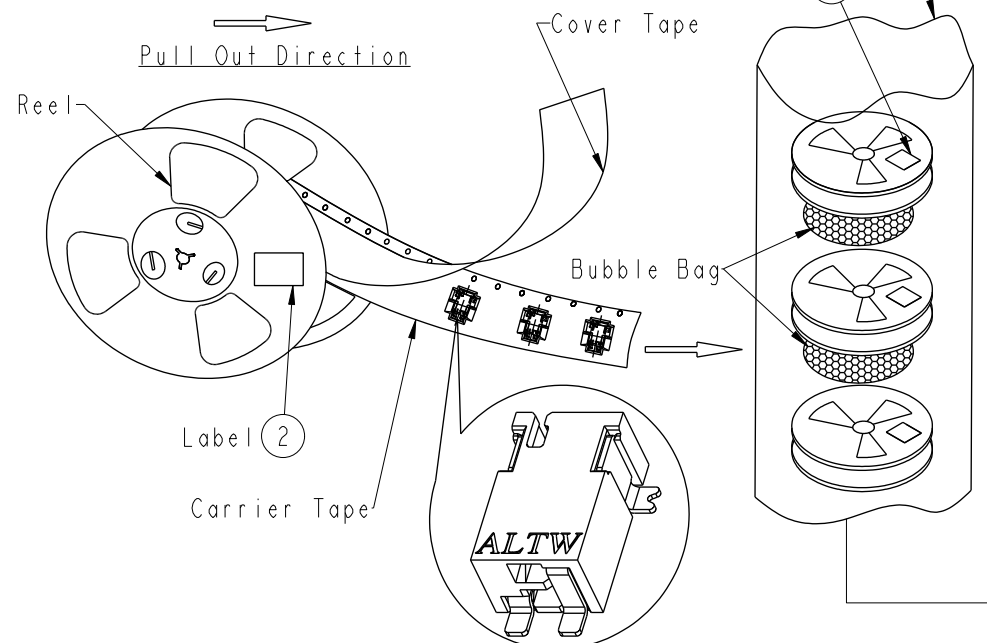

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE

SSL, 1.1 NON WP, F, 2P
SMT R/A W/O POST, NONE

SCALE

5:1

SIZE

A4

SHEET

2 OF 2

REV.

F

WC-REV.

A.8

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

SSL11-J2D00-000001

DWG NO

SSL11-J2D00-000001

CUSTOMER

ALTW

DRAWN BY

NianPing Yu

CHECKED BY

Fisher Wang

APPROVED BY

Max Yang

DATE

2019-08-29

DATE

2019-08-29

DATE

2019-08-29