

385 SERIES

Pull Action Latch Clamps | Dimensions

Features:

- Heavy duty U-hook style latch clamps are supplied with threaded U-hooks for easy adjustment
- Supplied with patented thumb control lever for one handed operation
- DESTACO® Toggle Lock Plus™ versions available

Applications:

- Molding
- Closures for doors, lids, covers
- Assembly

Also Available:

- Clamps with longer hooks available Upon Request that are 25mm, 50mm, 100mm longer than standard length
- To order clamp with longer hook, add **-M-25**, **-M-50**, or **-M-100** to the end of the model. Example: 385-**M-50**

Covered under one or more U.S./International Patents

385
385-SS



385-**R**
385-**RSS**
with DESTACO®
Toggle Lock
Plus™



385-**L**
Low Profile
Handle




385102
Optional
Latch Plate
for 385, 385-R
and 385-L



385902
Optional Stainless
Latch Plate for
385-SS and
385-RSS



Technical Information | Holding Capacities



Model	Max. Holding Capacity	Weight	EF:AF	Drawing Movement	Latch Plate/Cleat (Optional)	Replacement Hook Assembly	Hook Adj. Range
385		[3.3 lbs] 1,50 kg					
385-SS					385102	385215	
385-R	[7500 lbf] 33300 N	[3.4 lbs] 1,54 kg	44:1	[2.19] 55,6	385902 (Stainless Steel)	385915 (Stainless Steel)	[1.36] 34,5
385-RSS							
385-L		[3.3 lbs] 1,50 kg					

ⓘ This item is available upon request. EF = Exerting Force, AF = Applied Force


385, 385-R, 385-L SERIES

Pull Action Latch Clamps | Dimensions


385
385-SS



385-R
385-RSS
with DESTACO®
Toggle Lock
Plus™

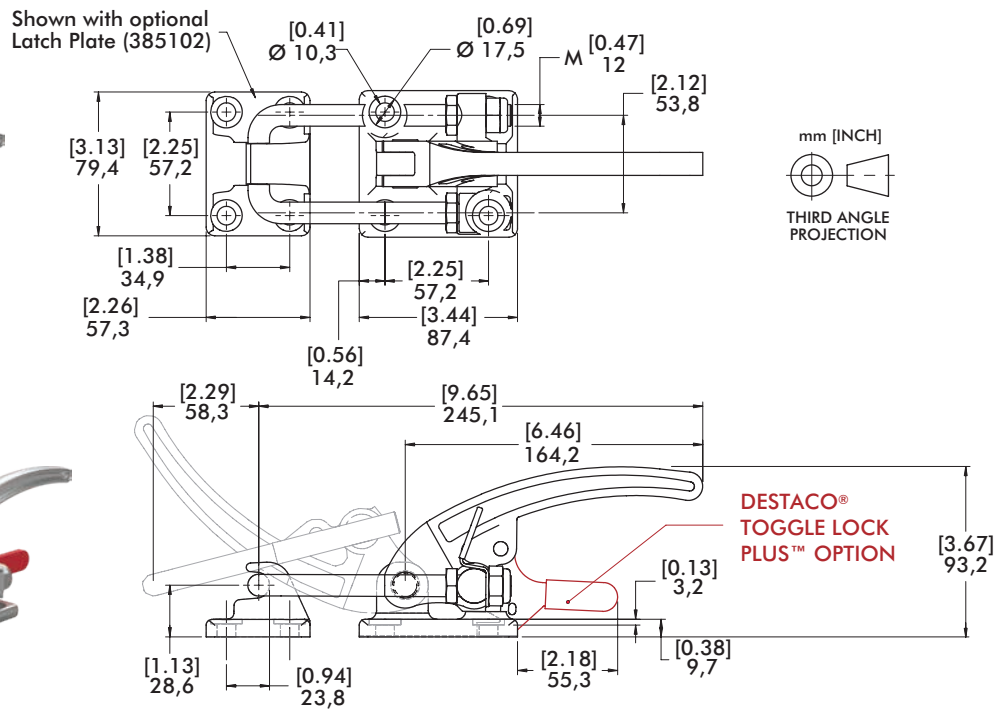

385-L
Low Profile
Handle

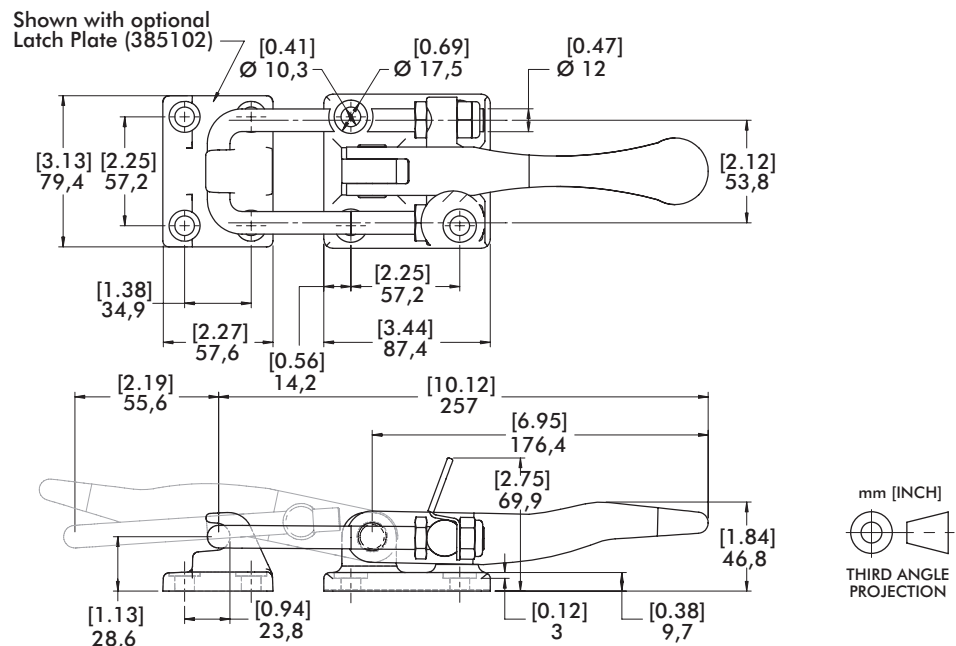

385, 385-R, 385-L SERIES

Pull Action Latch Clamps | Replacement Hook Assembly | Dimensions

Replacement Hook Assembly	Used on Clamp Model	A	B	C	M	Material
385215	385, 385-R, 385-L	[5.72] 145,3	[2.75] 70	[2.12] 53,8	M12 x 1.75	Steel
385215-M-25 ⓘ	385-M-25, 385-R-M-25 385-L-M-25	[6.72] 170,7	[3.75] 95,3			
385215-M-50 ⓘ	385-M-50, 385-R-M-50 385-L-M-50	[7.72] 196	[4.75] 120,7			
385215-M-100 ⓘ	385-M-100, 385-R-M-100 385-L-M-100	[9.72] 247	[6.75] 171,5			
385915	385-SS, 385-RSS	[5.72] 145,3	[2.75] 70			Stainless Steel
385915-M-25 ⓘ	385-SS-M-25, 385-RSS-M-25	[6.72] 170,7	[3.75] 95,3			
385915-M-50 ⓘ	385-SS-M-50, 385-RSS-M-50	[7.72] 196	[4.75] 120,7			
385915-M-100 ⓘ	385-SS-M-100, 385-RSS-M-100	[9.72] 247	[6.75] 171,5			

ⓘ This item is available upon request.

Replacement Thumb Control Lever	Used on Clamp Model
385-ZB1	385, 385-R, 385-L, 385-SS, 385-RSS

