

Data Sheet | Item Number: 216-243


Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

<https://www.wago.com/216-243>



Color: ■ red

Similar to illustration

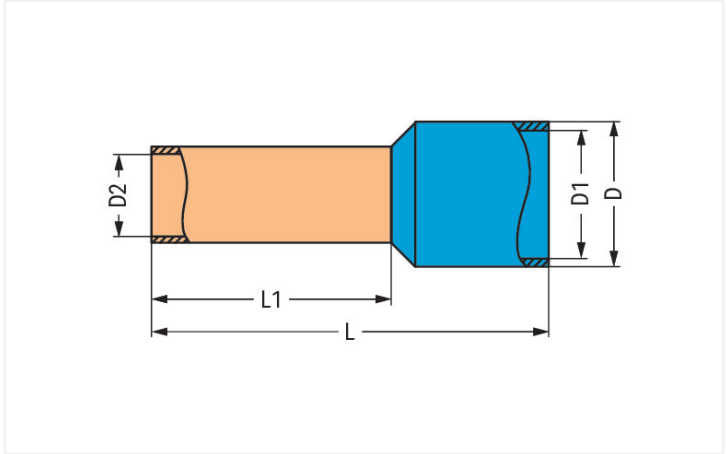

Dimensions in mm

Connection data	
Cross-section metric	1 mm²
Strip length	12 ... 13 mm / 0.47 ... 0.51 inches
Cross-section AWG	18 AWG

Physical data	
Wall thickness plastic collar	0.25 mm
Total length	16 mm
Wall thickness crimp sleeve	0.15 mm
Crimp length (length of sleeve)	10 mm
Inner Diameter plastic collar	3 mm
Diameter crimp sleeve inside	1.4 mm

Mechanical data	
Plastic collar	Standard collar
Suitable	2001 – 2002 Series

Material data	
Color	red
Fire load	0 MJ
Weight	0.1 g

Commercial data	
Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 8.0	EC000005
PU (SPU)	1000 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918016339
Customs tariff number	85369010000



Product classification		
UNSPSC		39121405

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-243

↓

Documentation				
Bid Text				
216-243	19.02.2019	xml	2.80 KB	↓
216-243	11.09.2017	doc	23.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable