
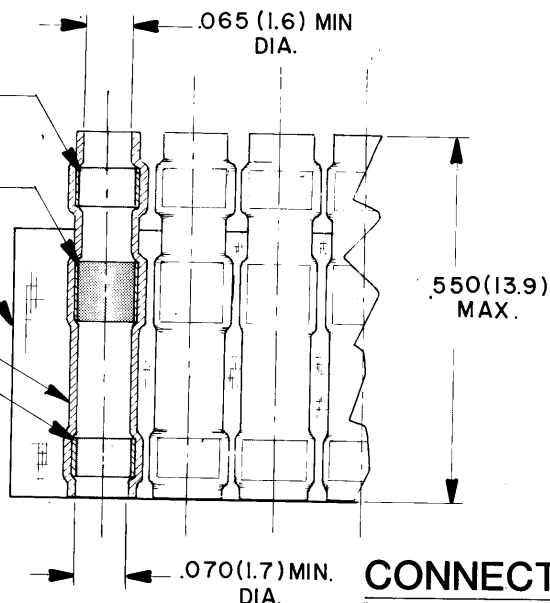


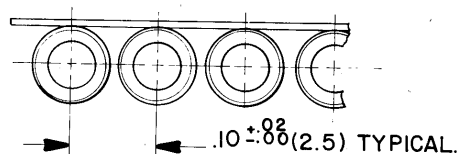

NOTES:

1. MATERIALS:

I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLDENE FLUORIDE, TRANSPARENT BLUE.

I-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: Sb5 SRAP PER QQ-S-571.

I-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

I-D CARRIER STRIP; ADHESIVE COATED HIGH TEMPERATURE TAPE.

2. A CTA-0026 ASSEMBLY CONSISTS OF 10 EACH CTA-0025 SOLDER SLEEVE WIRE TERMINATORS.

3. THESE SLEEVES ARE DESIGNED TO ATTACH "20 THROUGH"26 GAGE TIN PLATED OR SILVER PLATED CONDUCTORS TO TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE:		DRAWN SA. LOPEZ 5/19/79		Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
.XXX: ± (M. M.) .XX: ± (M. M.) Δ: ±		CHECKED <i>Rdy</i> APPROVED <i>Rdy</i> 5/31/79 APPROVED <i>E. Stead</i> 6/5/79 APPROVED <i>HO</i> 6/11/79			
		PROJECT 6448 - 7055		SIZE B	CODE IDENT NO. 06090
				DWG. NO. CTA-0026	
				WEIGHT	
				SHEET 1 OF 1	

TITLE SOLDER PAK ASSEMBLY, DOUBLE
MELTABLE INSERT - 10 SLEEVES
TEMP RATING 150°C(Sb5) MTC100 SERIES