## BSTS-11X25-CL/NM ACTIVE



#### RAYCHEM | RAYCHEM BSTS

TE Internal #: CB5025-000


Heat Shrink Tubing, Clear, 3:1, Single Wall, Shrinks To 9.52 mm [.

375 in], Irradiated Modified Polyolefin, RAYCHEM BSTS

View on TE.com >



Heat Shrink Tubing > BSTS/BSTS-FR Heat Shrink Tubing



Tubing Product Type: Heat Shrink Tubing

Primary Product Color: Clear

Wall Type: Single Wall

Expanded Inside Diameter (Min): 27.94 mm [ 1.1 in ] Recovered Inside Diameter (Max): 9.52 mm [ .375 in ]

All BSTS/BSTS-FR Heat Shrink Tubing (80)

#### **Features**

#### **Product Type Features**

Tubing Product Type	Heat Shrink Tubing
Wall Type	Single Wall

#### **Electrical Characteristics**

Operating Voltage (Max)	.6 kV	
-------------------------	-------	--

#### **Body Features**

Fluid Type	Water
Primary Product Color	Clear
Shrink Ratio	3:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Rigid

#### **Dimensions**

	300 in
Recovered Wall Thickness (Tolerance)	3.05 mm[.12 in]
Expanded Inside Diameter (Min)	27.94 mm[1.1 in]
Recovered Inside Diameter (Max)	9.52 mm[.375 in]
Tubing Size Range	9.52 – 27.94 mm[.375 – 1.1 in]

### **Usage Conditions**



Resistance Properties	Moisture
Shrink Temperature (Min)	90 °C
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-55 - 110 °C[-67 - 230 °F]
Recovery Temperature	121 °C
Operation/Application	
Mechanical Resistance	Abrasion, Fluids, Mechanical Damage, Strain Relief
Product Availability	
Applicable Region	Global
Packaging Features	
Packaging Method	Box
Other	
Meets Low Outgassing Requirements	No

Czech Republic

### **Product Compliance**

**Product Source** 

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous




materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts



### Also in the Series | RAYCHEM BSTS

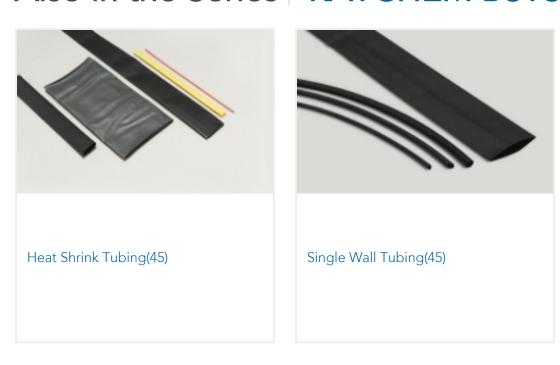

# Customers Also Bought























#### **Documents**

**Product Drawings** 

BSTS-11X25-CL/NM

English

Datasheets & Catalog Pages

Selecting\_Correct\_Tubing\_1216

English

Application Tooling for Raychem Heat Shrink Product

English

Measuring\_Single\_Wall\_Tubing

English

BSTS\_BSTS-FR Pages from 9-1773447-9

English

**Product Specifications** 

**Quality Specification** 

English