



Energy & Power > Power Cable Accessories > Joints & Splices



Installation Technology: **Power Gel**

Product Availability: **Americas**

Installation Instruction: **English**

Voltage Class: **≤ 1 kV**

Joints & Splice Product Type: **Motor Connection Kit**

Features

Product Type Features

Adhesive Coating	With
Installation Technology	Power Gel
Joints & Splice Product Type	Motor Connection Kit
Closing Method	Snap

Electrical Characteristics

Voltage Class	≤ 1 kV
---------------	--------

Body Features

Flexibility	Semi-Flexible
-------------	---------------

Mechanical Attachment

Mechanical Reinforcement	Molded Cap Clamp
--------------------------	------------------

Dimensions

Compatible Conductor Cross-Section Range	8 – 35 mm²
Compatible Cable Cross-Section - Main (Max)	35 mm²
Compatible Cable Cross-Section - Main (Min)	8 mm²

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Fluid Resistance Type	Motor Oil, Sodium Hydroxide, Sulfuric Acid, Transformer Oil



Environmental Resistance	Moisture, Self-Sealing
--------------------------	------------------------

Operation/Application

Mechanical Resistance	Abrasion Resistant (2040 gm wt, 4000 cycles, 5% max thickness loss), Against Mechanical Impact or Damage
UV-Stabilized	Yes
Thermal Resistance	Applicable for Low Temperatures, Applicable for High Temperatures, Flame-Retardant

Industry Standards

Compatible With Approved Standards Products	ANSI C119.1, UL
---	-----------------

Product Availability

Product Availability	Americas
----------------------	----------

Packaging Features

Packaging Method	Bag
Packaging Quantity	5

Other

Product Use	PowerGel-filled cap for motor lead and stub splice connections
Installation Instruction	English

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

TE Part # F40658-000
GELCAP-SL-2/0-3HOLE(B10)

TE Part # CP1967-000
GELCAP-SL-2/0-3HOLE-B100

TE Part # 566376-000
GELCAP-1(B5)

TE Part # 292284-000
GELCAP-4(B5)

TE Part # 632692-000
GELCAP-3(B5)

Also in the Series | RAYCHEM GelCap

Joints & Splices(6)

Customers Also Bought



TE Part #663016-000
MWTM-160/50-1500/S(S5)



TE Part #831828N001
402W439/S(S5)




TE Part #66261-2
MALE CONTACT ASSY. (L.P.)



TE Part #323975
SPLICE, BUTT, PIDG, 24-20



TE Part #4-1393117-2
KUP-11D11-24=KU




TE Part #934099-000
HVT-252-GP-CL



TE Part #320457-000
CBR-6-2-A-(B3)



TE Part #CN58
CONN,NM, NM, CRIMP FOR RG58

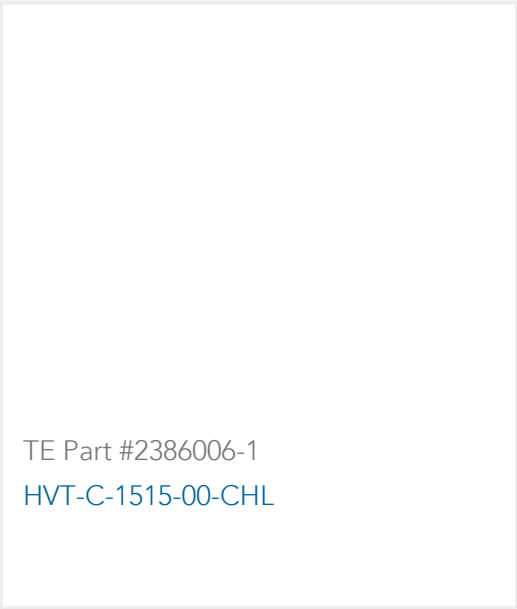

TE Part #2386006-1
HVT-C-1515-00-CHL

Documents

Product Drawings

GELCAP-2(B5)

English

Datasheets & Catalog Pages

GELCAP-MOTOR-CONNECTION-CABLE-ACCESSORIES

English

Instruction Sheets

Instruction Sheet (U.S.)

English