



Energy & Power > Power Cable Accessories > Joints & Splices



Installation Technology: **Power Gel**

Product Availability: **Americas**

Installation Instruction: **English**

Voltage Class: **≤ 1 kV**

Joints & Splice Product Type: **Tap Splice**

Features

Product Type Features

|                              |            |
|------------------------------|------------|
| Adhesive Coating             | With       |
| Installation Technology      | Power Gel  |
| Joints & Splice Product Type | Tap Splice |
| Closing Method               | Snap       |

Electrical Characteristics

|               |        |
|---------------|--------|
| Voltage Class | ≤ 1 kV |
|---------------|--------|

Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Mechanical Attachment

|                          |    |
|--------------------------|----|
| Mechanical Reinforcement | No |
|--------------------------|----|

Dimensions

|                                             |                |
|---------------------------------------------|----------------|
| Width (Installed)                           | 41 mm[1.63 in] |
| Height (Installed)                          | 27 mm[1.06 in] |
| Length (Installed)                          | 70 mm[2.75 in] |
| Compatible Conductor Cross-Section Range    | 2 – 35 mm²     |
| Compatible Cable Cross-Section - Main (Max) | 35 mm²         |
| Compatible Cable Cross-Section - Main (Min) | 2 mm²          |



Usage Conditions

|                             |                                                            |
|-----------------------------|------------------------------------------------------------|
| Operating Temperature Range | -40 – 90 °C[-40 – 194 °F]                                  |
| Fluid Resistance Type       | Hydrocarbons, Transformer Oil                              |
| Environmental Resistance    | Contaminated Water, Moisture, Rain, Salt Water, Weathering |

Operation/Application

|                       |                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------|
| Mechanical Resistance | Against Mechanical Impact                                                             |
| UV-Stabilized         | Yes                                                                                   |
| Thermal Resistance    | Applicable for Low Temperatures,<br>Applicable for High Temperatures, Flame-Retardant |

Product Availability

|                      |          |
|----------------------|----------|
| Product Availability | Americas |
|----------------------|----------|

Packaging Features

|                    |     |
|--------------------|-----|
| Packaging Method   | Bag |
| Packaging Quantity | 18  |

Other

|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| Product Use              | PowerGel-filled box for LV underground & overhead tap splices. |
| Installation Instruction | English                                                        |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JAN 2021 (211)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                               |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                   |



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 446451-000  
GTAP-2(B18)



TE Part # 888615-000  
GTAP-1(B72)



TE Part # 981609-000  
GTAP-2(B72)

Also in the Series | RAYCHEM GTAP



Joints & Splices(3)


Customers Also Bought



TE Part #408971-000  
GILS-4/0(B18)



TE Part #A90301-000  
BCAC-G-5D/8-01(B12)

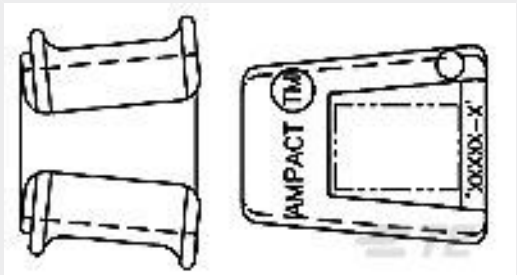

TE Part #602013  
AMPACT Tap 336.4-4

Documents

Datasheets & Catalog Pages  
GTAP-SPLICE-CABLE-ACCESSORIES



English

Instruction Sheets

Instruction Sheet (U.S.)

English