




EMI & EMC Solutions > EMI Shielding > Conductive Elastomers > Extruded EMI Gasket Conductive Strip

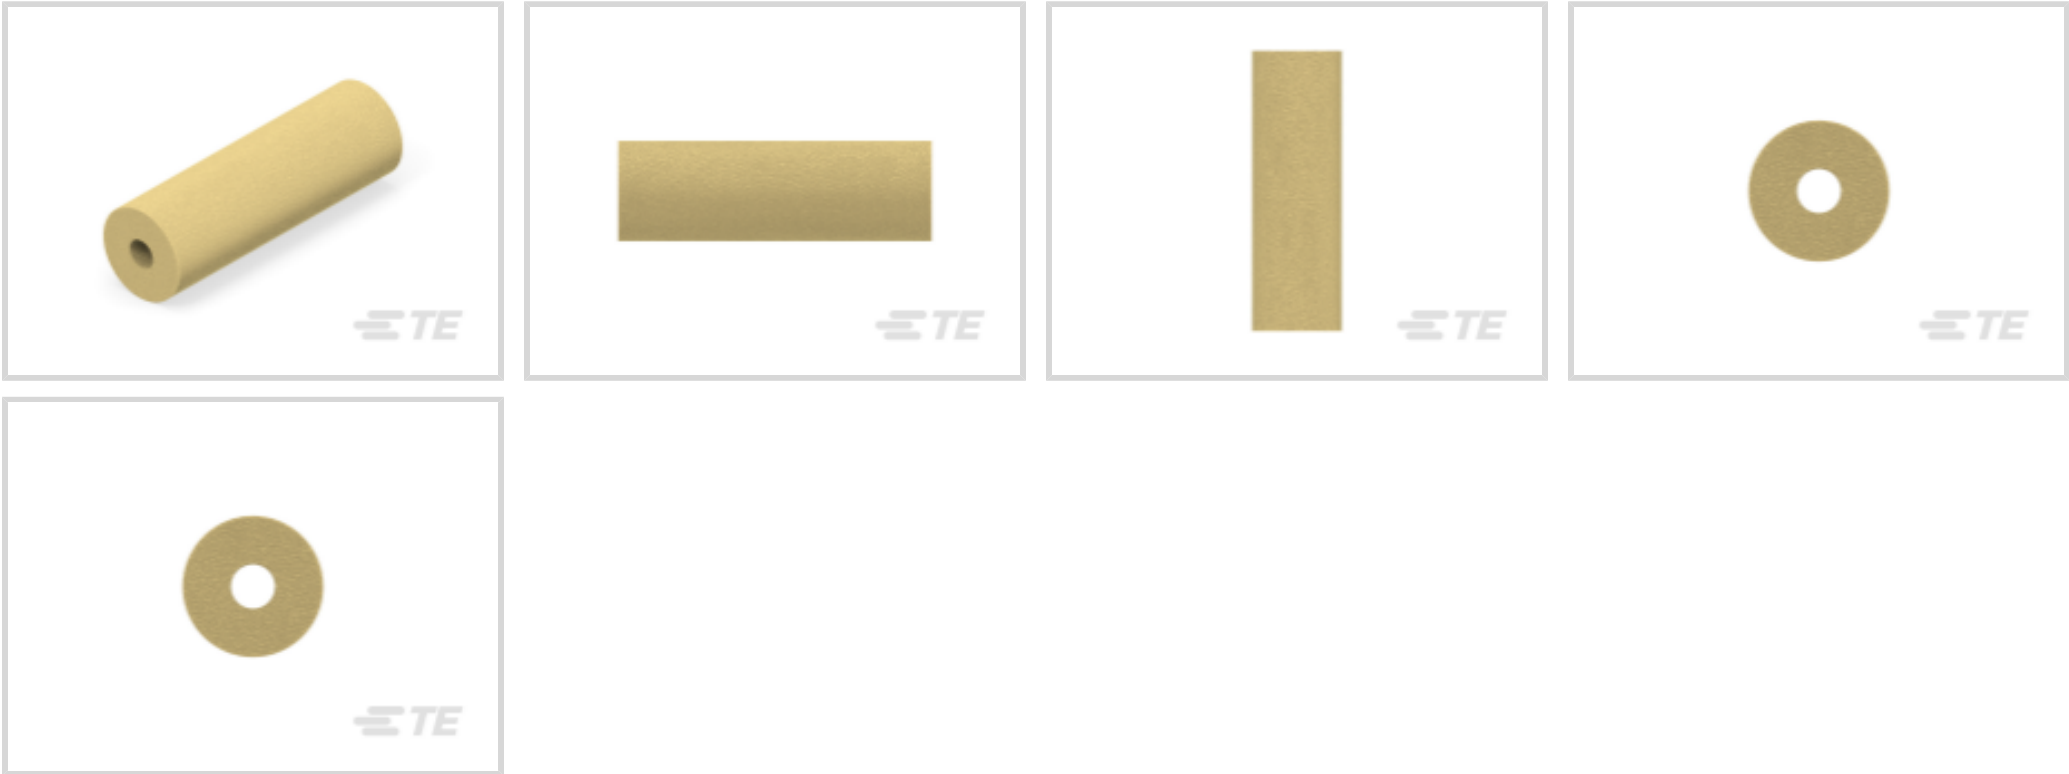

Gasket Type: Extruded EMI Gasket

Finished Type: Conductive Strip

Binding Material: Silicone

Filler Material: Silver Plated Aluminum (Ag/Al)

Gasket Shape: Tube

[All Extruded EMI Gasket Conductive Strip \(56\)](#)

Features

Product Type Features

Finished Type	Conductive Strip
Binding Material	Silicone
Filler Material	Silver Plated Aluminum (Ag/Al)

Electrical Characteristics

Resistance to Petroleum	No
Volume Resistivity (Max)	.008 Ω.cm

Body Features

Gasket Type	Extruded EMI Gasket
Gasket Shape	Tube

Dimensions

Product Length	10 m[32.8 ft]
Outside Diameter	2.6 mm[.102 in]



Inside Diameter	1.1 mm[.043 in]
-----------------	-----------------

Usage Conditions

Operating Temperature Range	-55 – 160 °C[-67 – 320 °F]
-----------------------------	----------------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: DCP (.22% in Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





TE Part # CAT-EMIG-0001
Extruded EMI Gasket Conductive Strip




TE Part # 2452645-1
SNA Tube 2.6mm OD x 1.1mm ID x 10m L



TE Part # 2510029-1
1202-FSA-0014-0005-DL117.5mm

Also in the Series | **Kemtron 1202 Series**

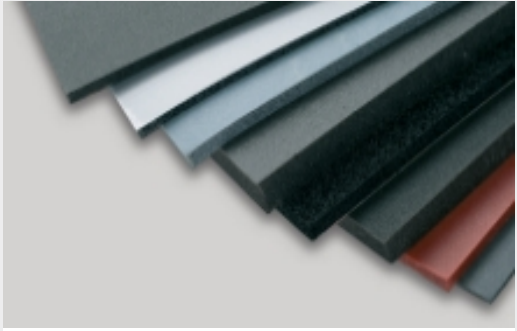


Conductive Elastomers(36)

Customers Also Bought



TE Part #YDIV46E11-35SNV001
PLUG ASSY



TE Part #1SNA176791R2100
CPV4-5




TE Part #667353-000
CWT-1501



TE Part #281739-3
HEADER HE14 STRAIGHT 2X3 P



TE Part #281839-4
HOUSING HE13 HE14 COSI 2X4 P

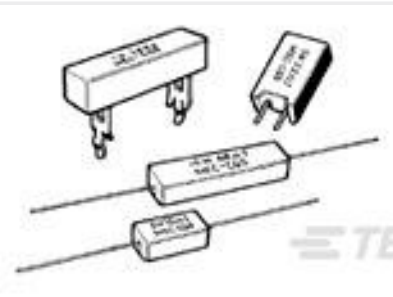

TE Part #1623785-5
SQMW10 15R 5% (WIRE)




TE Part #2420742-1
SSA Tube 2.6mm OD x 1.1mm ID x 1m L



TE Part #5749111-6
68 50SR CABLE PLUG ASSY



TE Part #1-5750913-7
68 50SR CABLE CONN KIT



TE Part #YDIV44E13-35PNV001
RECP ASSY



Documents

Product Drawings

SSA Tube 2.6mm OD x 1.1mm ID x 10m L

English

Datasheets & Catalog Pages

performance-materials-brochure

English

Datasheet - Conductive Elastomers

English

Product Specifications

Application Specification

English