
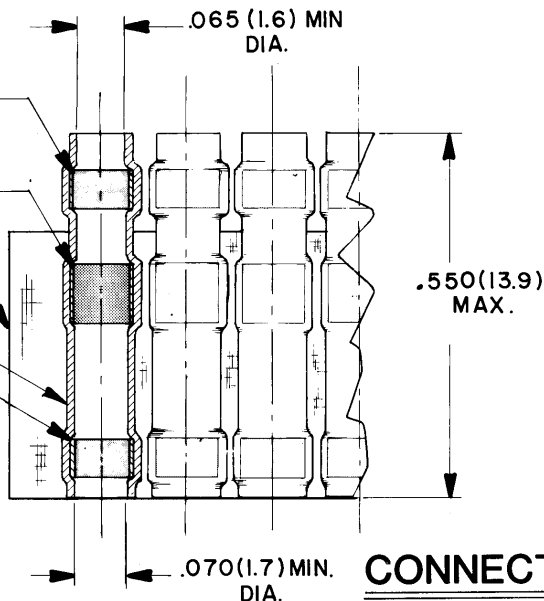


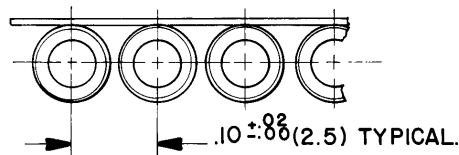

NOTES:

1. MATERIALS

- I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- I-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: Sb5 SRAP PER QQ-S-571.
- I-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC
- I-D CARRIER STRIP; ADHESIVE COATED HIGH TEMPERATURE TAPE.

2. A CTA-0027 ASSEMBLY CONSISTS OF 20 EACH CTA-0025 SOLDER SLEEVE WIRE TERMINATORS.

3. THESE SLEEVES ARE DESIGNED TO ATTACH "20 THROUGH" 26 GAGE TIN PLATED OR SILVER PLATED CONDUCTORS TO TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
BRACKETED DIMENSIONS () ARE
METRIC AND TOLERANCES ARE:

.XXX: ± (M. M.)

.XX: ± (M. M.)

Δ: ±

DO NOT SCALE THIS DRAWING

REVISIONS			
ZONE	LTR	DESCRIPTION	DATE
	B	CHANGE PER DCO 00175	11/24/80

APPROVED
Blair

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

Raychem

RAYCHEM CORPORATION
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

TITLE SOLDER PAK ASSEMBLY, DOUBLE
MELTABLE INSERT - 20 SLEEVES
TEMP RATING 150°C(Sb5) MTC100 SERIES

SIZE	CODE IDENT	DWG. NO.
B	NO. 06090	CTA-0027
PROJECT	6448 - 7055	WEIGHT
		SHEET 1 OF 1