

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECR-24-203079	14MAY2024	MV	CO

D

C

B


A

D


C

B


A

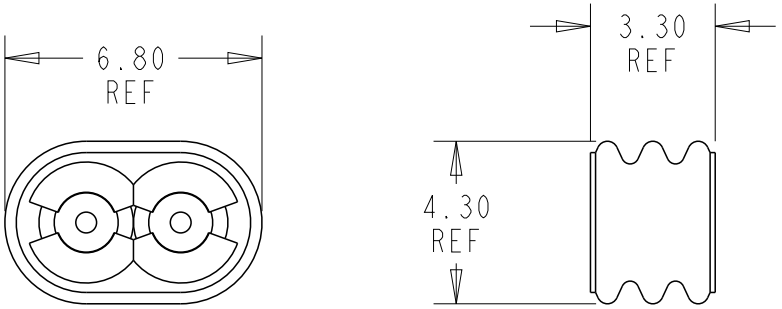


1:2 POSITION




2443732-2

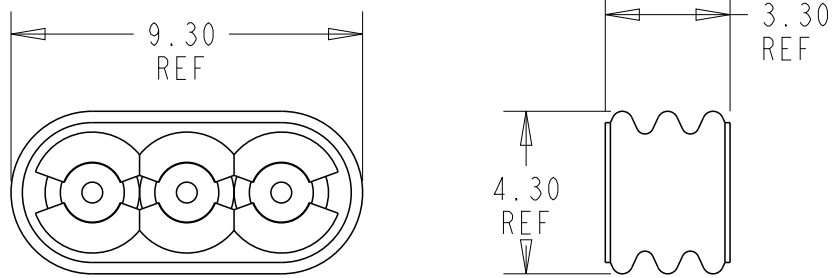


1:3 POSITION

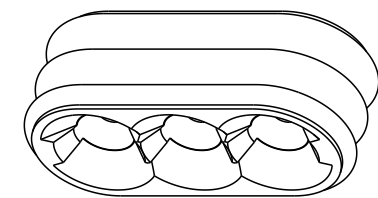


2443732-3

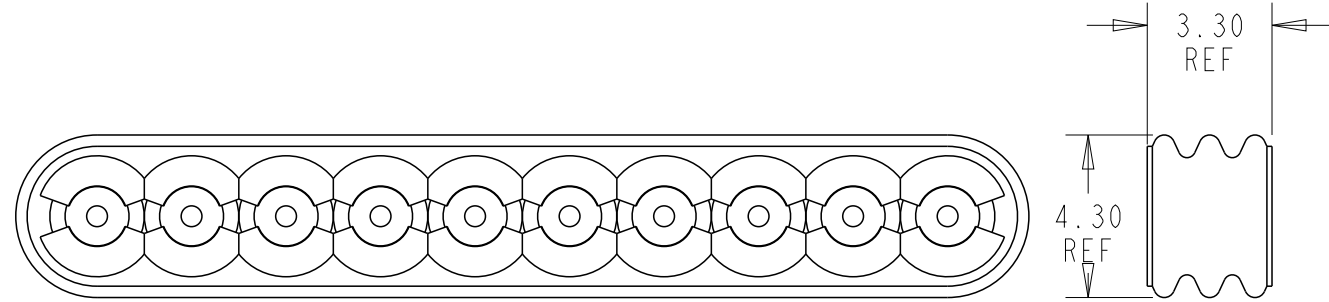


1:10 POSITION

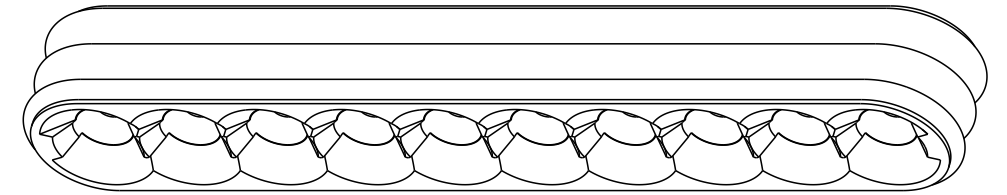


1-2443732-0

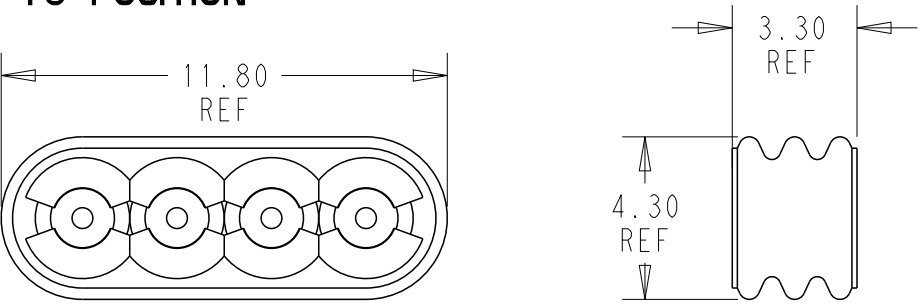


1:4 POSITION

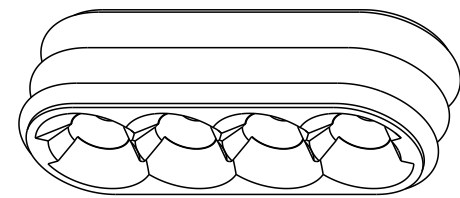


2443732-4

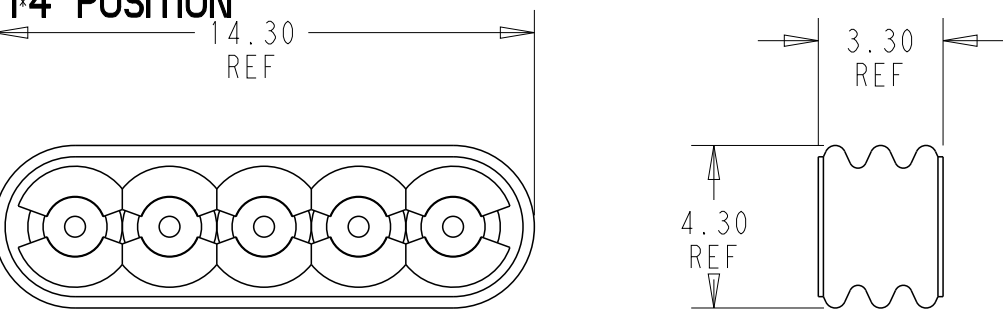


1:5 POSITION

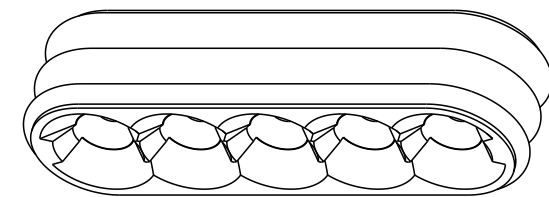


2443732-5

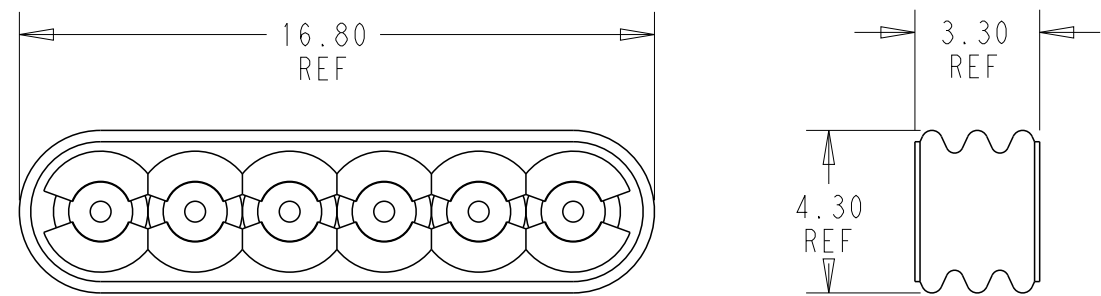


1:6 POSITION

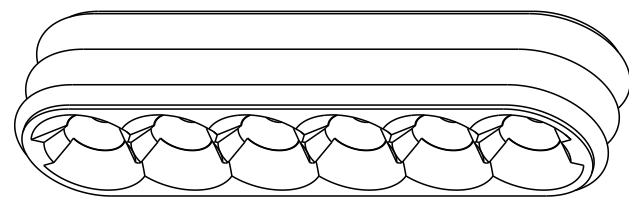


2443732-6

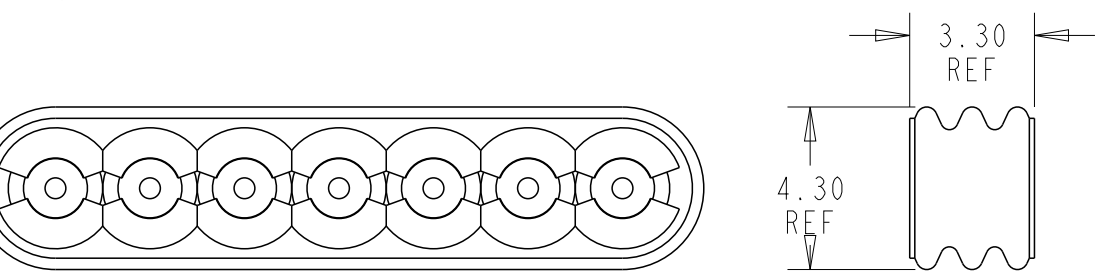


1:7 POSITION

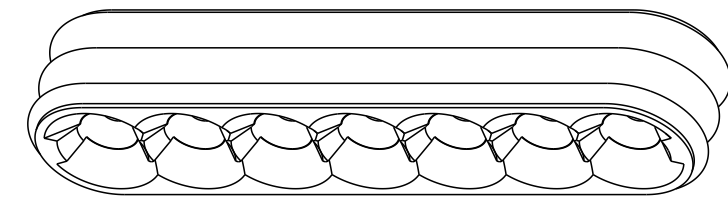


2443732-7

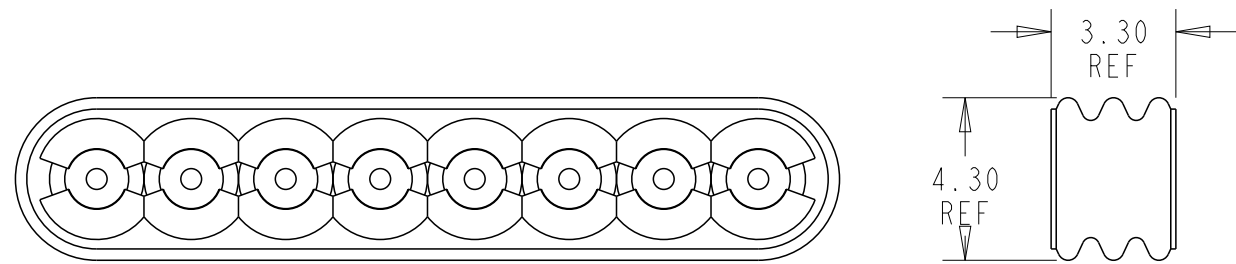


1:8 POSITION

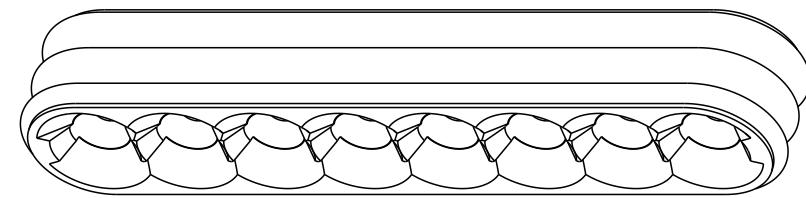

2443732-8

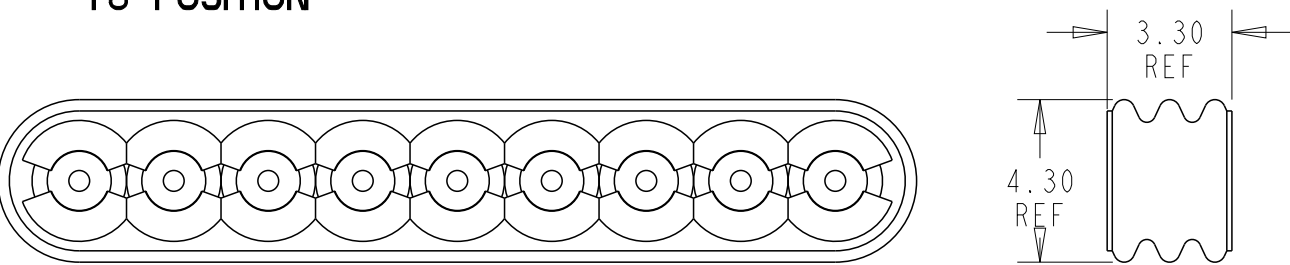

1:9 POSITION

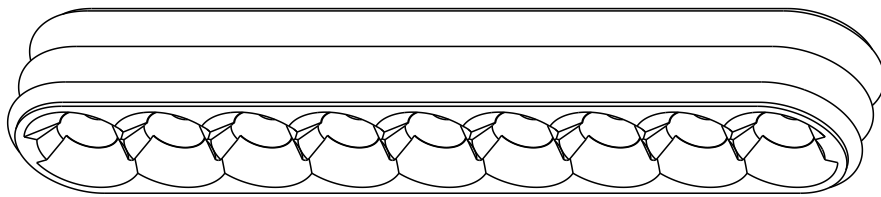

2443732-9

- 1 MATERIAL: SILICONE RUBBER, INHERENTLY LUBRICATED
COLOR: YELLOW
2. FOR USE WITH 26 TO 22 AWG WIRE, INSULATION DIAMETER 0.90-1.30mm
3. MATING CONNECTOR P/N'S:
CAP HSG - 2443725-*/2443727-*
PLUG HSG - 2443729-*
- 4 NOTE DELETED.

1*10	1-2443732-0
1*9	2443732-9
1*8	2443732-8
1*7	2443732-7
1*6	2443732-6
1*5	2443732-5
1*4	2443732-4
1*3	2443732-3
1*2	2443732-2
POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 13DEC2022 CHK 13DEC2022 APVD 13DEC2022	TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH -	REAR GANG SEAL, SDL 2.5 WATERPROOF			
MATERIAL		1	PRODUCT SPEC 108-143069	SIZE A2	CAGE CODE 00779	DRAWING NO C-2443732
			APPLICATION SPEC 114-143067	RESTRICTED TO -	SCALE 5:1	
			WEIGHT -	SHEET 1 OF 1		REV A1
			CUSTOMER DRAWING			