



Connectors > Contacts > Connector Contacts



Contact Type: **Tab**
Contact Mating Area Plating Material: **Gold (Au)**
Wire Contact Termination Area Plating Material: **Nickel**
Operating Voltage: **250 VDC, 600 VDC**

Features

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Operating Voltage	250 VDC, 600 VDC
-------------------	------------------

Contact Features

Contact Shape & Form	Rectangular
Barrel Type	Open
Contact Length	25.3 mm[.996 in]
Contact Type	Tab
Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Nickel
Contact Retention Within Housing	With
Contact Base Material	Copper Alloy



Contact Current Rating (Max)	10 A
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Contact Retention Type Within Housing	Locking Lance
---------------------------------------	---------------

Dimensions

Wire Size	24 – 20 AWG
Compatible Insulation Diameter Range	1.2 – 2.6 mm[.047 – .102 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Wire Range Mark	M
-----------------	---

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

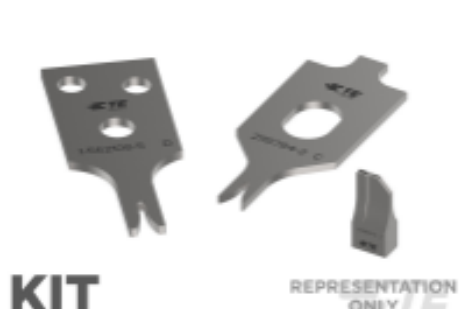

KIT

TE Part # 7-2151080-7
[OCEAN_2.0_SPARE_PART_KIT-062F110F](#)



TE Part # 2151080-1
[OCEAN_2.0_APPLICATOR-S-062F110F-RSM](#)



TE Part # CAT-H3399-H648
[HDC HMN Modular System, Rail Compliant](#)



TE Part # 2151080-2
[OCEAN_2.0_APPLICATOR-S-062F110F-RSA](#)

Also in the Series | **HDC HD**




[Connector Contacts\(24\)](#)



[Insertion & Extraction Tools\(5\)](#)



[Power Contacts\(24\)](#)

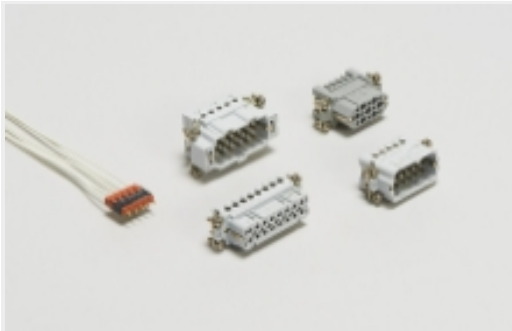


[Rectangular Contact Inserts\(40\)](#)

Customers Also Bought



TE Part #DT06-2S-CE05
[PLG, 2P, BLK, E, SEAL RET, CAP](#)

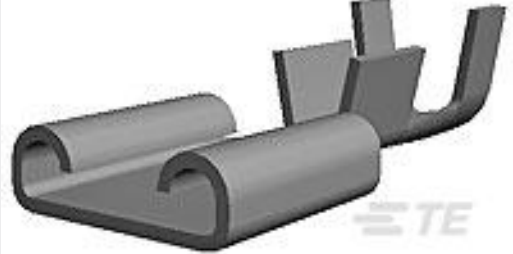

TE Part #42025-1
[250 FASTON REC 18-14 AWG TPBZ](#)



TE Part #176274-1
[AMP UNIVERSAL POWER PLUG 6P](#)



TE Part #176276-1
[AMP UNIVERSAL POWER PLUG 9P](#)



Documents

Product Drawings

HD3 TAB CONTACT AU0.38 M SIZE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2316815-2_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2316815-2_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2316815-2_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

HEAVY DUTY CONNECTORS

English

HEAVY DUTY CONNECTORS

Japanese

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English