



WeatherStation® Multisensor – Ultrasonic Instruments for Stationary Platforms

A Compact, Rugged Instrument
for Informed Decision-Making

110WX Multisensor

The WeatherStation®110WX is designed for stationary and deployable weather-monitoring applications. The 110WX provides wind speed and direction, air temperature, and barometric pressure readings. Feature rich and contained in a IPX6-rated*, compact, durable housing, the 110WX is the right component for effective weather data gathering at any site. The 110WX has no moving parts making it trouble-free and insuring a long life of reliability and performance.



Applications:

- Stationary weather monitoring stations
- Agricultural stations
- Construction site monitoring
- Deployable stations



Ultrasonic Wind Measurement

Apparent wind speed and angle with no moving parts



Barometric Pressure

Accurate atmospheric pressure measurement



Air Temperature

With calculated dew point, wind chill and heat index when RH module is installed



Relative Humidity (optional)

Field serviceable RH sensor with calculated dew point

*IPX4 with RH module installed

SPECIFICATIONS

Wind Speed

Range: 0 to 40 m/s (0 to 89 MPH)
Accuracy: 2 knots RMS @ 20 knots
Resolution: 0.1 m/s
Calculations: User configurable damping

Wind Direction

Range: 0° to 359.9°
Accuracy: 2.5° RMS @ 20 knots
Resolution: 0.1°
Calculations: User configurable damping

Air Temperature

Range: -40° to 80°C (-40 to 176°F)
Accuracy: ±1.1°C at 20°C
Resolution: 0.1°C

Relative Humidity (optional)

Range: 0 to 100% RH
Accuracy: ±3% RH at 0 to 90% RH at 20°C
Resolution: 0.1% RH

Barometric Pressure

Range: 300 to 1100 hPa
Accuracy: ±1 hPa at 25°C
Resolution: 0.1 hPa

Operating Temperature Range: -25 to 55°C (-13 to 131°F)

Operating Voltage

Supply Voltage: 9 VDC to 40 VDC
Supply Current (at 12 VDC): <50mA (<0.6 W)
NMEA 2000® Load Equivalency Number (LEN): 1


Weight

275 grams (0.6 lbs)

Mounting-thread Size, Base M39: Adapter on cable is standard 1"-14 UNS (3/4" NPT optional)

Certifications and Standards: CE, IPX6 (IPX4 with optional Relative Humidity sensor), RoHS, IEC61000-4-2, IEC60945, IEC60950_1C, IEC60950_22A, EN55022, EN55024, EN14982

DIMENSIONS

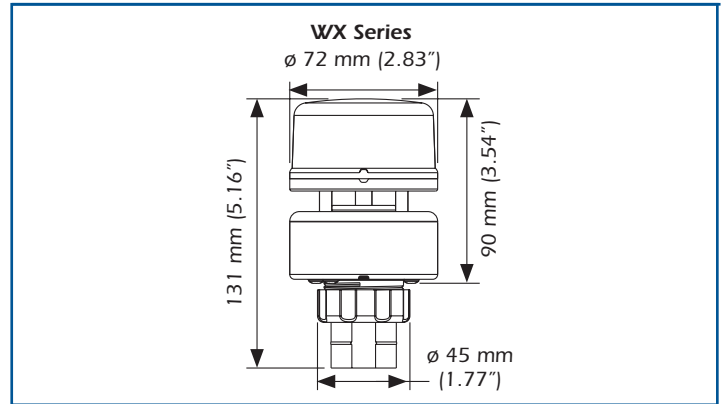

COMMUNICATIONS

Hardware Interfaces: Serial RS232, Serial RS422, CAN

Data Protocols: Serial – NMEA 0183, CAN – NMEA 2000

Serial Data Transmission Code: ASCII

Serial Output Rate: 1 Hz typical. User selectable. 10 Hz max recommended

PART NUMBERS

110WX: 44-820-1-01, RH, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)

110WX: 44-823-1-01, NMEA 0183 (RS422) and NMEA 2000® (CAN Bus)

110WX: 44-843-1-01, RH, NMEA 0183 (RS232) and NMEA 2000® (CAN Bus)

110WX: 44-860-1-01, NMEA 0183 (RS232) and NMEA 2000® (CAN Bus)

Cables sold separately unless otherwise specified

RH = Relative Humidity



©2025 AIRMAR Technology Corporation 110WX_Land_rE 09/04/25
As AIRMAR constantly improves its products, all specifications are subject to change without notice. All AIRMAR products are designed to provide high levels of accuracy and reliability, however they should only be used as aids to navigation and not as a replacement for traditional navigation aids and techniques. WeatherStation® is a registered trademark of AIRMAR Technology Corporation. AMPHENOL is a registered trademark of Amphenol Corporation. Other company or product names mentioned in this document may be trademarks or registered trademarks of their respective companies, which are not affiliated with AIRMAR.

