

RFPC-MMCX04-F : MMCX Straight Jack, Surface Mount Type

Material and Plating:

Insulator: PTFE

Pin: Be Cu, Gold

Body: Brass, Gold




Specification:

Durability: 500 Mating Cycles Min.


Operating Temperature: -40°C~+125°C

Working Frequency Range: DC~6GHz

Impedance: 50 Ohm.

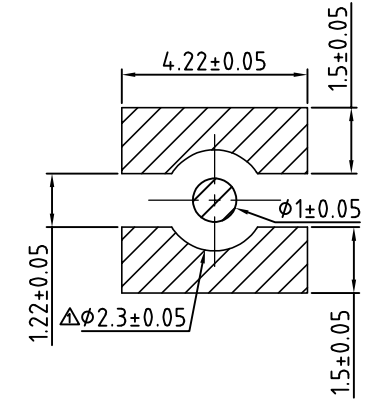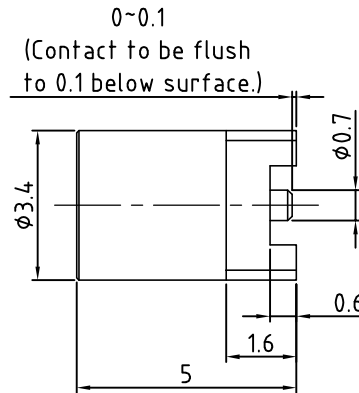

Recommended PCB SMT Layout

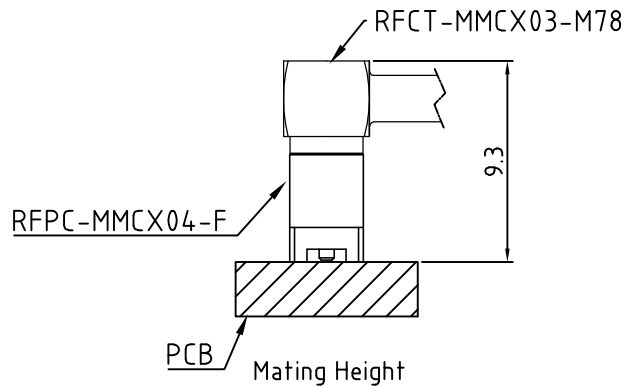

HOW TO ORDER
RFPC-MMCX04-F-X

PACKAGING OPTIONS:

T = TRAY

R = TAPE & REEL + CAP (1,500PCS/REEL)




REV. DATE & DRN
11 24/02/20 - NYW RELEASE
12 27/07/20 - NYW ADD MATING HEIGHT DIAGRAM
13 27/07/20 - NYW ADD OPERATING TEMP.
14 27/07/21 - NYW ADD END DIMENSION
15 14/02/23 - NYW ADD IMPEDANCE
16 09/05/25 - NYW ADD GCT LOGO

Scale: NTS	THIRD ANGLE	Unstated Tolerances:	Material
Drawn: NYW		.X ±0.2	SEE NOTE
App'd: XXX	Title JACK	.XX ±0.2	NOT TO SCALE
Date: 9 MAY '25	Revision: 1.5	.XXX ±0.2	Unit: mm
		ANGLES ±5	

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE
COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: RFPC-MMCX04-F
RFPC-MMCX04-F
Drawing Number:
Sheet 1 of 2
Drawing © E and O E

RFPC-MMCX04-F : TAPE AND REEL PACKAGING DRAWING

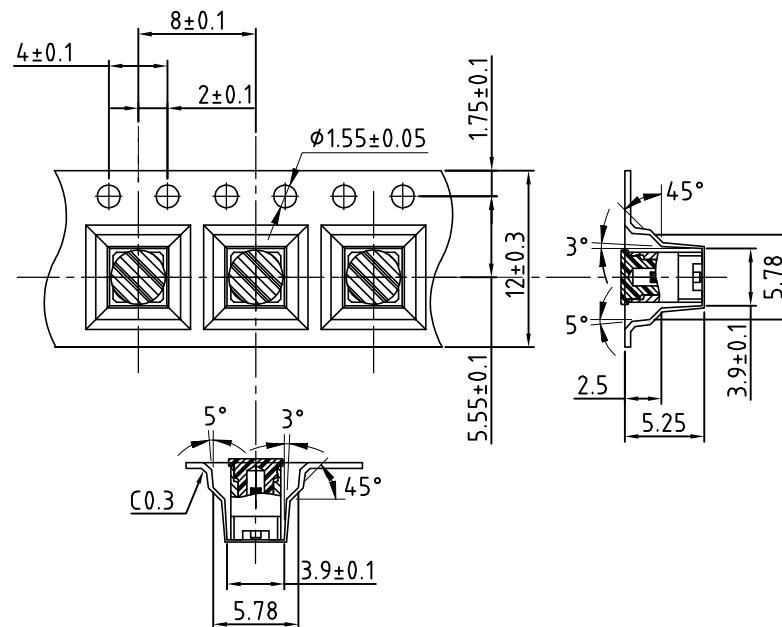

Notes:

1. Reel Diameter: 33cm
2. Unit Per Reel: 1,500pcs.
3. Insulator Cap Material: Polyamide Resin.


Scale: NTS

Drawn: NYW

App'd: XXX

Date: 9 MAY '25

THIRD ANGLE



Title JACK

Revision: 1.1

Unstated Tolerances:
.X ±0.2
.XX ±0.2
.XXX ±0.2
ANGLES ±5

Material
SEE NOTE

NOT TO SCALE

Unit: mm



www.gct.co

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE
COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: RFPC-MMCX04-F

RFPC-MMCX04-F

Drawing Number:

Sheet 2 of 2

Drawing © E and O E