
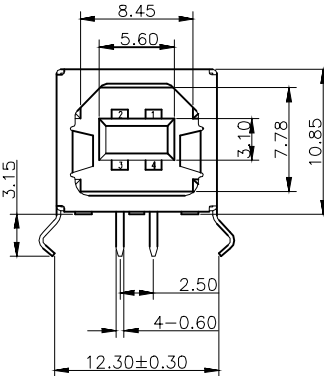

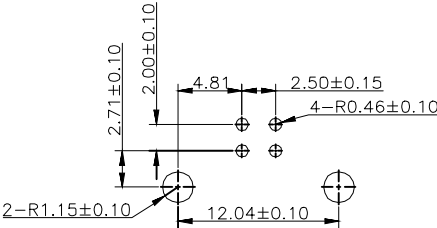


	1	2	3	4	5	6	7	
A	② <u>USB2.0 COMPLIANT</u>							A
B	    RECOMMENDED P.C.B LAYOUT NOTES: 1.Material: 1.1 Housing: PBT+30%GF UL94V-0, Color White 1.2 Shell: Brass 1.3 Contact :Phosphor Bronze 2. FINISH: 2.1 Contact Area: Selective 5u"Au Solder Area: Tin Plated Under: Ni Plated 3.MECHANICAL: 3.1 Mating Force:3.57kgf Max. 3.2 Unmating Force:1.02kgf Min 3.3 Durability:1500 cycles Min 4.ELECTRICAL: 4.1 Current Rating:1.5A 4.2 Dielectric Strength:500V AC FOR 1 MINUTE 4.3 Contact Resistance:30mΩ Max 4.4 Insulation Resistance:1000 MΩ Min ③ 4.5 Voltage Rating: 30VAC 5.Operating temperature: -55°C TO +85°C ③ Soldering temperature: 235°C, 5s max. 6.PACKIING: Tray							B
C								C
D								D
E								E
F								F
G								Scale Free TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 DIM TOL X.° ±5° Angle TOL UNIT mm ③ Update 13.11.2019 Carson Approved 13.11.2019 Carson ② Update 24.07.2019 Xavier ① Change the P/N AU-Y1007-R into AU-Y1007 22.01.2014 Winnie ⑥ Drawn 07.06.2013 Winnie Id. Modification Date Name ASSMANN WSWcomponents Customer-No. ASSMANN WSW-No. ① AU-Y1007 Drawing-No. ASS 5778 CO Replace rev03 SHEET
H	RoHS compliant							H
	1	2	3	4	5	6	7	

NOTES:

- Material:
 - Housing: PBT+30%GF UL94V-0, Color White
 - Shell: Brass
 - Contact :Phosphor Bronze
- FINISH:
 - Contact Area: Selective 5u"Au
 - Solder Area: Tin Plated
 - Under: Ni Plated
- MECHANICAL:
 - Mating Force:3.57kgf Max.
 - Unmating Force:1.02kgf Min
 - Durability:1500 cycles Min
- ELECTRICAL:
 - Current Rating:1.5A
 - Dielectric Strength:500V AC FOR 1 MINUTE
 - Contact Resistance:30mΩ Max
 - Insulation Resistance:1000 MΩ Min
 - Voltage Rating: 30VAC
 - Operating temperature: -55°C TO +85°C
 - Soldering temperature: 235°C, 5s max.
- PACKIING: Tray