

NanoMQS | Nano MQS

TE Internal #: 2333108-1

12 V / 24 V, 8 Position, Automotive Housing for Female Terminals,

Wire-to-Board, 1.8 mm [.07 in] Centerline, Black, Wire & Cable,

Signal, Nano MQS

View on TE.com >



Automotive Parts > Automotive Connectors > Automotive Housings











Nominal Voltage Architecture: 12 V, 24 V

Connector & Housing Type: Housing for Female Terminals

Number of Positions: 8

Sealable: No

Operating Temperature Range: -40 - 105 °C [-40 - 221 °F]

Features

Product Type Features

Nominal Voltage Architecture

Primary Product Color

Body Features

Connector Shape	Rectangular
Mixed & Hybrid Connector	No
Connector & Housing Type	Housing for Female Terminals
Sealable	No
Primary Locking Feature	Locking Lance
Connector System	Wire-to-Board
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	8
Number of Rows	1
Electrical Characteristics	

12 V, 24 V

Black



Connector & Keying Code	A
Contact Features	
Contact Size	.5mm
Contact Type	Receptacle
Mating Tab Width	.5 mm[.02 in]
Contact Current Rating (Max)	3 A
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	1.8 mm[.07 in]
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operating Temperature (Max)	105 °C[221 °F]
Operation/Application	
Circuit Application	Signal
Other	
Connector Position Assurance Capable	Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts








Also in the Series | Nano MQS



Automotive Connector Caps & Covers (2)




Automotive Connector Locks & Position Assurance(3)



Automotive Signal & Power Connector Housings(118)



Automotive Signal & Power Headers (60)

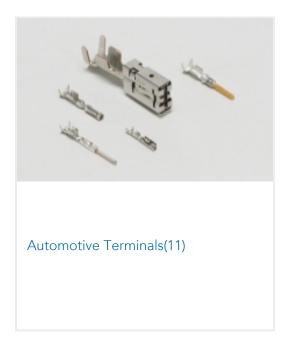

Customers Also Bought





TE Part #CAT-M8793-T273 MQS, RECEPTACLE AND TAB



TAB 2.8x0.8 CONTACT CS SWS Ag



TE Part #1418844-1 MCON 1.2 CB REC SWS SN



3POS, MCON 1.2 CB REC 2p TL SEALED



TE Part #1-1703839-1 2POS,TAB 2.8X0.8,TAB HSG,ASSY









Documents

Product Drawings

8POS,NANOMQS,REC HSG ASSY,COD A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2333108-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2333108-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2333108-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

12 V / 24 V, 8 Position, Automotive Housing for Female Terminals, Wire-to-Board, 1.8 mm [.07 in] Centerline, Black, Wire & Cable, Signal, Nano MQS



Application Specification

English