




Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

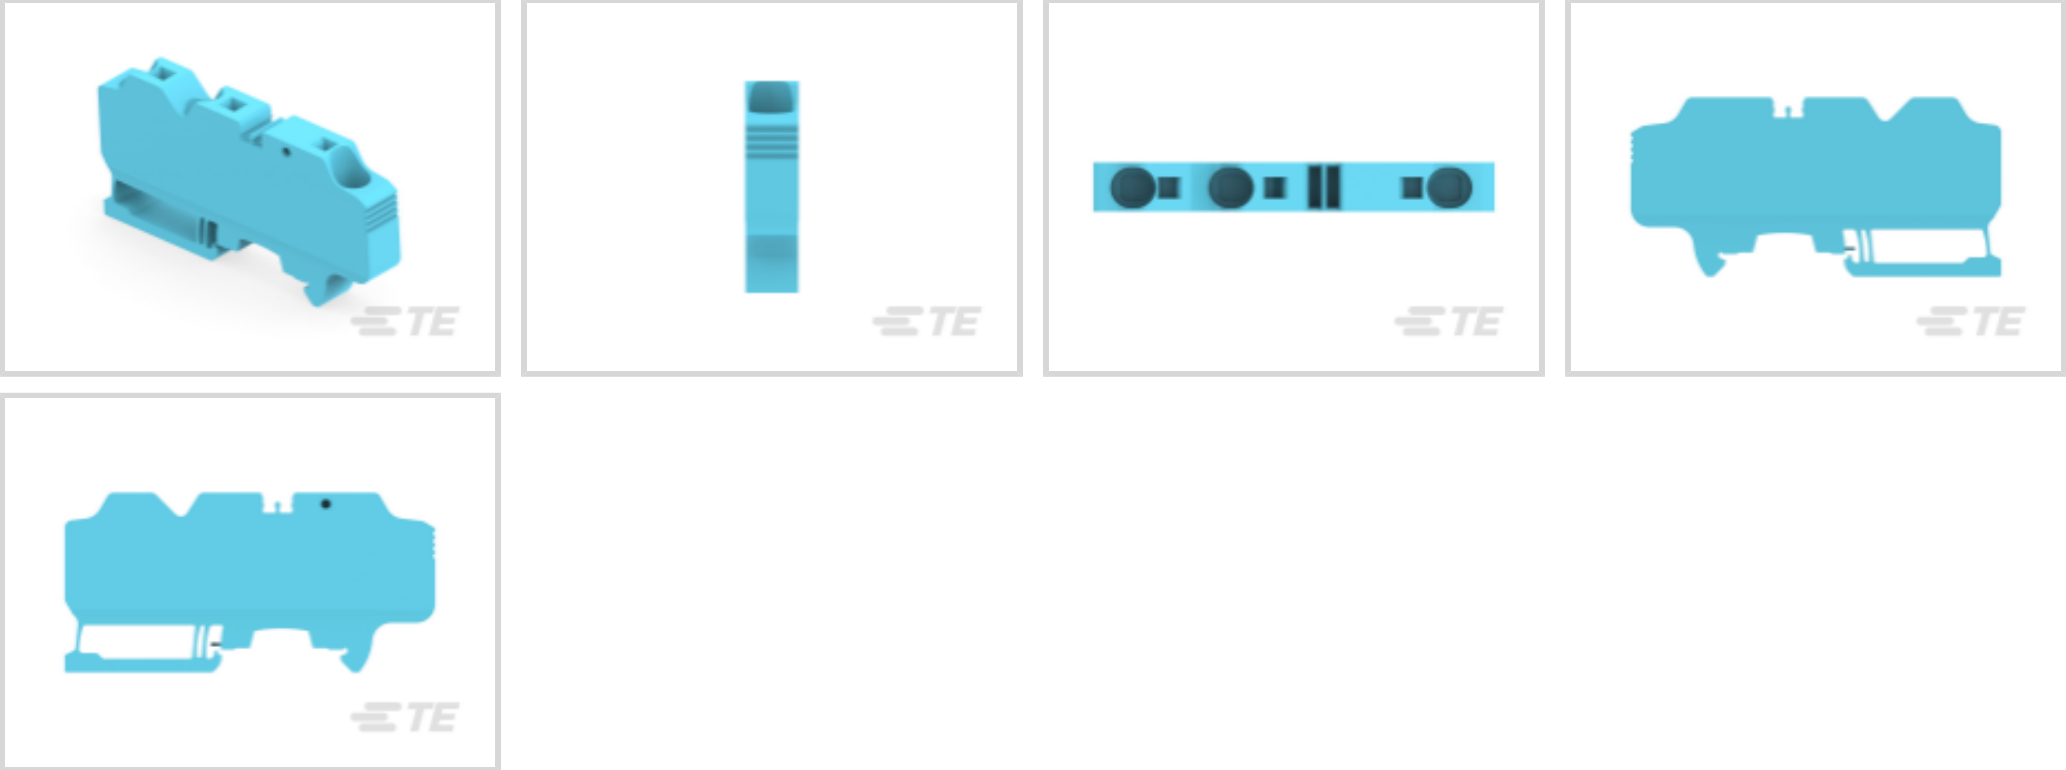

Block Function: **Feed-Through**
Modular Terminal Block Product Type: **PI-Spring Terminal Block**
Primary Product Color: **Blue Gray**
Product Spacing: **14 mm [.551 in]**
Number of Positions: **3**

Features

Product Type Features

Modular Terminal Block Product Type	PI-Spring Terminal Block
-------------------------------------	--------------------------

Configuration Features

Number of Levels	1
Gauge Type	A7 & 6.3 mm Dia.
Block Function	Feed-Through
Number of Positions	3

Electrical Characteristics

Power Loss	2.4 W
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	1000 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (IEC)	76 A
Current Rating (UL)	75 A
Current Rating (CSA)	75 A
Dielectric Withstanding Voltage (Max)	2200 V



Short-Time Withstanding Current Rating @ 1s

1920 A

Body Features

Product Weight	48.01 g[1.89 oz]
Primary Product Color	Blue Gray

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Spring Clamp	20 – 10 AWG
Product Depth	98.3 mm
Tool Size	4 mm[.157 in]
Wire Stripping Length	15 mm[.591 in]
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	20 – 4 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	20 – 6 AWG
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	20 – 6 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 – 16 mm²
Product Height	47.5 mm
Product Length	98.3 mm[3.87 in]
Product Spacing	14 mm[.551 in]

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1SNK900203R0000
TP2



TE Part # 1SNK900611R0000
UMH



TE Part # 1SNK900002R0000
BAZ1



TE Part # 1SNK900107R0000
CS-R3



TE Part # 1SNK169999R0000
MC812PA




TE Part # 1SNK900205R0000
TP4



TE Part # 1SNK160000R0000
MC812


Also in the Series | ENTRELEC SNK

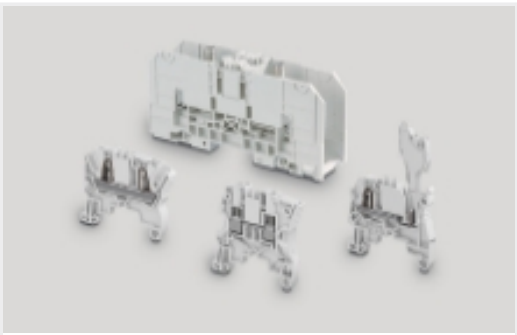

Modular Terminal Blocks(319)



Terminal Block & Strip Conducting Accessories(67)

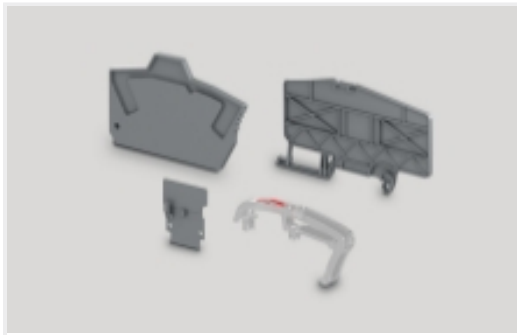


Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought



TE Part #1SNK706031R0000
ZK4-3P-OR

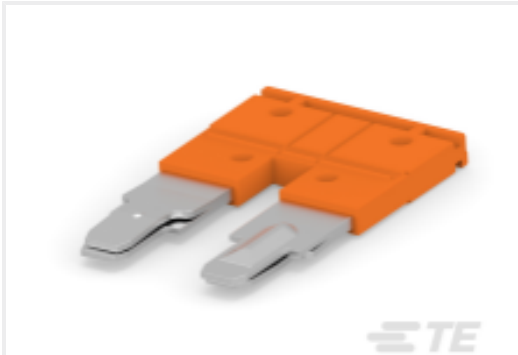

TE Part #1SNK912302R0000
JB12-2



TE Part #1SNK706021R0000
ZK4-3P-BL



TE Part #1SNK712011R0000
ZK16-3P




TE Part #1SNK706022R0000
ZK4-4P-BL



TE Part #1SNK705072R0000
ZK2.5-3P-WH



TE Part #1SNK706060R0000
ZK4-YL

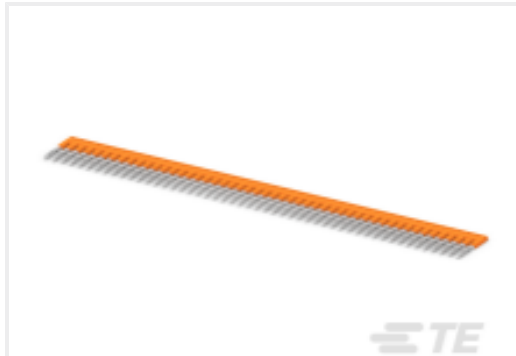

TE Part #1SNK905350R0000
JB5-50



TE Part #1SNK150000R0000
MC612



TE Part #1SNK706062R0000
ZK4-RD

Documents

CAD Files

Customer View Model

[ENG_CVM_CVM_1SNK712067R0000_A2.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNK712067R0000_A2.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNK712067R0000_A2.2d_dxf.zip](#)

1SNK712067R0000

PI-Spring Terminal Block, Feed-Through, Blue Gray, 14 mm [.551 in] Spacing, 3 Position, DIN Rail, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ZK16-3P-PV-BL

English

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

SNK SERIES TERMINAL BLOCKS

English

Agency Approvals

UL

English