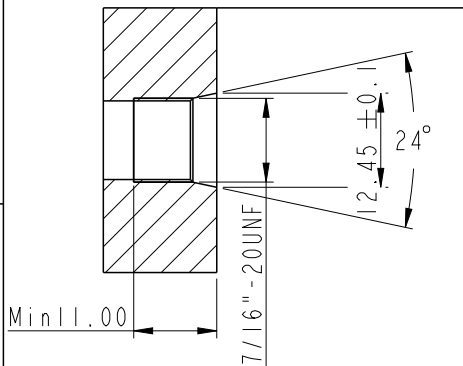
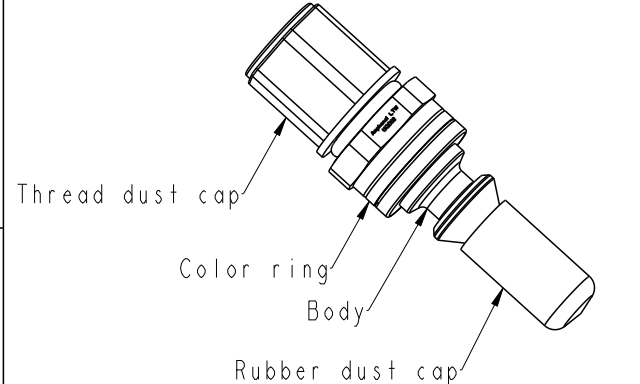
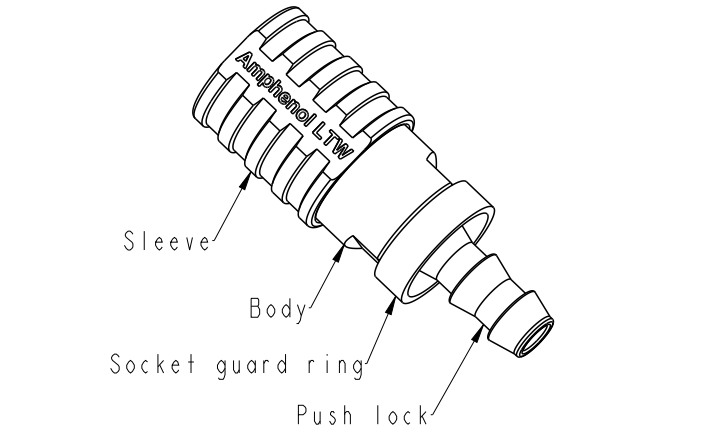
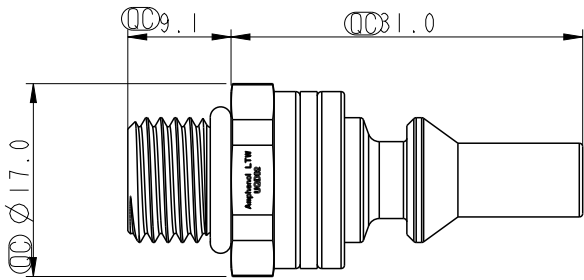
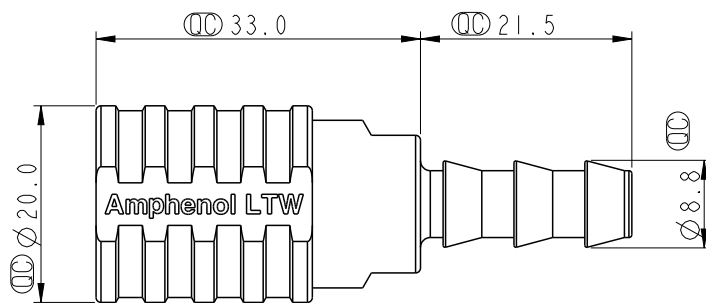



F					REV.	ECN NO.	DATE	SIGN	DESCRIPTION																										
					A		2025/01/07	Zed Tseng	Rev.01 to Rev.A																										
					B	C250657	2025/05/23	Zed Tseng	⚠ XI																										
E		Recommended Panel Cut-Out																																	
D																																			
					SQD02-SBBN-PADM-XX001 BE:Blue RD:Red																														
C					⚠ Note: * ROHS compliant * Ⓞ Important dimension * Plug Connection Type: 7/16"-20 UNF Thread Color ring: Plastic, Red or Blue Rubber dust cap: Thermoplastic, Black Threadust cap:Thermoplastic, Yellow Weight: Ref.22.5 G/ PCS * Socket Connection type: 1/4"-Push-lok hose barb Sleeve color: Aluminum, Red or blue Socket guard ring: Thermoplastic, Yellow Weight: Ref.48.5 G/ PCS * Body Material: Stainless steel * O-ring:Rubber, Black * Nominal Diameter: DN3																														
B	Plug		Socket																																
A	UNIT:mm				TITLE		ACC, UQD, SIZE 02, SOCKET,PLUG		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY		DATE																				
	TOLERANCE		±0.5		SCALE		NA				SIZE		A4		SHEET		I		OF		I		DWG NO		SOD02-SBBN-PADM-XX001		CHECKED BY		Vic Lee		DATE		2025/05/23		
	REV.		B		WC-REV.		.0				Ⓞ:Inspection item		CUSTOMER		ALTW		APPROVED BY		Fred Lee		DATE		2025/05/23												