



200 SERIES

- Switch adjustment ranges from vacuum through 6,000 psig depending on model
- 200V & 200L: Standard Brass with NBR diaphragm wetted parts, 200H: Standard Zinc-nickel with NBR diaphragm wetted parts
- SPST or SPDT snap-action switch with solid Silver contacts

APPLICATIONS

- Hydraulics & pneumatics
- Pumps & compressors
- Tank monitoring
- Leak detection
- Water management

SPECIFICATIONS

Switching parameters	
Function	SPST or SPDT
Contact rating*	5A @ 125/250 Vac 5A @ 12/24 Vdc
Repeatability	See Chart 1 on page 111
Hysteresis	See Chart 2 on page 111
Contact material	Solid Silver, self-cleaning, optional gold-plated
Frequency	Max. 100 cycles/min
Switch type	Snap action
Pressure ranges	-5 inHg to -28 inHg (350 psig) through 1000 psig to 6,000 psig (9,000 psig)
Service life	>1,000,000 load cycles
Temperature ranges	Media -4 °F to 176 °F (-20 °C to 80 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -4 °F to 176 °F (-20 °C to 80 °C)
Proof pressure	Static = 9000 psi (620 bar) Dynamic = 7500 psi (517 bar)
Measuring element	200V: Brass, NBR diaphragm 200L: Brass, NBR diaphragm 200H: Zinc-nickel, NBR diaphragm
Housing material	200V & 200L: Brass, optional Stainless Steel 200H: Zinc-nickel plated Steel, optional Stainless Steel
Environmental rating	IP00 - Exposed Terminals IP65 - DIN EN 175301-803 Form A IP69 - M12, Flying Leads & Deutsch Integral
Weight	Approximately 0.2 lb.

* Gold contacts may be required for less than 12 VDC and 20 milliamps



WARNING: This product can expose you to chemicals including Lead and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

ORDERING INFORMATION			
SERIES	200V	200 Vacuum Series	200H 200 High Pressure Series
	200L	200 Low Pressure Series	
SWITCH FUNCTIONS	1	SPST, Normally open	3 SPDT
	2	SPST, Normally closed	
PROCESS CONNECTIONS	1	1/8" NPT male	31 9/16-18 SAE Male, Non-Adjustable
	2	1/4" NPT male	33 G 1/8B
	10	G 1/4B	45 7/16-20 SAE Male, Non-Adjustable
200V VACUUM PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)			
200L LOW PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	5/25-vac	-5 inHg to -25 inHg (350 psig)	
	3/15	3 psig to 15 psig (350 psig)	15/75 15 psig to 75 psig (350 psig)
200H HIGH PRESSURE SWITCH ADJUSTMENT RANGES (Max. working pressure)	5/30	5 psig to 30 psig (350 psig)	50/150 50 psig to 150 psig (350 psig)
	10/85	10 psig to 85 psig (9,000 psig)	500/2500 500 psig to 2,500 psig (9,000 psig)
	65/300	65 psig to 300 psig (9,000 psig)	500/3500 500 psig to 3,500 psig (9,000 psig)
ELECTRICAL CONNECTIONS†	125/600	125 psig to 600 psig (9,000 psig)	1000/6000 1,000 psig to 6,000 psig (9,000 psig)
	4	Spade Terminals (1/4 x 1/32)	98 Weatherpack Shroud, 2-Pin Female**, **
	8	DIN EN 175301-803 Form A	99 Weatherpack Shroud, 2-Pin Male**, **
OPTIONS***	34	Packard 3-Pin ††	100 Deutsch 2-Pin Male (DT04-2P)*, **
	46	Deutsch Integral 3-Pin (DT04-3P) ††	101 Deutsch 3-Pin Male (DT04-3P)*
	66	Deutsch Integral 2-Pin (DT04-2P) **	103 Deutsch 2-Pin Female Socket (DT06-2S)*, **
	69	M12 x 1 3-Pin	104 Deutsch 3-Pin Female Socket (DT06-3S)*
	77	18" Flying Leads	110 Weatherpack Tower, 3-Pin Female*
	78	6-32 Terminal Screws	111 Weatherpack Tower, 3-Pin Male*
	96	Weatherpack Tower, 2-Pin Female**, **	112 Weatherpack Shroud, 3-Pin Female*
	97	Weatherpack Tower, 2-Pin Male**, **	113 Weatherpack Shroud, 3-Pin Male*
	AU	Gold Plated Contacts	SP Factory Adjusted Switch Point
	EP	EPDM Diaphragm (-10/250 °F)	SS 316 SS Wetted Materials
	HNBR	Low Temp Nitrile Diaphragm (-40/110 °F)	VT FKM Diaphragm (0/250 °F)
	KP	Polyimide Diaphragm (-40/230 °F)	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Options attached to Flying Leads

** For SPST only

*** Not all options are available for all ranges, consult factory

† Other electrical connections available, consult the factory

†† To order this option, the switch function must be SPDT(-3)

EXAMPLE

Series200 Low Pressure Series
 Switch function..... SPST, normally open
 Process connection 1/4" NPT Male
 Adjustable range5 psig to 30 psig (350 psig)
 Electrical connection DIN EN 175301-803 Form A

200L - 1 - 2 - 5/30 - 8

Chart 1



Series	Range	Repeatability
200V	5 - 25 inHg	1 psi or 5% of setpoint
200L	3 - 15	1 psi or 5% of setpoint
	5 - 30	
	15 - 75	
	50 - 150	
200H	10 - 85	2% of full setpoint range
	65 - 300	
	125 - 600	
	500 - 2,500	
	500 - 3,500	
	1,000 - 6,000	

Chart 2

Series	Range	Hysteresis
200V	5 - 25 inHg	4-6 inHg
200L	3 - 15	2-5 psi
	5 - 30	3-7 psi
	15 - 75	4-7 psi
	50 - 150	7-15 psi
200H	10 - 85	1-10 psi
	65 - 300	8-30 psi
	125 - 600	20-80 psi
	500 - 2500	70-300 psi
	500 - 3500	75-300 psi
	1000 - 6000	150-600 psi



200V & 200L Spade Terminals

200H Spade Terminals

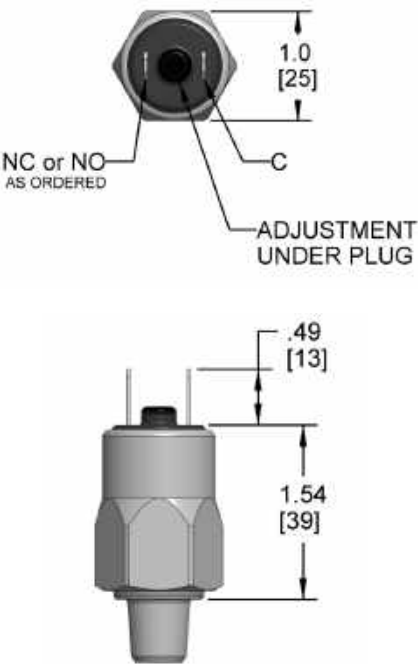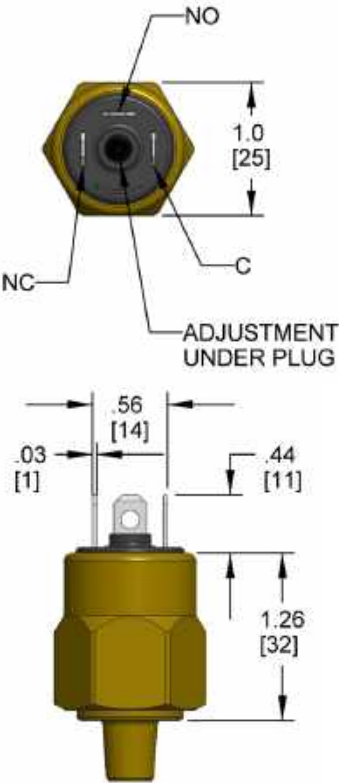



200V & 200L DIN EN 175301-803 Form A

200H DIN EN 175301-803 Form A

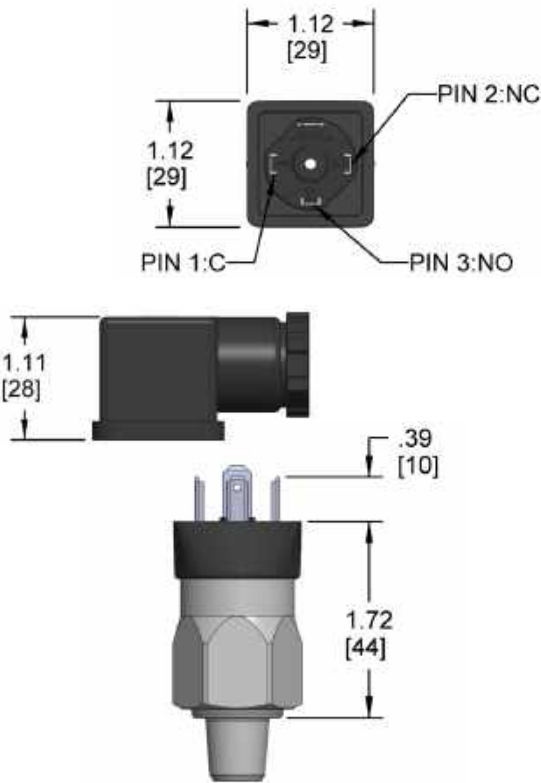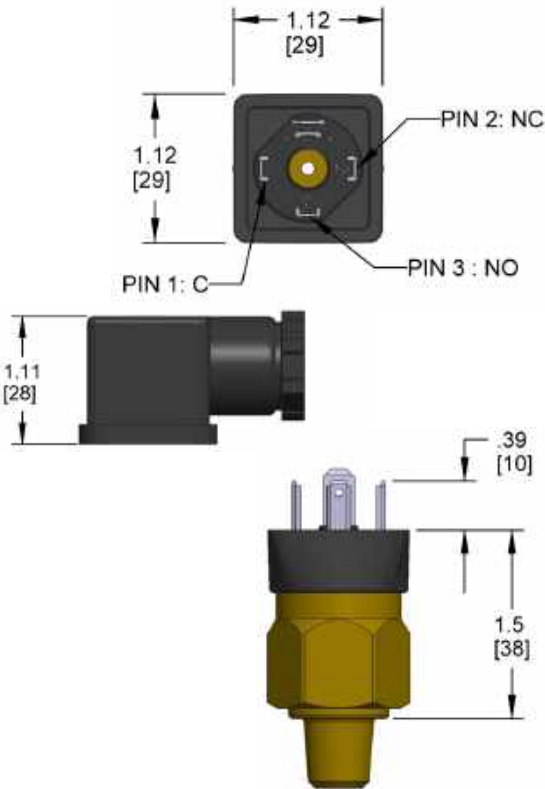



200V & 200L Packard 3-Pin

200H Packard 3-Pin

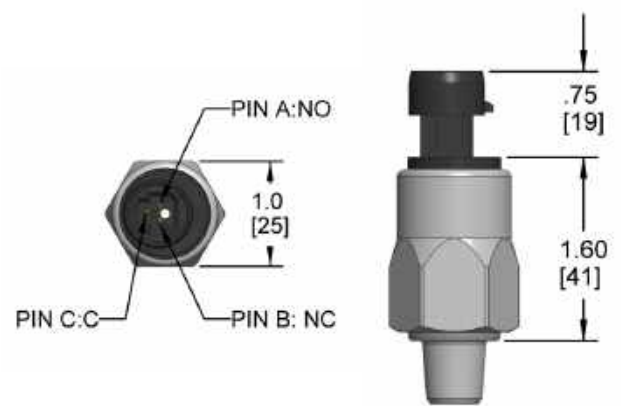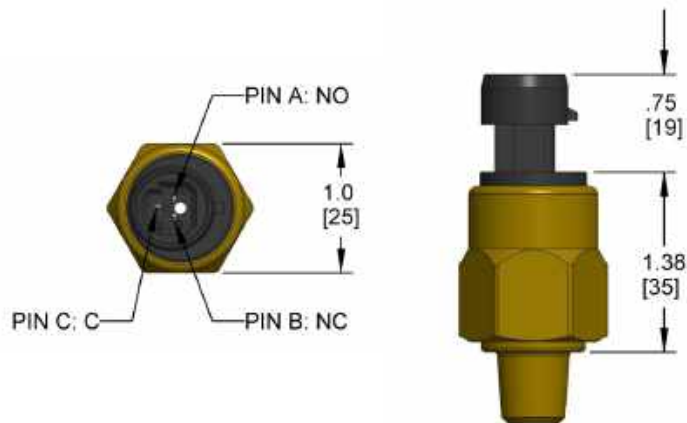





200V & 200L 2-Pin Deutsch

200H 2-Pin Deutsch

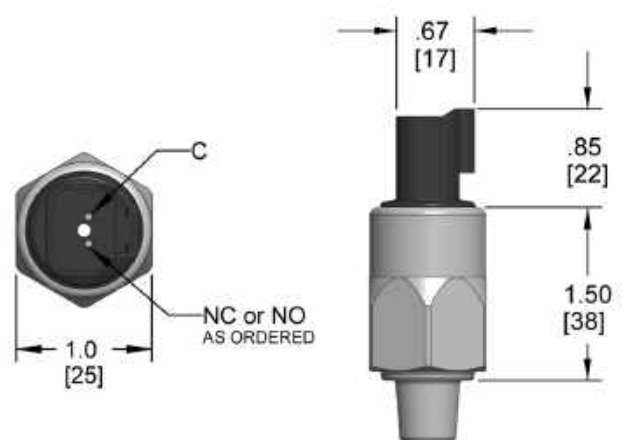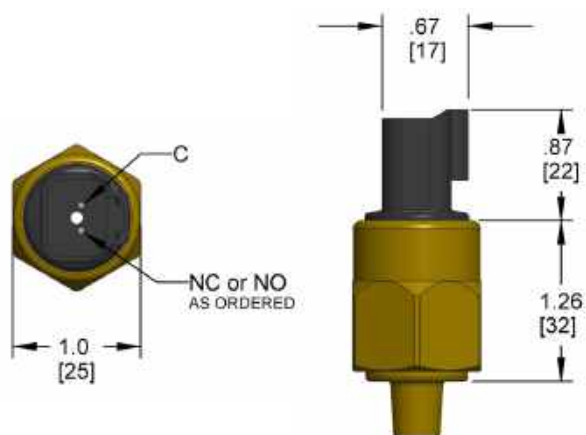



200V & 200L 3-Pin Deutsch

200H 3-Pin Deutsch

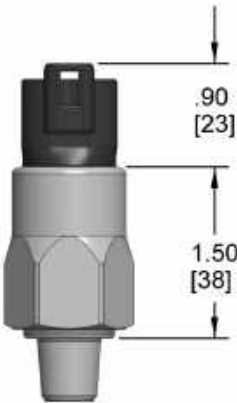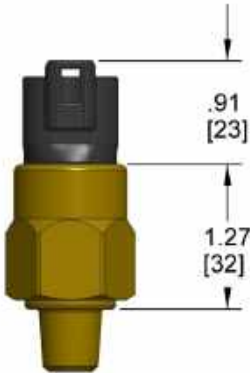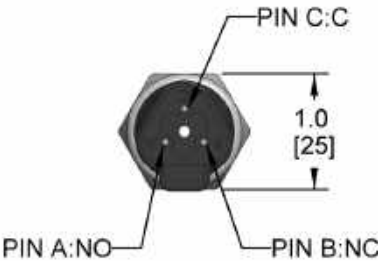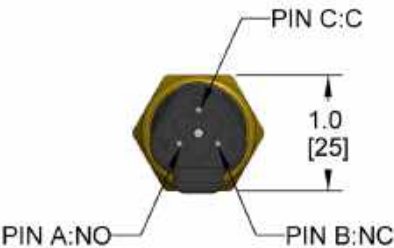


200V & 200L M12 x 1 (3-Pin)


200H M12 x 1 (3-Pin)

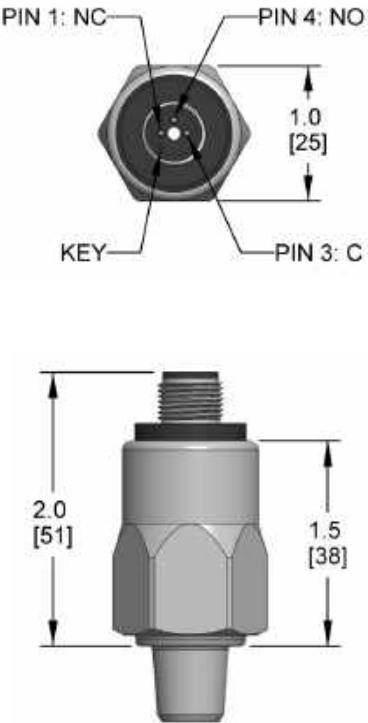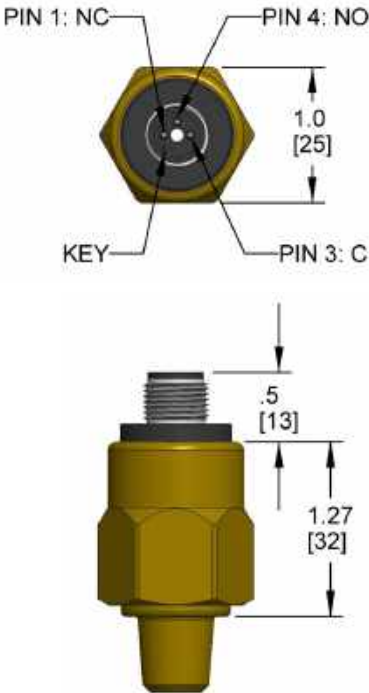

200V & 200L 18" Flying Leads

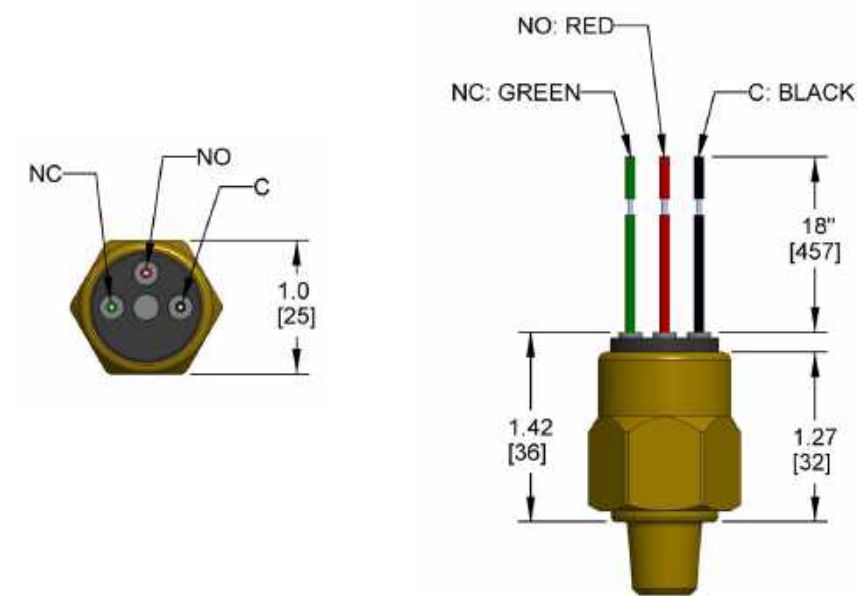

200H 18" Flying Leads

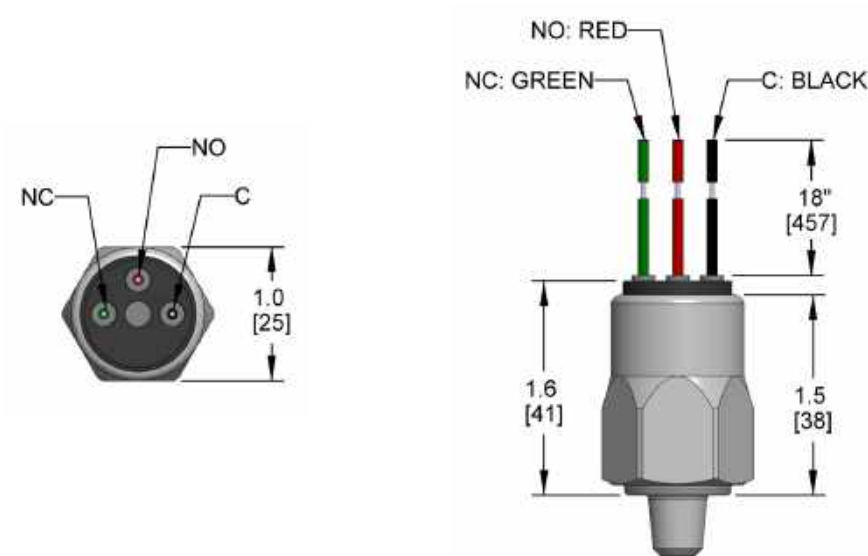

200V & 200 L Terminal Screws

200H Terminal Screws

