


Connection cable

-

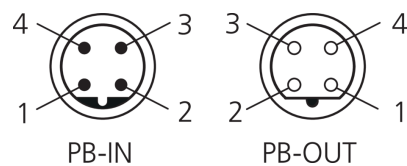

+20°C, 24 V DC

Service voltage	< 250 V AC/DC
Length	600 mm
Material of cable	Polyurethane, unshielded
Drag chain properties	> 2 Mio. (Bending cycles)
Protection class	III, operation on protective low voltage
Component	Connection cable
Design	Straight / straight
To be used for	Device plug M12, 4-pin
Drag chain compatible	Yes
Ambient temperature during operation	-5 ... +80 °C (Movable, Fixed)
Protection type	IP 67 (at tightening torque 0.6 Nm)
Connection	Connector, M12, 4-pin, A-coded
Connection 2	Socket, M12, 4-pin, A-coded
Cross-section	0.34 x 0.34 mm (4 x)

<https://www.di-soric.com/203253>