



Data Sheet | Item Number: 706-100/650-100
Connection cable; 50-pole; with solder pin; Female connector; open-ended; Length: 1 m; Conductor cross-section: 0.25 mm²
<https://www.wago.com/706-100/650-100>

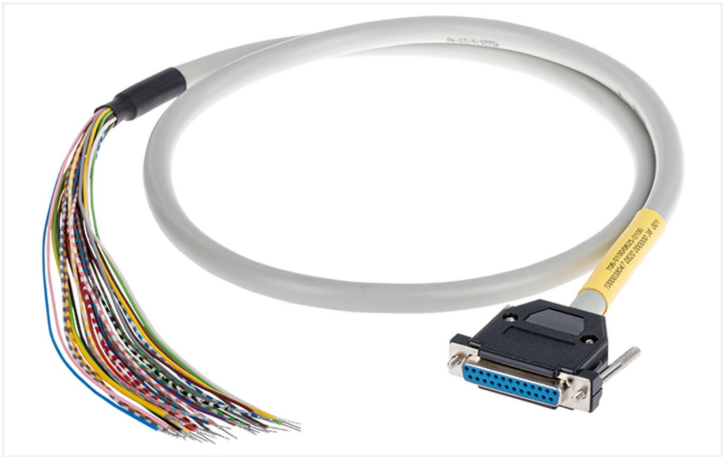

Similar to illustration

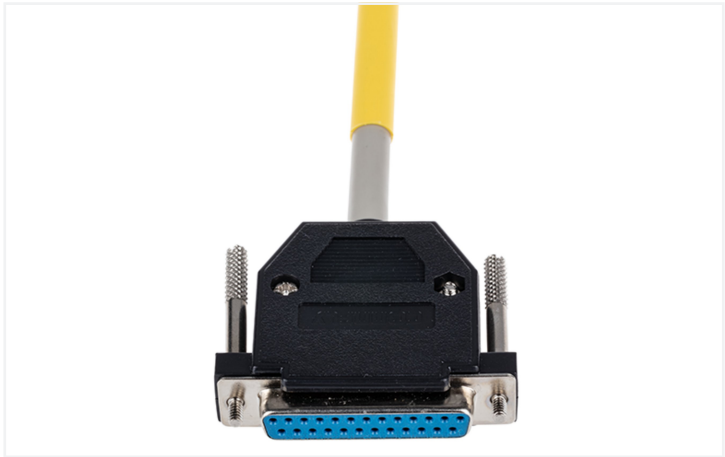

Similar to illustration

Cable color code for 50-pole (Sub-D) connector	50-pole female (Sub-D) connector Pin number
White	1
Green	2
Yellow	3
Red	4
Black	5
Blue	6
White	7
Black	8
Blue	9
White	10
Black	11
Blue	12
White	13
Black	14
Blue	15
White	16
Black	17
Blue	18
White	19
Black	20
Blue	21
White	22
Black	23
Blue	24
White	25
Black	26
Blue	27
White	28
Black	29
Blue	30
White	31
Black	32
Blue	33
White	34
Black	35
Blue	36
White	37
Black	38
Blue	39
White	40
Black	41
Blue	42
White	43
Black	44
Blue	45
White	46
Black	47
Blue	48
White	49
Black	50

Notes	
Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data	
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Connection data	
Cable type	LiYCY
Color code	per DIN VDE 47100
Connection 1	
Pluggable connector	D-subminiature female connector
Pole number 1	50
Connection type 1	System
Wire cross-section	0.25 mm²



Connection 2	
Connector 2	open-ended
Connection type	open-ended

Physical data	
Cable length	1 m

Material data	
Fire load	0 MJ
Weight	483 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
ETIM 9.0	EC001855
ETIM 8.0	EC001855
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143976572
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 706-100/650-100	