




Terminals & Splices > Quick Disconnects

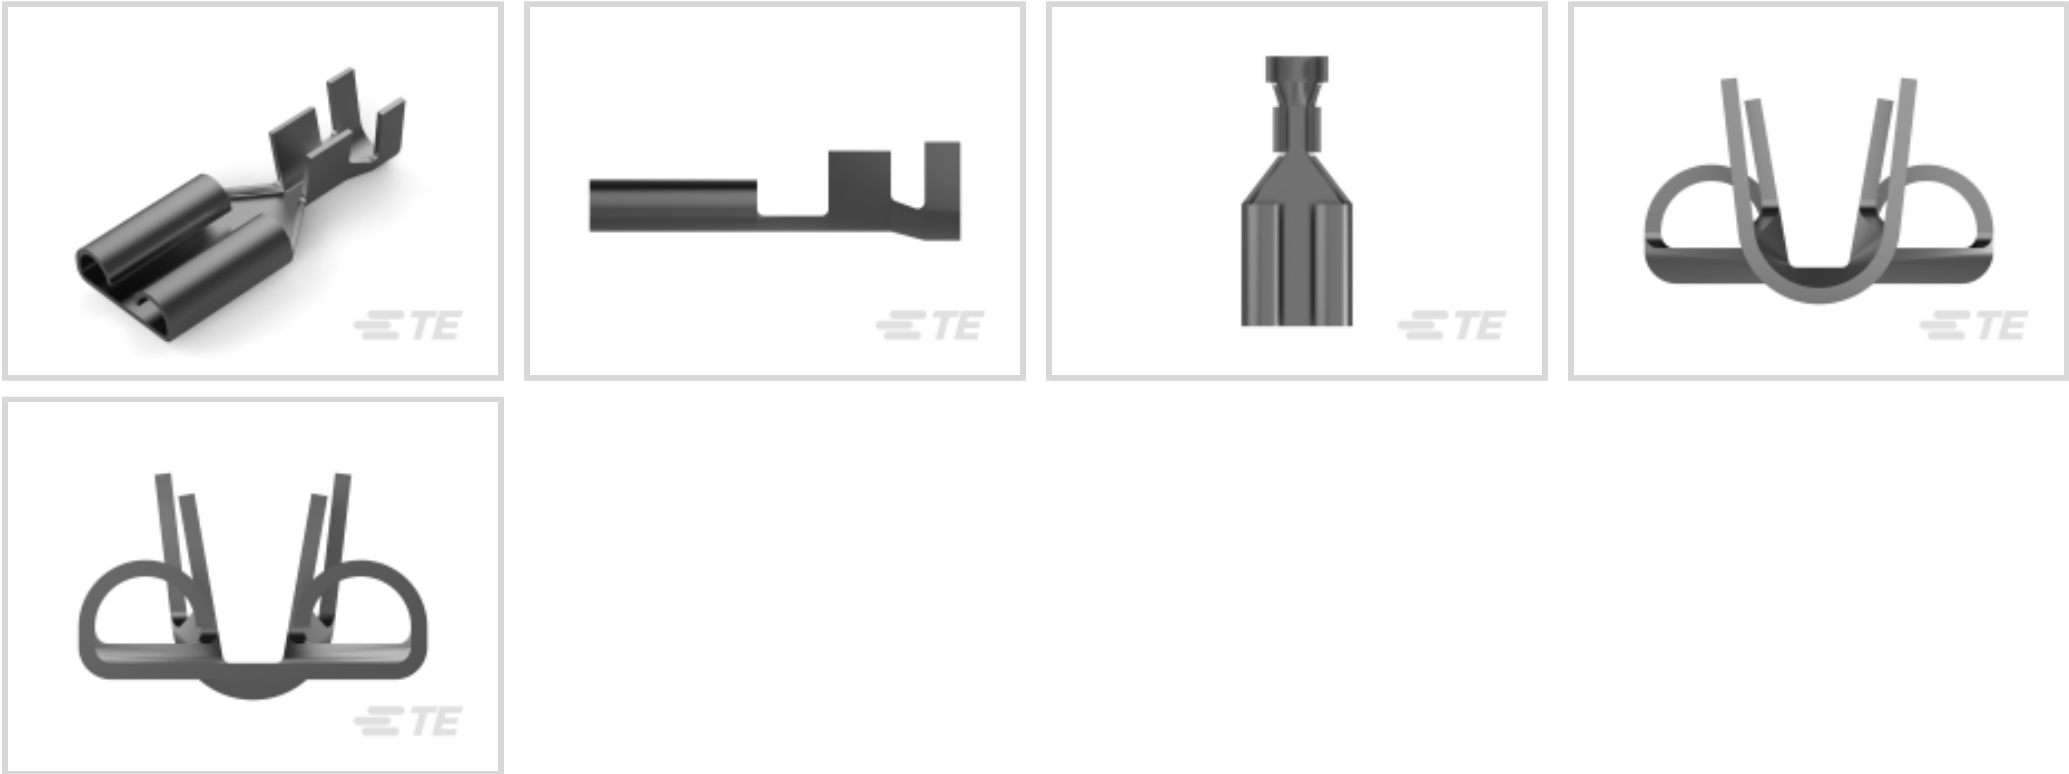

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **2.08 – 5.26 mm²**

Mating Tab Width: **9.53 mm [.375 in]**

Mating Tab Thickness: **1.22 mm [.048 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	9.53 mm[.375 in]
Mating Tab Thickness	1.22 mm[.048 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	26.42 mm[1.04 in]
Compatible Insulation Diameter Range	4.06 – 5.33 mm[.16 – .21 in]
Terminal Material Thickness	.51 mm[.02 in]
Wire Size	2.08 – 5.26 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	2000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 5-160521-2
375 FASTON REC 12-10 AWG TPBR

TE Part # 154897-2
.375 FLAG FASTON RECPT.

TE Part # 154897-1
.375 FLAG FASTON RECPT.

TE Part # 2150785-2
OCEAN-2.0-APPLICATOR-E-155F210F-REA

TE Part # 7-2150785-7
OCEAN_2.0_SPARE_PART_KIT-155F210F

Also in the Series | FASTON 375

Crimp Terminal Housings(2)


PCB Terminals(1)

Quick Disconnects(10)


Customers Also Bought



TE Part #63481-1
RCPT STATOR 21-15 0173PTPBR

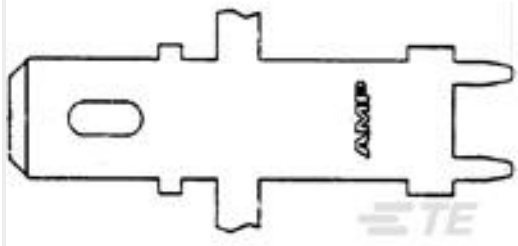


TE Part #63949-1
250 FASTON TAB TPBR

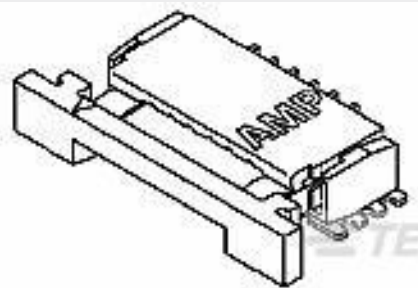

TE Part #84952-4
1MM FPC HORZ.BTTM CONT.ASS.4P




TE Part #280223-2
FASTON 375 ASY REC 4-6MM2 0.5X27.0 TPBR

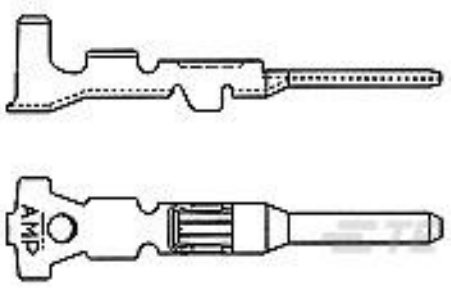

TE Part #282465-1
MINI MIC TAB CONTACT >1,5-



TE Part #881623-2
187 FASTON REC 20-17 AWG TPBR

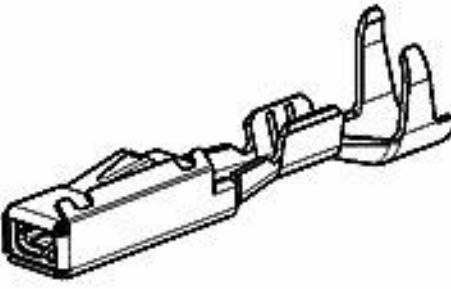

TE Part #1355556-1
MQS1,5 Sn rec LL unseal. 0,35-0,5



TE Part #2317070-1
SLIDE,PIN HSG ASSY



TE Part #2374900-2
GEMnet HDR, ASSY, 4P, 90deg,COD B

Documents

Product Drawings
FASTON 375 AM REC 2-6MM2 0.2X1.062 BR
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_150530-1_AB.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_150530-1_AB.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_150530-1_AB.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



EB**General Application Specification for Open Barrel Terminals

English

Application Specification

English