

SIM Connectors

TE Internal #: 2199337-5

3FF SIM, Push-Pull Type, 8 Position, 8 Loaded Positions, Signal, -30

– 85 °C [-22 – 185 °F], SIM Connectors, SIM Card Connectors

View on TE.com >



Connectors > PCB Connectors > Memory Card Connectors > SIM Card Connectors











Compatible Card: 3FF SIM

SIM Card Product Type: Push-Pull Type

Number of Positions: 8

Number of Loaded Positions: 8

Contact Current Rating (Max): 1 A

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Card Stop	With
Compatible Card	3FF SIM
SIM Card Product Type	Push-Pull Type

Configuration Features

Card Detection Switch	With
Card Insertion Style	Normal Insertion
Number of Positions	8
Number of Loaded Positions	8

Body Features

Primary Product Color	Black
Ejector Type	Push-Pull

Contact Features

Contact Base Material	Copper Alloy
-----------------------	--------------



Contact Mating Retention	Without
Contact Current Rating (Max)	1 A
Termination Features	
Termination Method to PCB	Surface Mount
Mechanical Attachment	
Connector Mounting Type	Board Mount
Mating Alignment	With
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Profile Height from PCB	1.18 mm[.046 in]
Usage Conditions	
Usage Conditions Operating Temperature Range	-30 – 85 °C[-22 – 185 °F]
	-30 – 85 °C[-22 – 185 °F]
Operating Temperature Range	-30 – 85 °C[-22 – 185 °F] 5000 Cycles
Operating Temperature Range Operation/Application	
Operating Temperature Range Operation/Application Durability Rating	5000 Cycles
Operating Temperature Range Operation/Application Durability Rating Circuit Application	5000 Cycles
Operating Temperature Range Operation/Application Durability Rating Circuit Application Industry Standards	5000 Cycles Signal
Operating Temperature Range Operation/Application Durability Rating Circuit Application Industry Standards UL Flammability Rating	5000 Cycles Signal

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC



Halogen Content	Low Bromine/Chlorine - Br and Cl < 900
	ppm per homogenous material. Also BFR /CFR/PVC Free

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts





Also in the Series | SIM Connectors

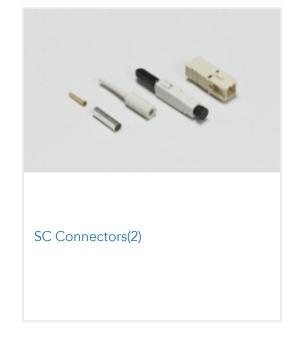


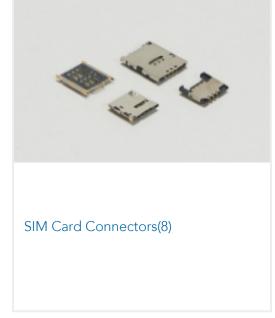

Customers Also Bought





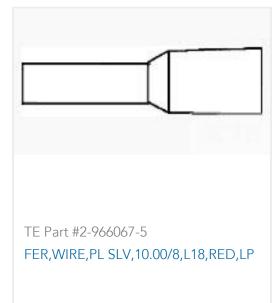

















Documents

Product Drawings

ASS'Y FOR MICRO SIM H1.18 8POS (EMBOSS)

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2199337-5_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2199337-5_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2199337-5_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

3FF SIM, Push-Pull Type, 8 Position, 8 Loaded Positions, Signal, -30 – 85 °C [-22 – 185 ° F], SIM Connectors, SIM Card Connectors



Product Specification

English

Product Specification

English