



SPLICE

TE Internal #: 61299-2
Pigtail Splice / Thru Splice, 7000 – 12000 CMA, Uninsulated,
Serrated, Brass, 3 Serration, 6.8 mm [.267 in] Length, Reel, Open
Barrel, SPLICE

[View on TE.com >](#)

Terminals & Splices > Splices



Splice Type: **Pigtail Splice, Thru Splice**
Sealable: **No**
Splice Features: **Serrated**
Wire Size: **7000 – 12000 CMA**
Contact Base Material: **Brass**

Features

Product Type Features

Splice Type	Pigtail Splice, Thru Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Serrations	3
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.629 g
Splice Features	Serrated

Contact Features

Contact Base Material	Brass
Barrel Type	Open



Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	7000 – 12000 CMA
Terminal Material Thickness	.78 mm[.031 in]
Product Length	6.8 mm[.267 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	3500
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 2837449-2
[OCEAN_2.0_Applicator-S-180F-RSA](#)



TE Part # 2837449-1
[OCEAN_2.0_Applicator-S-180F-RSM](#)

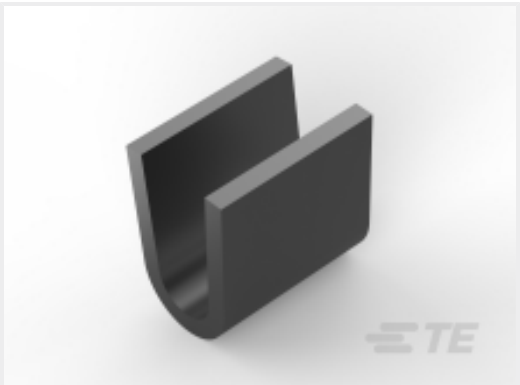

TE Part # 63414-1
[SPLICE 9000-16000 .031 TPST](#)




TE Part # 61300-1
[SPLICE IS 10000-16000 .031 TPST](#)



KIT
REPRESENTATION ONLY

TE Part # 7-2837449-7
[OCEAN_2.0_SPARE_PART_KIT-180F](#)

Also in the Series | SPLICE

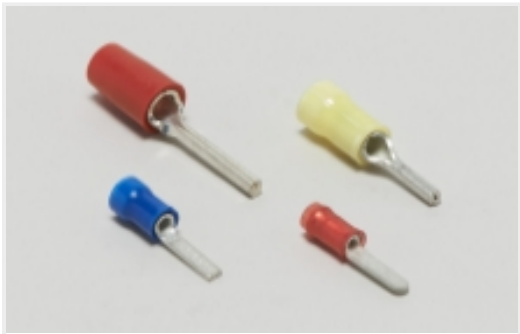






[Crimp Wire Pins, Tabs & Ferrules\(1\)](#)



[Splices\(63\)](#)

Customers Also Bought

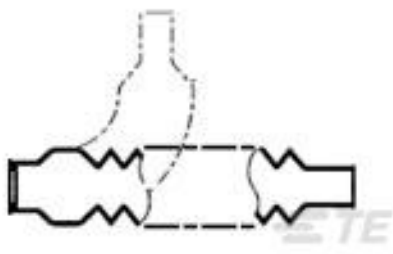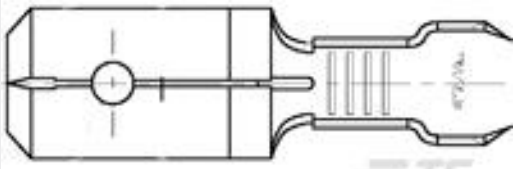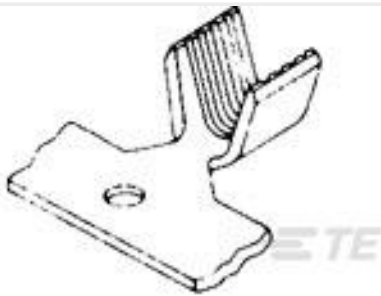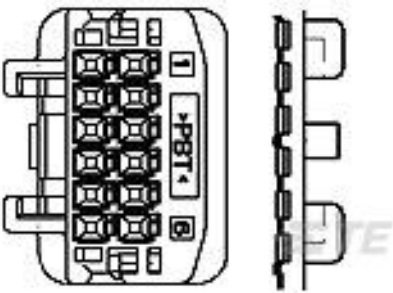

 TE Part #430328-000 202C621-51/164-0	 TE Part #42474-4 250 FASTON TAB 18-14 AWG TPBR	 TE Part #63562-1 SPLICE 10400-22900 030TPBR	 TE Part #91337-1 SIZE 16 PRO-CRIMPER ASSY.
 TE Part #500004-1 SPIRAP 1/4" FR PE, WHITE, 50FT	 TE Part #640253-2 RING TONGUE .190 16-12 AWG TPBR	 TE Part #776487-3 AS16,PLUG ASSY,ST,04P,N SEAL, CODE C	 TE Part #1355437-2 MCP9,5 EINZELDICHTG
 TE Part #1565804-2 025 G 8POS CAP ASSY W TO W	 TE Part #1-1586362-6 16P MINI UMNL SEAL,DIE CUT		

Documents

Product Drawings
SPLICE 7000-12500 .032 TPBR
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_61299-2_AF_c-61299-2-af.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_61299-2_AF_c-61299-2-af.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_61299-2_AF_c-61299-2-af.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Application Specification

English

Agency Approvals

UL Report

English