




Terminals & Splices > PCB Terminals

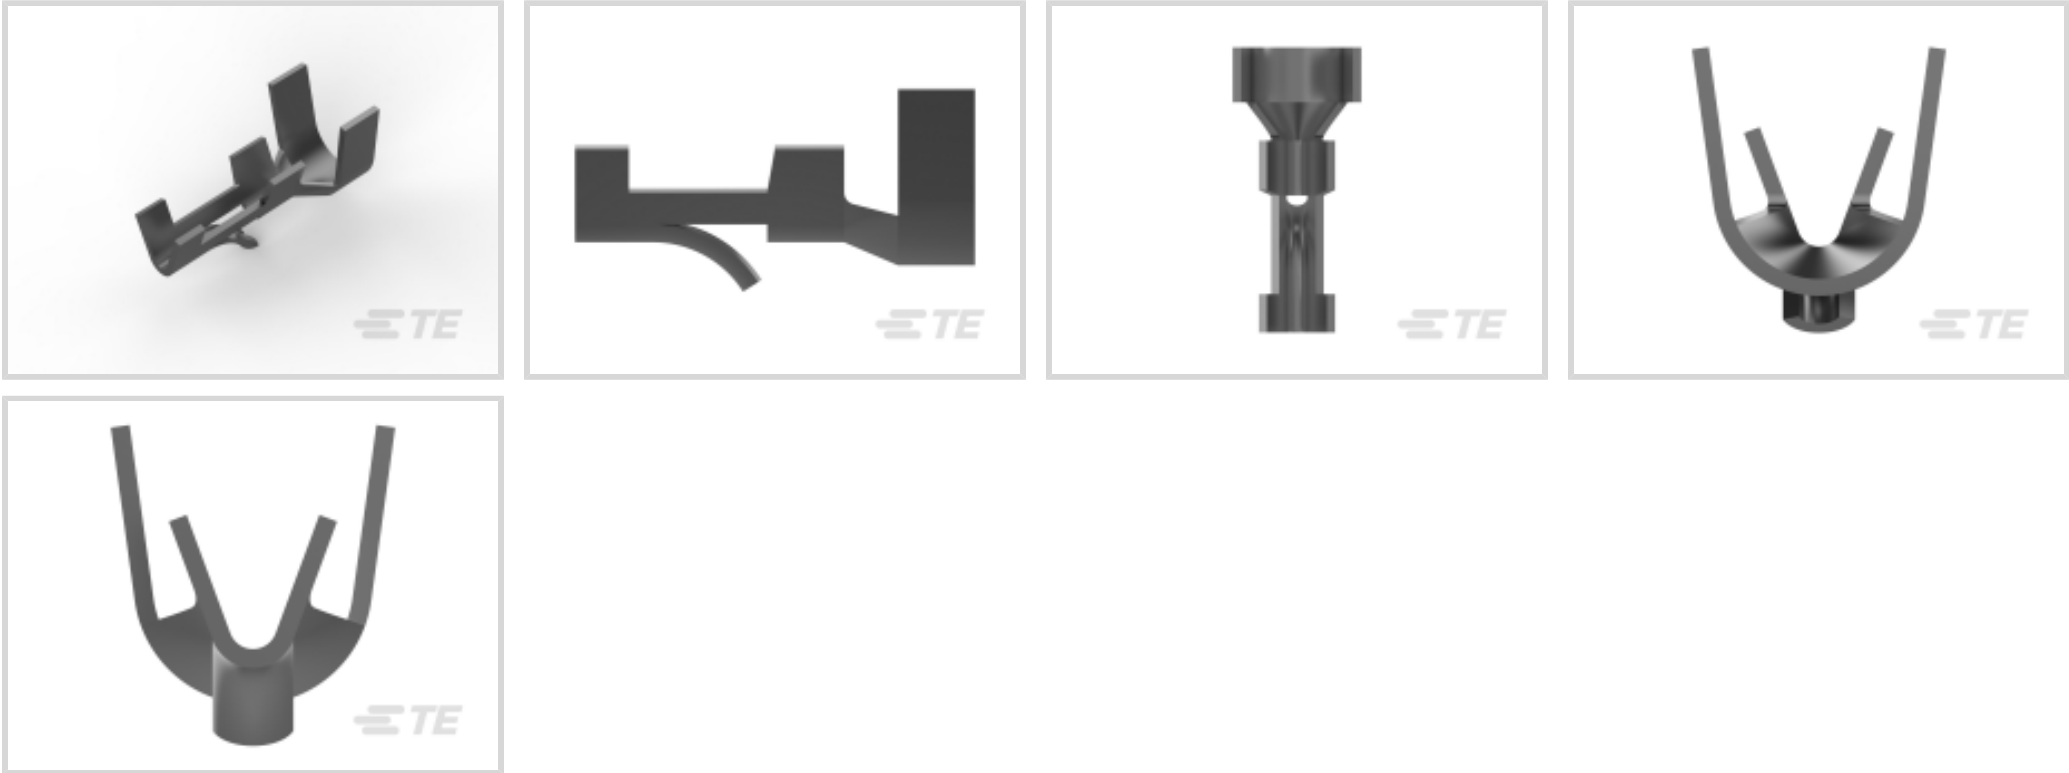

PCB Terminal Type: **PCB Pin**

PCB Thickness (Recommended): **1.57 mm [.062 in]**

PCB Hole Diameter: **1.4 mm [.055 in]**

Profile Height from PCB: **1.35 mm [.053 in]**

Compatible Insulation Diameter (Max): **2.54 mm [.1 in]**

Features

Product Type Features

Terminal Features	Stud Hole
-------------------	-----------

Contact Features

Terminal Plating Finish	Bright
Contact Mating Area Plating Material Thickness	5.08 µm[200 µin]
PCB Terminal Type	PCB Pin
Terminal Plating Material	Pre-Tin
Terminal Size	Miniature
Terminal Orientation	Straight

Termination Features

Termination Method to PCB	Through Hole - Solder
Product Terminates To	Printed Circuit Board

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions



Extension Below Board	3.68 mm[.145 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
PCB Hole Diameter	1.4 mm[.055 in]
Profile Height from PCB	1.35 mm[.053 in]
Compatible Insulation Diameter (Max)	2.54 mm[.1 in]
Compatible Insulation Diameter Range	1.02 – 2.54 mm[.04 – .1 in]
Wire Size	.12 – .4 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Packaging Features

Packaging Quantity	9000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp

TE Part # 172020-1
13P MINI AMPIN HEADER HSG

TE Part # 7-2266321-8
OCEAN_2.0_SPARE_PART_KIT-042F110F

TE Part # 2266321-2
OCEAN_2.0_Applicator-S-042F110F-RSA

TE Part # 3-42642-3
AMP-IN TERM IS 22-20 010PTBR

TE Part # 7-2266321-7
OCEAN_2.0_SPARE_PART_KIT-042F110F

TE Part # 2266321-1
OCEAN_2.0_Applicator-S-042F110F-RSM

TE Part # 640311-5
MINI AMP-IN 22-18 AWG POST TIN PLTD

Customers Also Bought

TE Part #63812-1
250 PL MKI REC. 18-14AWG TPBR

TE Part #63820-1
312 FASTON REC 14-10 AWG SPBR

TE Part #1-172469-1
PL 250 HOUSING NATURAL 6/6 NYLON

TE Part #172765-1
PL 250 FLAG REC 14-12 0.40 X 49.2 PTBR

TE Part #CAT-T4827-CH8172
Timer Connector Housing

TE Part #520974-2
ULTRA-POD 250 ASSY REC 14-12 AWG TPBR

TE Part #640388-6
06P MTA156 HDR ASSY RN STR F/L

TE Part #1418408-1
AMP MCP 1.5K, CONTACT



TE Part #2-2176340-5
[CRGCQ 0603 10K 5%](#)

Documents

Product Drawings

[MINI AMP-IN 26-22 SN/PHBZ](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-640401-1_Y.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-640401-1_Y.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-640401-1_Y.3d_stp.zip](#)

English

[3D PDF](#)

English

Customer View Model

[ENG_CVM_3-640401-1_P.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_3-640401-1_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_3-640401-1_P.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS](#)

English

Product Specifications

[Application Specification](#)

English

3-640401-1

PCB Pin PCB Terminal, 1.4 mm [.055 in] PCB Hole, 26 – 22 AWG, .12 – .4 mm² Wire,
Through Hole - Solder, Pre-Tin Plating, Reel

