



Data Sheet | Item Number: 706-100/650-200
Connection cable; 50-pole; with solder pin; Female connector; open-ended; Length: 2 m; Conductor cross-section: 0.25 mm²
<https://www.wago.com/706-100/650-200>

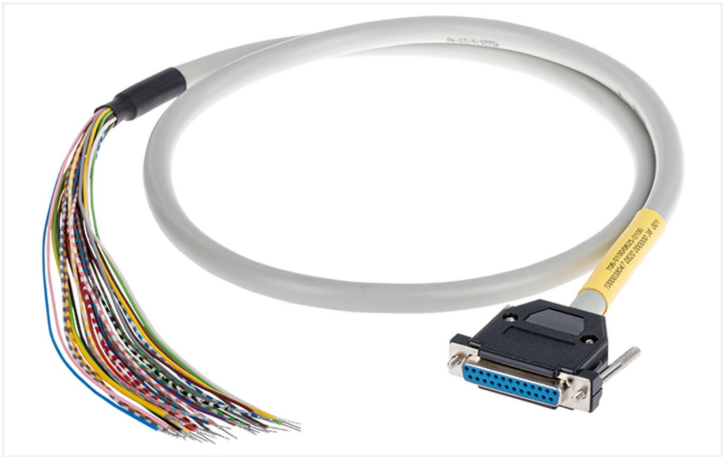

Similar to illustration

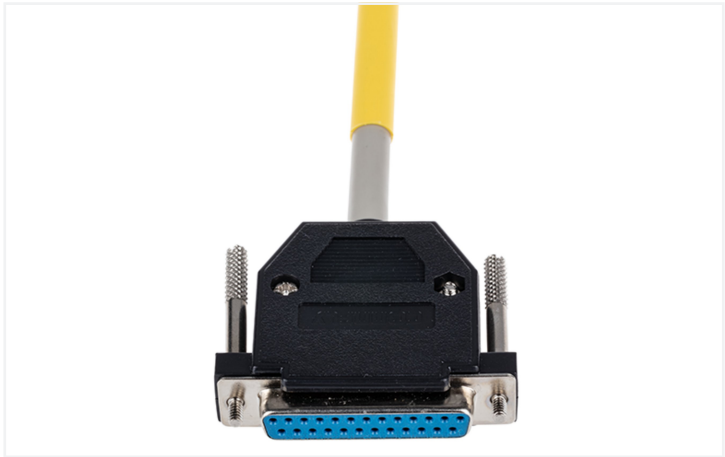

Similar to illustration

Cable color	50 pin female Sub-D connector
White	1
Green	2
Blue	3
Yellow	4
Red	5
Black	6
White	7
Black	8
White	9
Black	10
White	11
Black	12
White	13
Black	14
White	15
Black	16
White	17
Black	18
White	19
Black	20
White	21
Black	22
White	23
Black	24
White	25
Black	26
White	27
Black	28
White	29
Black	30
White	31
Black	32
White	33
Black	34
White	35
Black	36
White	37
Black	38
White	39
Black	40
White	41
Black	42
White	43
Black	44
White	45
Black	46
White	47
Black	48
White	49
Black	50

Notes	
Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data	
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Connection data	
Cable type	LiYCY
Color code	per DIN VDE 47100
Connection 1	
Pluggable connector	D-subminiature female connector
Pole number 1	50
Connection type 1	System
Wire cross-section	0.25 mm²



Connection 2	
Connector 2	open-ended
Connection type	open-ended

Physical data	
Cable length	2 m

Material data	
Fire load	0 MJ
Weight	966 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
ETIM 9.0	EC001855
ETIM 8.0	EC001855
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	FR
GTIN	4055143976404
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
706-100/650-200

↓