


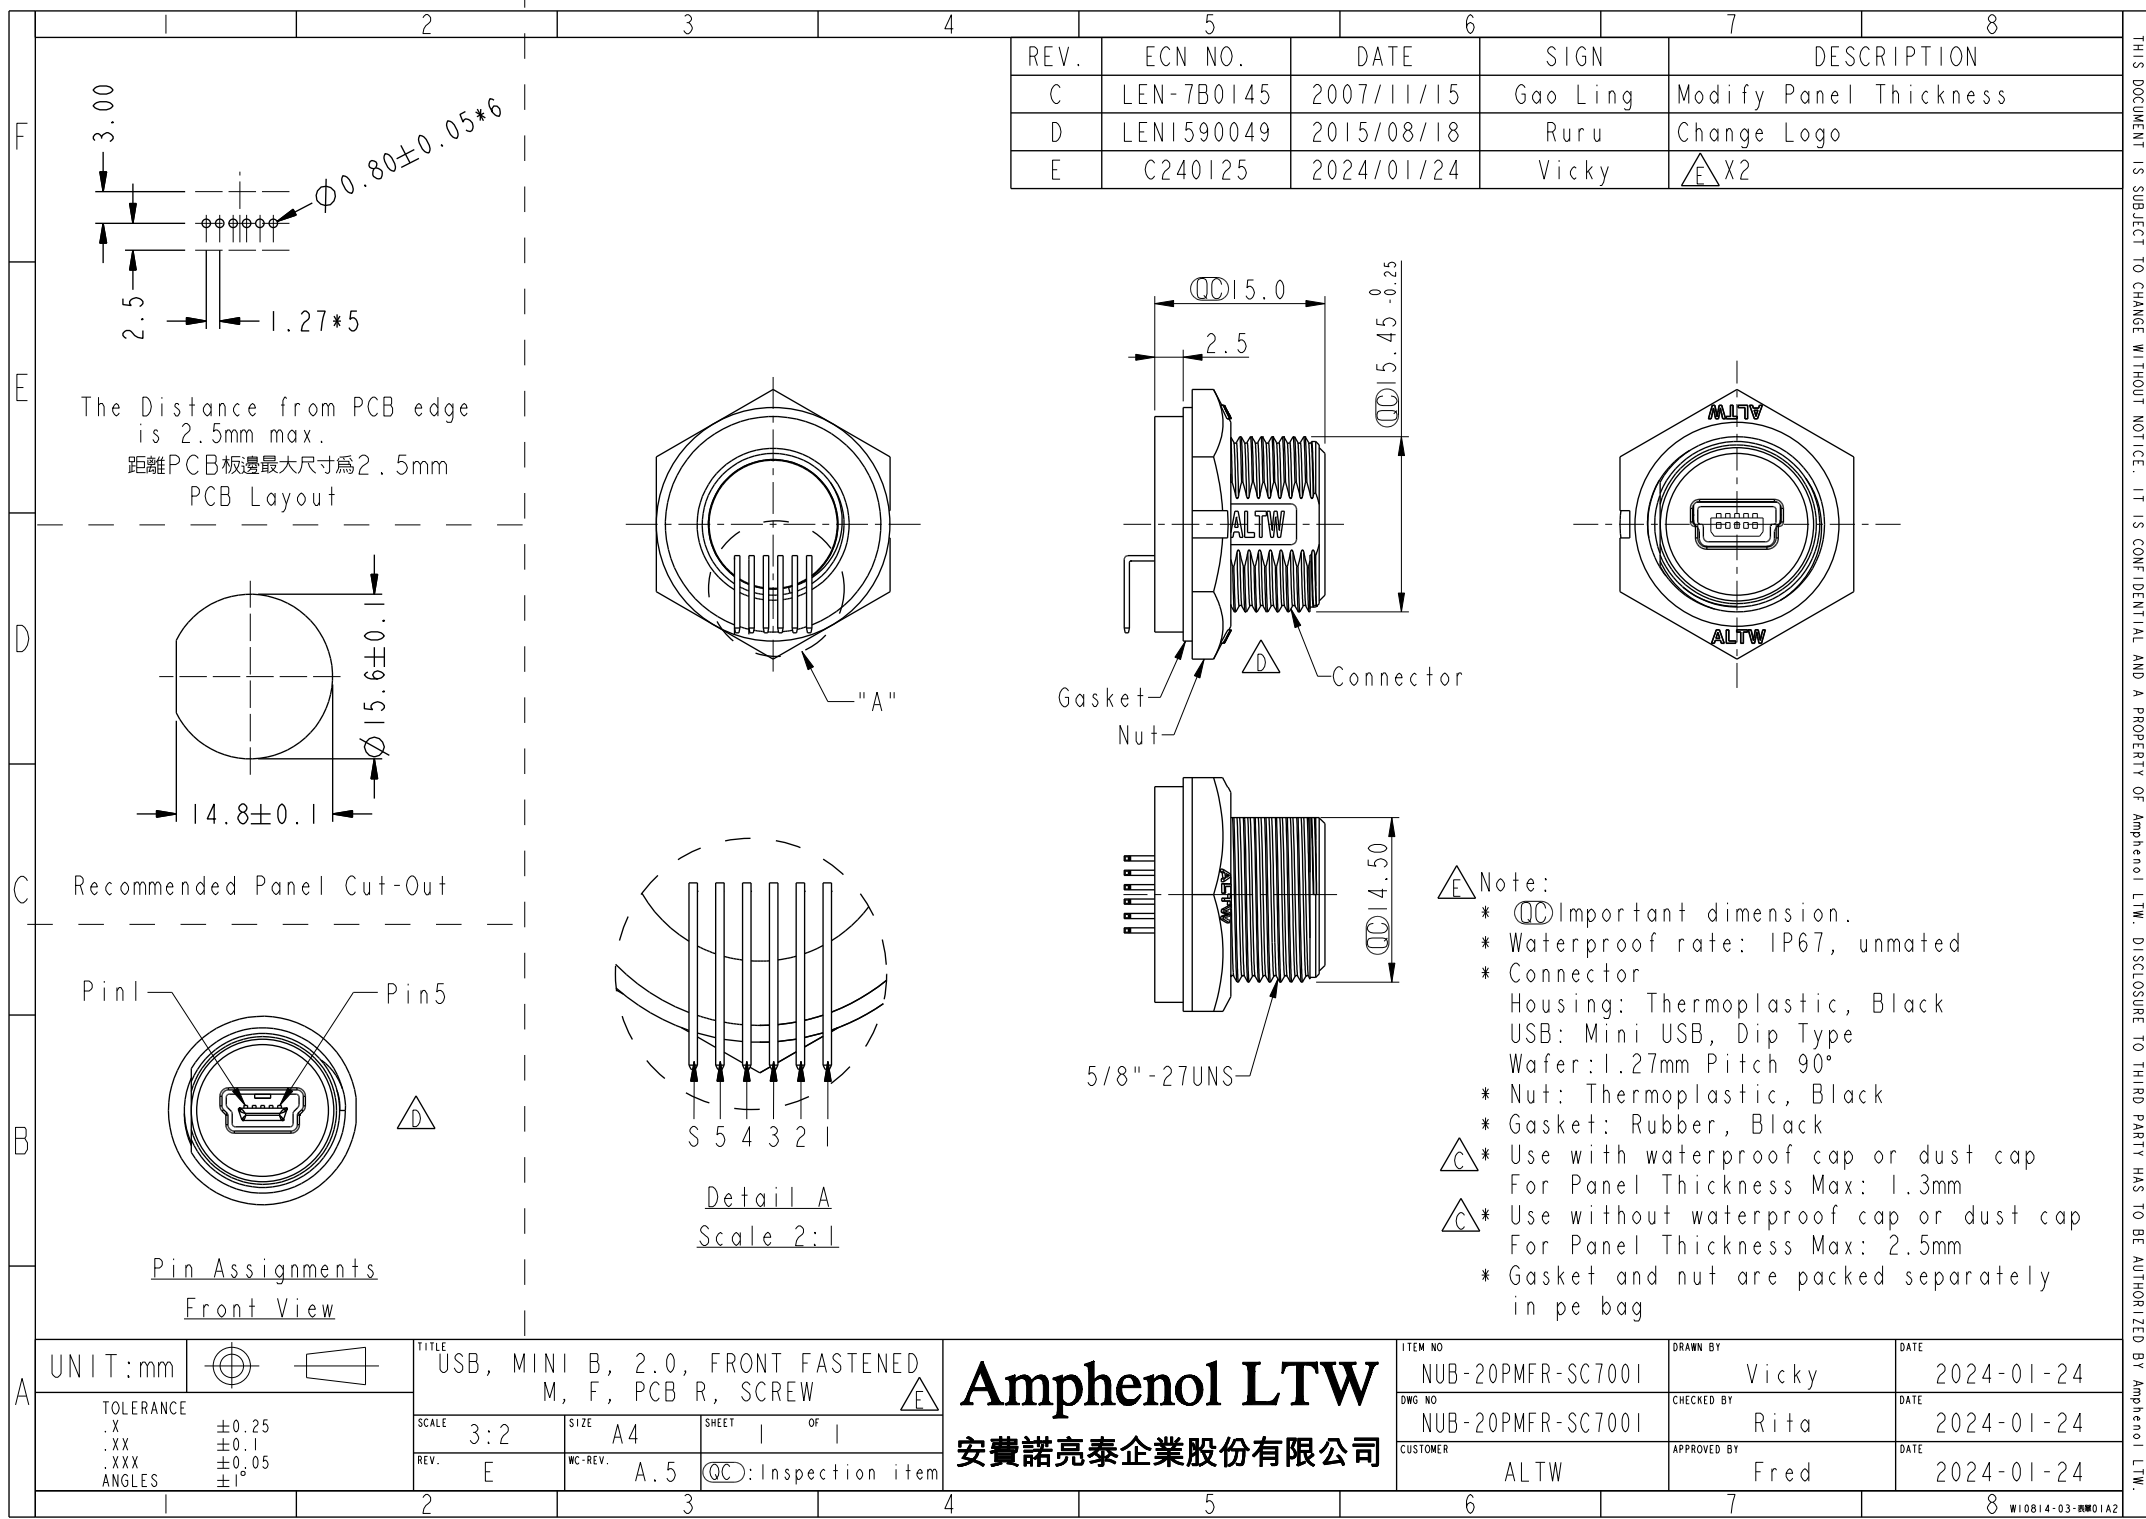

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-7B0145	2007/11/15	Gao Ling	Modify Panel Thickness
D	LEN1590049	2015/08/18	Ruru	Change Logo
E	C240125	2024/01/24	Vicky	△ E X2

- △E Note:
- * ⌀ Important dimension.
 - * Waterproof rate: IP67, unmated
 - * Connector
 - Housing: Thermoplastic, Black
 - USB: Mini USB, Dip Type
 - Wafer: 1.27mm Pitch 90°
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - △C * Use with waterproof cap or dust cap
 - For Panel Thickness Max: 1.3mm
 - △C * Use without waterproof cap or dust cap
 - For Panel Thickness Max: 2.5mm
 - * Gasket and nut are packed separately in pe bag

A	UNIT:mm				TITLE USB, MINI B, 2.0, FRONT FASTENED M, F, PCB R, SCREW		Amphenol LTW		ITEM NO NUB-20PMFR-SC7001		DRAWN BY Vicky		DATE 2024-01-24		
	TOLERANCE		SCALE 3:2		SIZE A4		SHEET 1 OF 1		DWG NO NUB-20PMFR-SC7001		CHECKED BY Rita		DATE 2024-01-24		
	.X ±0.25		REV. E		WC-REV. A.5		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Fred		DATE 2024-01-24		
	.XX ±0.1														
	.XXX ±0.05														
ANGLES ±1°															
1		2		3		4		5		6		7		8 W10814-03-0001A2	