



Relays & Contactors > Electromechanical Relays > Power Relay, 75A, Standard, Monostable, DC



Relay & Contactor Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form A SPST-NO**

Current Type: **DC**

Contact Current Rating: **75 A**

[All Power Relay, 75A, Standard, Monostable, DC \(19\)](#)

Features

Product Type Features

|                        |                             |
|------------------------|-----------------------------|
| Relay & Contactor Type | General Purpose Power Relay |
|------------------------|-----------------------------|

Configuration Features

|                         |                        |
|-------------------------|------------------------|
| Coil Special Features   | Coil Suppression Diode |
| Contact Number of Poles | 1                      |
| Contact Arrangement     | 1 Form A SPST-NO       |

Electrical Characteristics

|                        |        |
|------------------------|--------|
| Coil Resistance        | 76 Ω   |
| Contact Current Rating | 75 A   |
| Coil Voltage Rating    | 28 VDC |
| Contact Voltage Rating | 28 VDC |
| Coil Power Rating DC   | 10 W   |

Body Features

|                |                        |
|----------------|------------------------|
| Enclosure Type | Environmentally Sealed |
|----------------|------------------------|

Contact Features

|                  |              |
|------------------|--------------|
| Contact Material | Silver Alloy |
|------------------|--------------|



Termination Features

|                                         |            |
|-----------------------------------------|------------|
| Auxiliary Termination & Connection Type | M4 Screw   |
| Main Termination & Connection Type      | M5 Screw   |
| Coil Termination & Connection Type      | M3.5 Screw |

Mechanical Attachment

|                               |                   |
|-------------------------------|-------------------|
| Product Mounting Feature Type | Mounting Brackets |
| Product Mount Type            | Chassis Mount     |

Dimensions

|                |                  |
|----------------|------------------|
| Product Width  | 62 mm[2.44 in]   |
| Product Length | 82.5 mm[3.24 in] |
| Product Height | 50 mm[1.969 in]  |

Usage Conditions

|                                         |                           |
|-----------------------------------------|---------------------------|
| Operating Temperature Range             | -40 – 85 °C[-40 – 185 °F] |
| Environmental Ambient Temperature (Max) | 85 °C[185 °F]             |

Operation/Application

|                      |            |
|----------------------|------------|
| Coil Magnetic System | Monostable |
| Current Type         | DC         |

Packaging Features

|                  |        |
|------------------|--------|
| Packaging Method | Carton |
|------------------|--------|

Other

|                           |                                  |
|---------------------------|----------------------------------|
| Contact Current Class     | >50 – ≤200 A                     |
| Height Class (Mechanical) | >45 – ≤70 mm[>1.772 – ≤2.756 in] |
| Length Class (Mechanical) | >70 mm[>2.756 in]                |
| Width Class (Mechanical)  | >33 mm[>1.299 in]                |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                    |
|-----------------------------------------------|----------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Not Compliant                                      |
| EU ELV Directive 2000/53/EC                   | Compliant with Exemptions                          |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量超出标准 Restricted Substance(s) Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)       |



Candidate List Declared Against: JAN 2025  
(247)  
SVHC > Threshold:  
Pb (93.2% in 17071202736)

Article Safe Usage Statements:  
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

|                           |                                            |
|---------------------------|--------------------------------------------|
| Halogen Content           | Not Yet Reviewed for halogen content       |
| Solder Process Capability | Not reviewed for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-AL6-KSPR2975  
Power Relay, 75A, Standard, Monostable, DC


Also in the Series | KISSLING Series 29



Automotive Relays(127)

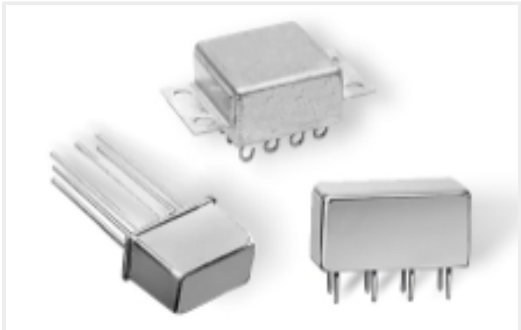

DC Relays(127)

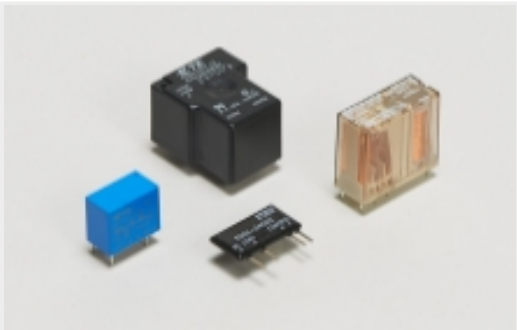

General Purpose Power Relays(127)

Customers Also Bought



TE Part #K1131593  
[Relay-ECS 26-05-99-913](#)

TE Part #K1021599  
[Relay 29-221-12](#)

TE Part #K1013578  
[Relay 26-08-78](#)

TE Part #CAT-ST858-H342  
[DEUTSCH Strike Headers](#)

TE Part #K1012918  
[Relay 26-70-04](#)

TE Part #K1129773  
[Limit switch G13-01-1900](#)

TE Part #YDS00-12S-07200000  
[RECP ASSY](#)

TE Part #DT15-08PA-G003  
[HDR, 8P, GRY, ST, AU/NI/CU, A](#)

TE Part #AAC7897-00  
[PE93-6.0-T](#)

Documents

Product Drawings  
[Relay 29-011-12A](#)

German

CAD Files  
[3D PDF](#)

3D

Customer View Model  
[ENG\\_CVM\\_CVM\\_29-011-12A\\_A.2d\\_dxf.zip](#)

English

Customer View Model  
[ENG\\_CVM\\_CVM\\_29-011-12A\\_A.3d\\_igs.zip](#)

English

Customer View Model  
[ENG\\_CVM\\_CVM\\_29-011-12A\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



KISSLING SINGLE POLE POWER RELAYS Series 29 / 75A

English